

Magnetski prekidač Serija VNC/VNP/RV2I/DCP2






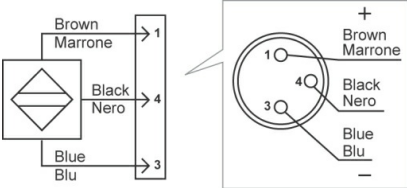


Izvedba	Reed prekidač Tip VNCR2, VNPR2, RV2I, DCP2 elektronički prekidači Tip VNCE3, VNPE3 svi prekidači s LED-om
Aktiviranje	pomoću trajnog magneta
Temperatura okoline	-20...+85°C, DCP2 -20...+75°C
Način pričvršćivanja	u utoru cilindra odnosno s pomoću Pričvrsni element
Funkcija	Normalno zatvoren (NC) odnosno elektronički prekidači 3-žilni PNP
Stupanj zaštite	IP67

Cilindar/Hvataljka	Promjer [mm]	Tip prekidača	Pričvrsni element
ACM	16-25	VN../RV2I	FFS01VN
ACMT	32-50	VN../RV2I	FFS02VN
AW	32-100	VN../RV2I	nema
CRW	25-100	VN../RV2I	nema
DVM	12	VN..	FFS01VN
DVM	16-25	VN../RV2I	FFS01VN
MHM	20-32	VN../RV2I	nema
MHM	50	DCP2	nema
NSKU/NSKI	16-100	VN../RV2I	nema
NWT	32-125	VN../RV2I	nema
XJC	160-200	VN../RV2I	FJS160VN, FJS200VN




Magnetski prekidač

DCP2		
VNPR2/RV2I		
VNCR2		
VNPE3		
VNCE3		


Napon [V]	maksimalna struja [mA]	maksimalna snaga [VA]/[W]	električni vijek trajanja	Kontaktni otpor	Duljina kabela [m]	Tip
3...110 AC/DC	300	10/10	10^7	0,1	3 (uklj. uređajnu utičnicu)	DCP2
10...250 AC/DC	250	8/8	10^7	0,1	2,5	RV2I
3...48 AC/DC	100	6	10^7	0,1	-	VNCR2
3...48 AC/DC	100	6	10^7	0,1	3	VNPR2
6...30 DC	200	4	10^9	-	-	VNCE3
6...30 DC	200	4	10^9	-	3	VNPE3



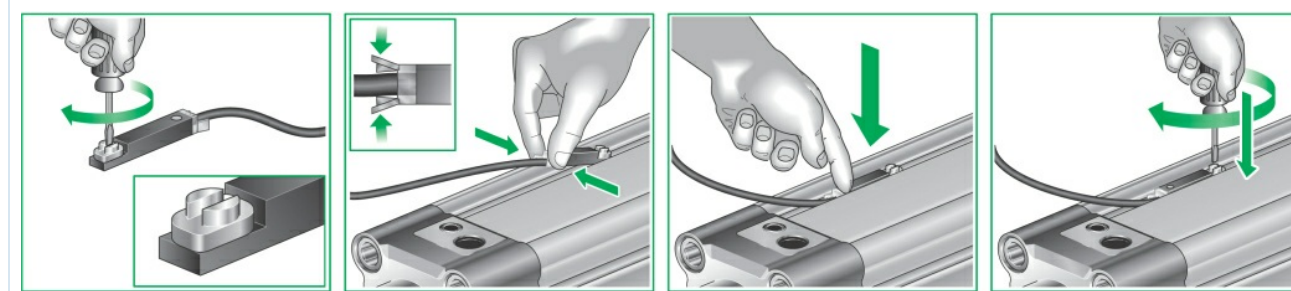
Upute za montažu za Magnetski prekidač



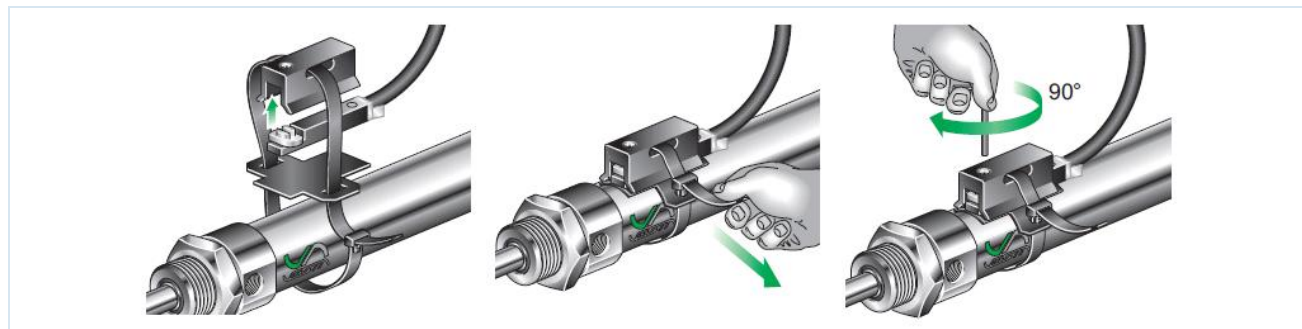Upute za montažu za Cilindar prema ISO6432



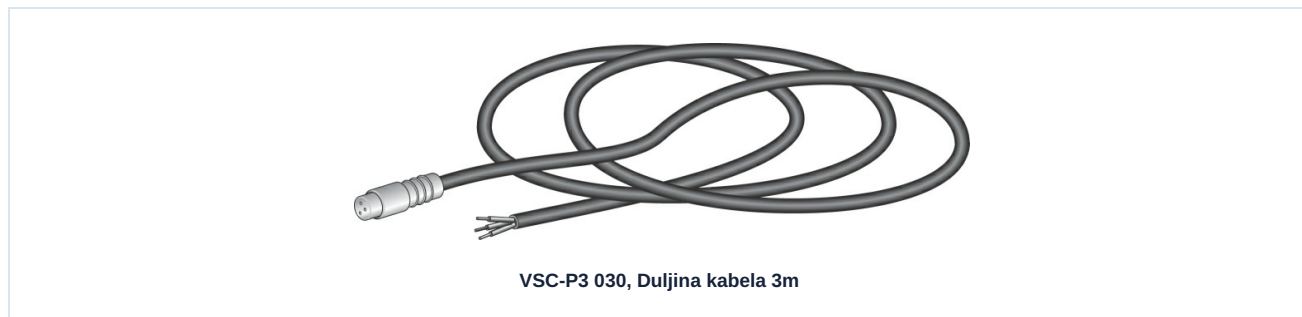Produžni kabel za Magnetski prekidač Serija VNC



Slike nisu obvezujuće
Zadržavamo pravo na konstrukcijske, dimenzijske i promjene materijala.

Pneumatika / Radni elementi / Magnetni prekidač s priborom / Magnetni prekidač Serija VN/RV

