



Solenoid switch for rodless cylinders of the RL series Type ZRS11

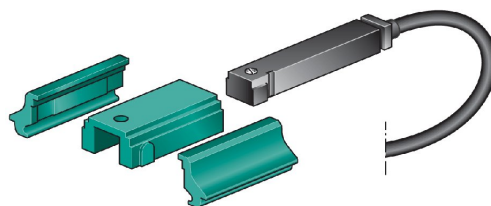

Design type	Reed switch
Actuation	by permanent magnet
Ambient temperature	-15°C...+60°C
Mounting type	in the cylinder groove
Function	Normally closed (NC)
Degree of protection	IP67, with correctly mounted device socket


Characteristics, Dimensional drawing



Cable length: 5 m

Voltage [V]	Current [mA]	Power [W]	Electrical service life	On-, off time	Type
5-130 AC-DC	200mA	6	10 ⁷	1 - 0,3 msec	ZRS11

Assembly instructions

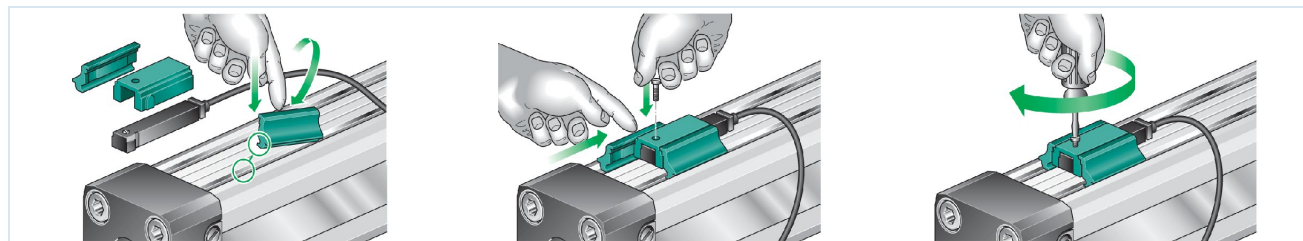

Illustrations non-binding

Design, dimensional and material changes reserved

Pneumatics / Cylinders / Magnetic switches with accessories / Magnetic switch Series ZRS

