








3/2-Way spool valve, 1/8" up to 1/2"

Series V32V




Design type	3/2-way spool valve, Actuation pneumatic/spring, pneumatic/internal control air or rather pneumatic/pneumatic
Connection	G1/8"...G1/2" according to ISO228/1
Materials	Body Aluminium, Slide valve Nickel-plated aluminium, Seals NBR
Mounting type	Through bores in the valve body
Mounting position	any
Medium	filtered and lubricated or non-lubricated compressed air
Medium temperature	0...+40°C
Ambient temperature	-10...+50°C
Note	CAD files are available in the STASTO Store at www.stasto.eu


Flow diagram




V32V1P ... Actuation pneumatic/spring, pneumatic/internal pilot air



Actuation
pneumatic/spring





Actuation
pneumatic/internal pilot air

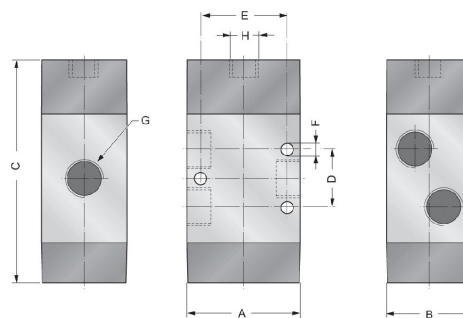

Connection G	Nominal size DN [mm]	Pressure range [bar]	Flow rate [Nl/min]	Function	Resetting	A	B	C	D	E	F	H	Type
G1/8"	6	2,7-10	650	NC	Spring	30	26	74	18	23	4,25	1/8"	V32V1P6M8
G1/8"	6	2,7-10	650	NO	Spring	30	26	74	18	23	4,25	1/8"	V32V1P9M8
G1/8"	6	4,5-10	650	NC	internal pilot air	30	26	74	18	23	4,25	1/8"	V32V1P618
G1/8"	6	4,5-10	650	NO	internal pilot air	30	26	74	18	23	4,25	1/8"	V32V1P918
G1/4"	8	2,7-10	1080	NC	Spring	40	30	81,5	20	30	4,25	1/8"	V32V1P6M4
G1/4"	8	2,7-10	1080	NO	Spring	40	30	81,5	20	30	4,25	1/8"	V32V1P9M4
G1/4"	8	4-10	1080	NC	internal pilot air	40	30	81,5	20	30	4,25	1/8"	V32V1P614
G1/4"	8	4-10	1080	NO	internal pilot air	40	30	81,5	20	30	4,25	1/8"	V32V1P914
G1/2"	15	2,7-10	3500	NC	Spring	60	40	127	40	50	5,5	1/8"	V32V1P6M2
G1/2"	15	2,7-10	3500	NO	Spring	60	40	127	40	50	5,5	1/8"	V32V1P9M2
G1/2"	15	4-10	3500	NC	internal pilot air	60	40	127	40	50	5,5	1/8"	V32V1P612
G1/2"	15	4-10	3500	NO	internal pilot air	60	40	127	40	50	5,5	1/8"	V32V1P912

Reference pressure 6 bar, Reference temperature 20°C

V32P201. Actuation pneumatic/pneumatic

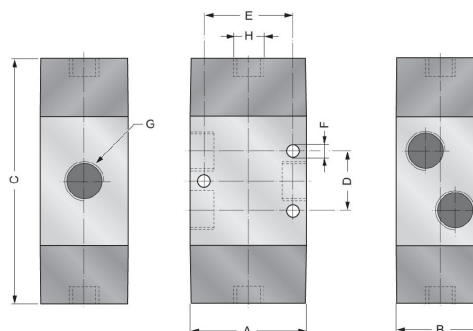

Connection G	Nominal size DN [mm]	Pressure range [bar]	Flow rate [Nl/min]	A	B	C	D	E	F	H	Type
G1/8"	6	1,3-10	650	30	26	79	18	23	4,25	1/8"	V32V2P018
G1/4"	8	1,3-10	1080	40	30	87	20	30	4,25	1/8"	V32V2P014
G1/2"	15	1,3-10	3500	60	40	132	40	50	5,5	1/8"	V32V2P012

Reference pressure 6 bar, Reference temperature 20°C

Illustrations non-binding

Design, dimensional and material changes reserved

Pneumatics / Way-valves - electrically / pneumatically / 3/2- 5/2- 5/3-way valves - series E+V (connector size 22mm) / 3/2-way valve Series V3

Version 13

138298 / Generated 2026/40 EN

MADE IN EUROPE

+43 512 52076

austria@stasto.eu

© STASTO Automation KG

www.stasto.com

Open series online

Page 2 / 2

