


pneumatic time function element type PC005



function	at the end of the adjusted time the following function results. NC: pressure inlet connection a, air relieving connection b, outlet positive NO: pressure inlet connection b, air relieving connection a, outlet negative
connection	push-in fitting for outside hose diameter 4mm
materials	body POM, inner parts brass/POM, seals NBR, springs stainless steel
type of fixing	through-holes in the valve body, mounting on DIN rail according to EN60715
nominal diameter	2,7mm
operating pressure	2,5...8bar
medium	filtered and lubricated or non lubricated compressed air, grade of filtration 20µm
operating temperature	-10...+50°C
reset	by removing the signal at port X
min. recovery time	< 0,5s
accuracy	± 2%
outlet signal	2,5...8bar depending of the operating pressure

dimension

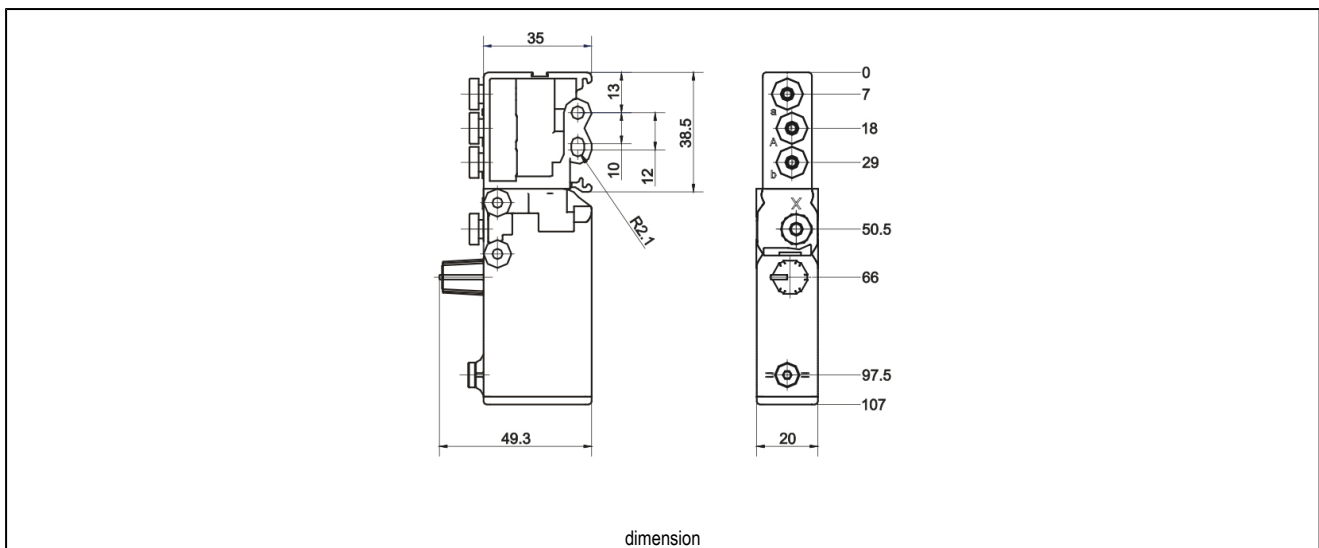

delay time [s]	weight app. [g]	type
0...10	75	PC005-10
0...30	75	PC005-30

illustrations are for information only and are non-binding
all designs, configurations, measurements and materials are subject to change without prior notice