

Logički elementi

Tip AND42, OR42, YES, NOT-S, MV32



AND42, OR42



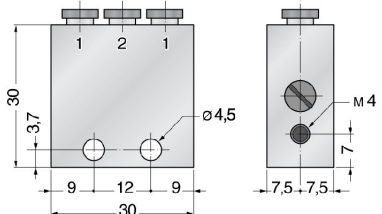

MV32



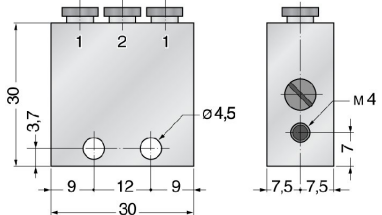

YES, NOT-S

Priključak	4 mm priključak na utiskivanje MV32: G1/8" ... G1/4"
Opseg pritiska	2...10bar
Protok	95 NI/min MV32: 500 NI/min odnosno 1100 NI/min
Medij	filtrirani i podmazani ili nepodmazani komprimovani vazduh
Napomena	CAD datoteke dostupne su u STASTO Store na www.stasto.eu

AND42 I element



	Funkcija	Tip
		AND42

OR42 ILI-element

	Funkcija	Tip
		OR42



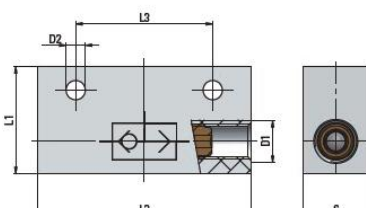
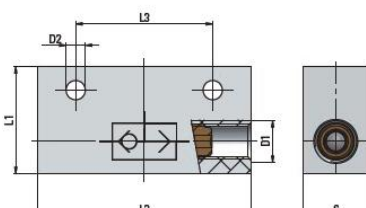

YES YES-element

	Funkcija	Tip
		YES YES

NOT-S NOT-element

	Funkcija	Tip
Technical drawing of the NOT-S component. The top view shows a rectangular component with a width of 30 and a length of 49,6. It features three circular features labeled 1, 2, and X. The side view shows a height of 7,5 and a width of 30. It includes a central slot with a width of 7 and a mounting hole labeled M4. The component is shown with a series of mounting tabs on the right side.	Logic symbol for the NOT-S component. It consists of a square box containing an ampersand (&). The input is labeled 1 and the output is labeled 2. The symbol is connected to a logic circuit diagram showing a NOT gate and a resistor.	NOT-S

MV32 ILI-element

	Funkcija	ILI
		ILI

Priključak D1	D2	L1	L2	L3	S	Protok [l/min]	Tip
G1/8"	4,5	25	50	32	15	500	MV32-00-18
G1/4"	5,5	30	52	35	25	1100	MV32-00-14

Ilustracije neobavezujuće

Zadržavamo pravo na konstruktivne, dimenzione i promene materijala

[Pneumatika](#) / [Pneumatski razvodnici - mehanički/ručni, logičke jedinice](#) / [pneumatske logičke jedinice](#) / [dupli nepovratni ventil serije MV32](#)

