

Logički elementi

Tip AND42, OR42, YES, NOT-S, MV32



AND42, OR42



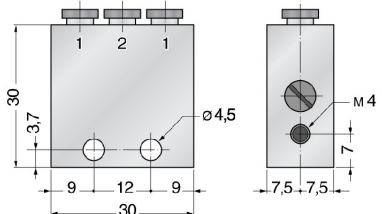

MV32



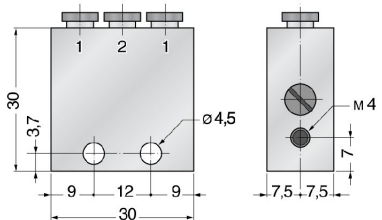

YES, NOT-S

Priključak	4 mm priključak na utiskivanje MV32: G1/8" ... G1/4"
Opseg pritiska	2...10bar
Protok	95 NI/min MV32: 500 NI/min odnosno 1100 NI/min
Medij	filtrirani i podmazani ili nepodmazani komprimovani vazduh
Napomena	CAD datoteke dostupne su u STASTO Store na www.stasto.eu

AND42 I element

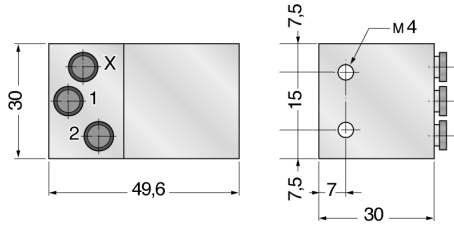
	Funkcija	Tip
		AND42

OR42 ILI-element

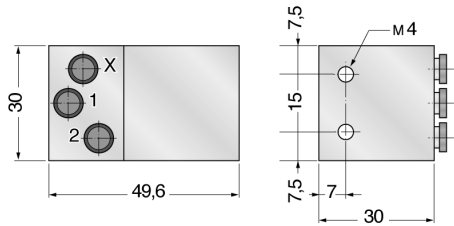
	Funkcija	Tip
		OR42



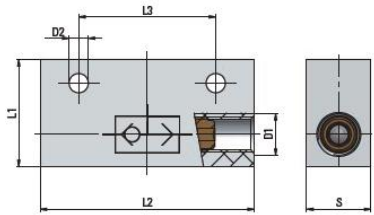
YES YES-element

	Funkcija	Tip
	YES	YES

NOT-S NOT-element

	Funkcija	Tip
	NOT	NOT-S

MV32 ILI-element

	Funkcija
	ILI

Priključak D1	D2	L1	L2	L3	S	Protok [Nl/min]	Tip
G1/8"	4,5	25	50	32	15	500	MV32-00-18
G1/4"	5,5	30	52	35	25	1100	MV32-00-14

Ilustracije neobavezujuće
Zadržavamo pravo na konstruktivne, dimenzione i promene materijala

Pneumatika / Pneumatski razvodnici - mehanički/ručni, logičke jedinice / pneumatske logičke jedinice / dupli nepovratni ventil serije MV32