


Swivel throttle valve Series MV15B



Design type	Needle valve, without swivel piece
Material	Body Brass nickel-plated, Seals NBR and Polyamide (PA)
Function	Flow control, Throttle direction both sides, Actuation with slotted screw
Connection	M5 after ISO R/262, G1/8"...G1/2" after ISO228/1
Mounting position	any
Medium	Compressed air, neutral gases
Medium temperature	0...+70°C
Operating pressure	0...10bar


Dimensions






D1	L1	L2	L3max.	Throttle direction	CH	Weight [g]	Type
M5	4	16	25	both sides	8	5	MV15-00-M5-B
G1/8"	5	24	32	both sides	14	17	MV15-00-18-B
G1/4"	6,5	27,5	40	both sides	17	33	MV15-00-14-B
G3/8"	7	31	50	both sides	20	59	MV15-00-38-B
G1/2"	9	38	61	both sides	26	107	MV15-00-12-B



Flow diagram

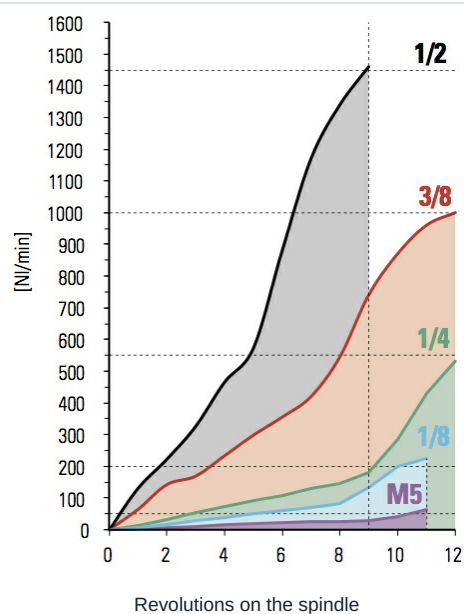

Flow diagrams

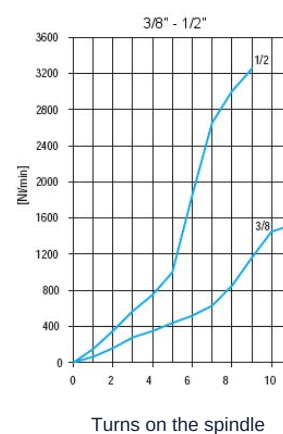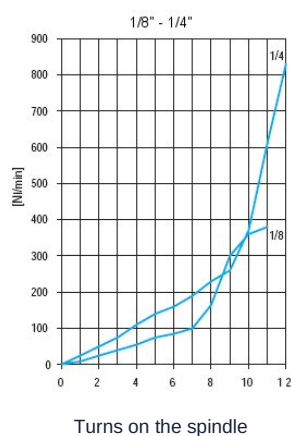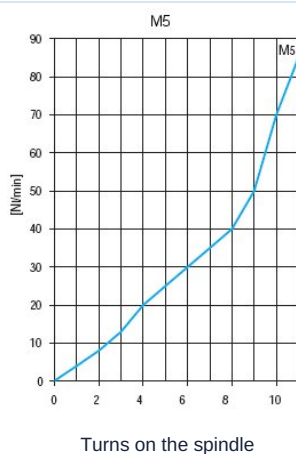

Illustrations non-binding

Design, dimensional and material changes reserved

Pneumatics / Flow control valves / Other materials - P04 / Banjo flow control valve Series MV15-B

Version 6

138359 / Generated 2026/33 EN

MADE IN EUROPE

+43 512 52076

austria@stasto.eu

© STASTO Automation KG

www.stasto.com

Open series online

Page 2 / 2

