


Zakretni prigušni ventil Serija MV15B



Konstrukcija	Igličasti ventil, bez zakretnog elementa
Materijal	Telo Mesing niklovano, Zaptivke NBR i Poliamid (PA)
Funkcija	Regulacija protoka, Smer prigušenja obostrano, Aktiviranje pomoću vijka sa prorezom
Priključak	M5 posle ISO R/262, G1/8"...G1/2" posle ISO228/1
Položaj ugradnje	proizvoljno
Medij	Komprimovani vazduh, neutralni gasovi
Temperatura medijuma	0...+70°C
Radni pritisak	0...10bar


Dimenzije






D1	L1	L2	L3max.	Smer prigušenja	CH	Težina [g]	Tip
M5	4	16	25	obostrano	8	5	MV15-00-M5-B
G1/8"	5	24	32	obostrano	14	17	MV15-00-18-B
G1/4"	6,5	27,5	40	obostrano	17	33	MV15-00-14-B
G3/8"	7	31	50	obostrano	20	59	MV15-00-38-B
G1/2"	9	38	61	obostrano	26	107	MV15-00-12-B



Dijagram protoka

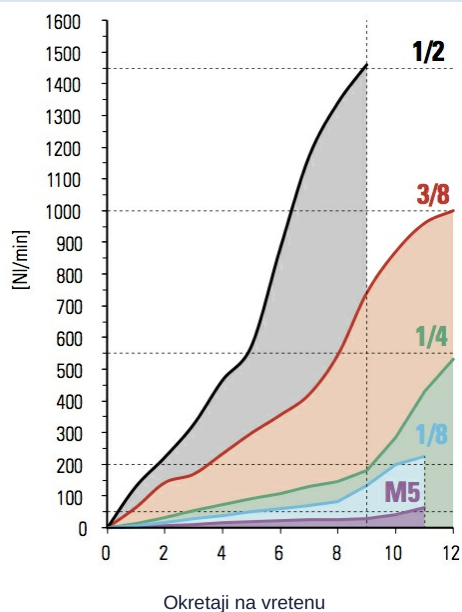

Dijagrami protoka

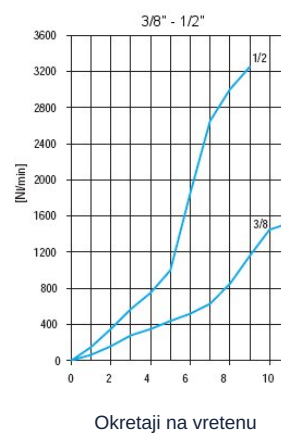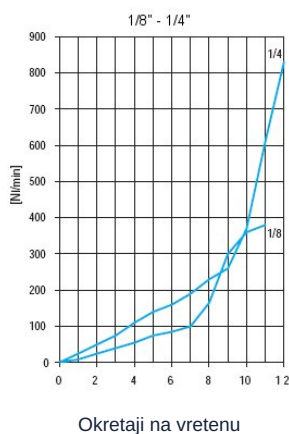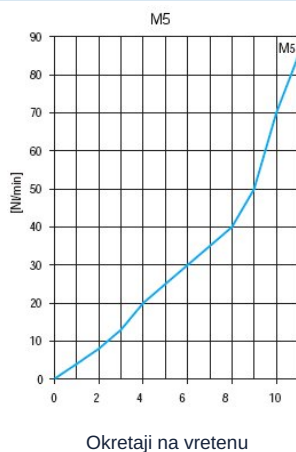

Ilustracije neobavezujuće

Zadržavamo pravo na konstruktivne, dimenzione i materijalne izmene.

Pneumatika / Regulatori protoka i prigušnice / Drugi materijali - P04 / banjo prigušni ventil serije MV15-B

Verzija 6

138359 / Generisano 2026/33 SR

PROIZVEDENO U EVROPI

+381 11 2399521
balkan@stasto.eu
© STASTO Automatizacija d.o.o.

www.stasto.rs

Otvori seriju online

Strana 2 / 2

