


Swivel throttle valve Series MV15MC23-B



Design type	Needle valve, Compression fitting ring piece
Material	Body Brass nickel-plated, Seals NBR and Polyamide (PA)
Function	Flow control, Throttle direction both sides, Actuation with slotted screw
Connection	M5 after ISO R/262, G1/8"...G3/8" after ISO228/1
Hose outside diameter	6mm, 8mm and 10mm
recommended materials	Polyamide (PA), Polyurethane (CP/PU), Polyethylene (PE), Polyamide - highly flexible (PF), PTFE (PT)
Hose tolerances	+/-0,05 mm up to Diameter 10mm
Mounting position	any
Medium	Compressed air, neutral gases
Medium temperature	-20...+70°C
Operating pressure	-0,75...10bar


Dimensions



D1	Hose diameter ØT D/d [mm]	L1	L2	L3max.	L4	Throttle direction	CH	CH2	Weight [g]	Type
M5	6/4	4	16	25	19	both sides	8	9	12	MV15MC23-06-M5-B
G1/8"	6/4	5	24	32	25	both sides	14	12	36	MV15MC23-06-18-B
G1/4"	6/4	6,5	27,5	40	26,5	both sides	17	12	58	MV15MC23-06-14-B
G1/4"	8/6	6,5	27,5	40	27,5	both sides	17	14	60	MV15MC23-08-14-B
G3/8"	8/6	7	31	50	29,5	both sides	20	14	98	MV15MC23-08-38-B
G3/8"	10/8	7	31	50	30,5	both sides	20	16	100	MV15MC23-10-38-B



Flow diagram

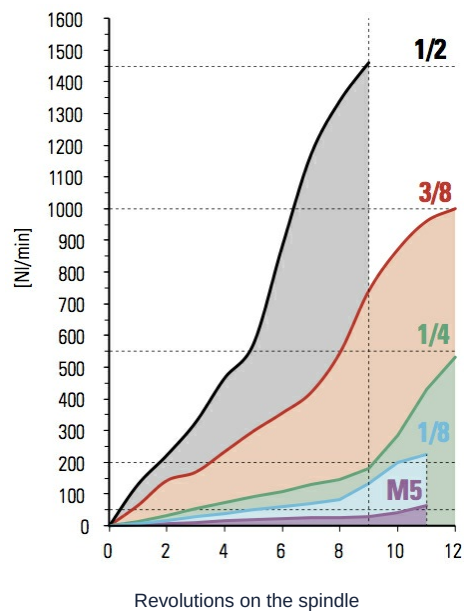

Illustrations non-binding
Design, dimensional and material changes reserved

Pneumatics / Flow control valves / Other materials - P04 / Banjo flow control valve Series MV15MC23-B

