



siphons

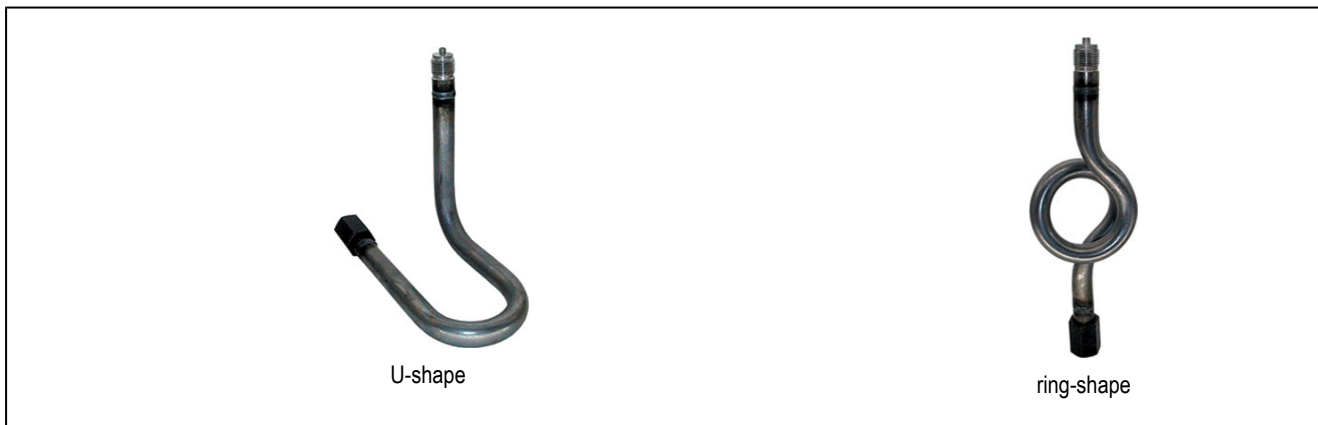


design	siphon in U-shape and ring-shape with clamping sleeve according to DIN16283
connection	connection spigot or welding connection respectively G1/2"
materials	steel or stainless steel AISI 316Ti
medium	liquids, gases and steams which do not affect the used materials
medium temperature	max. 400°C
operating pressure	depending on temperature: 100bar at 120°C, 80bar at 300°C, 63bar at 400°C
pressure tap	U-shape: horizontal only ring-shape: vertical only

dimensions - U-shape

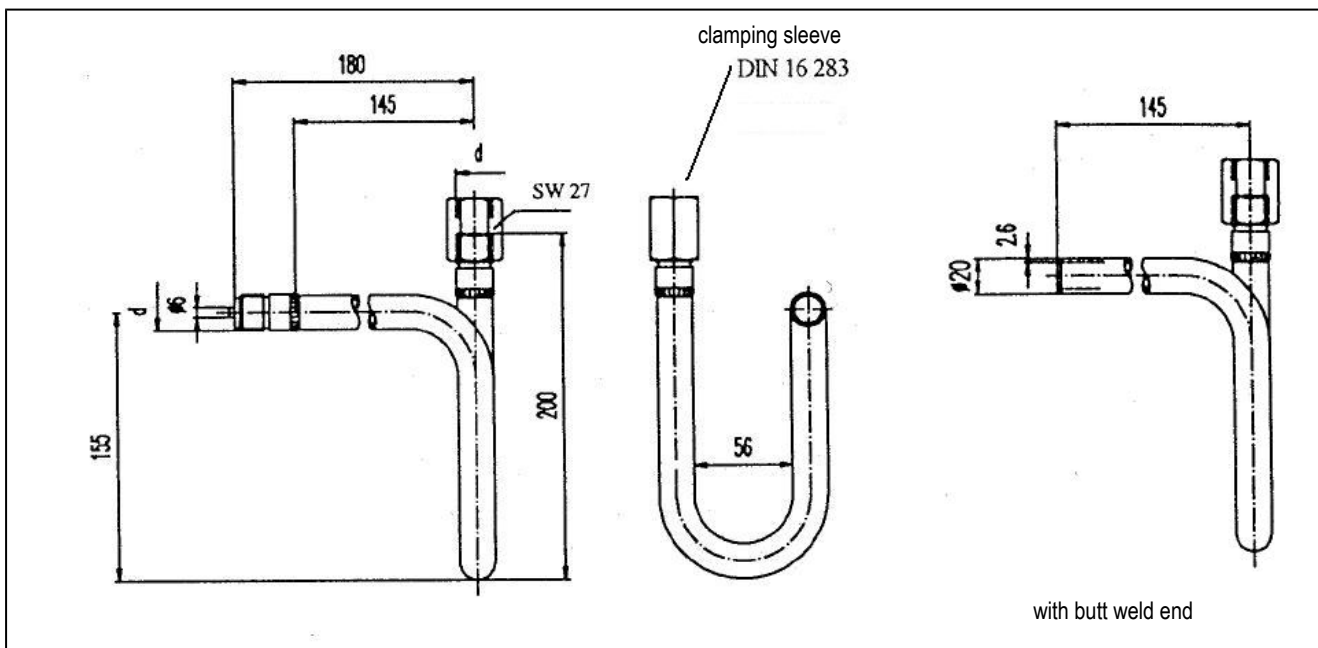

connection	d	material	weight [kg]	type
connection spigot/clamping sleeve	G1/2"	steel	0,17	9072
connection spigot/clamping sleeve	G1/2"	stainless steel AISI 316Ti	0,79	9073
butt weld end/clamping sleeve	G1/2"	steel	0,15	9074
butt weld end/clamping sleeve	G1/2"	stainless steel AISI 316Ti	0,79	9075

dimensions - ring-shape

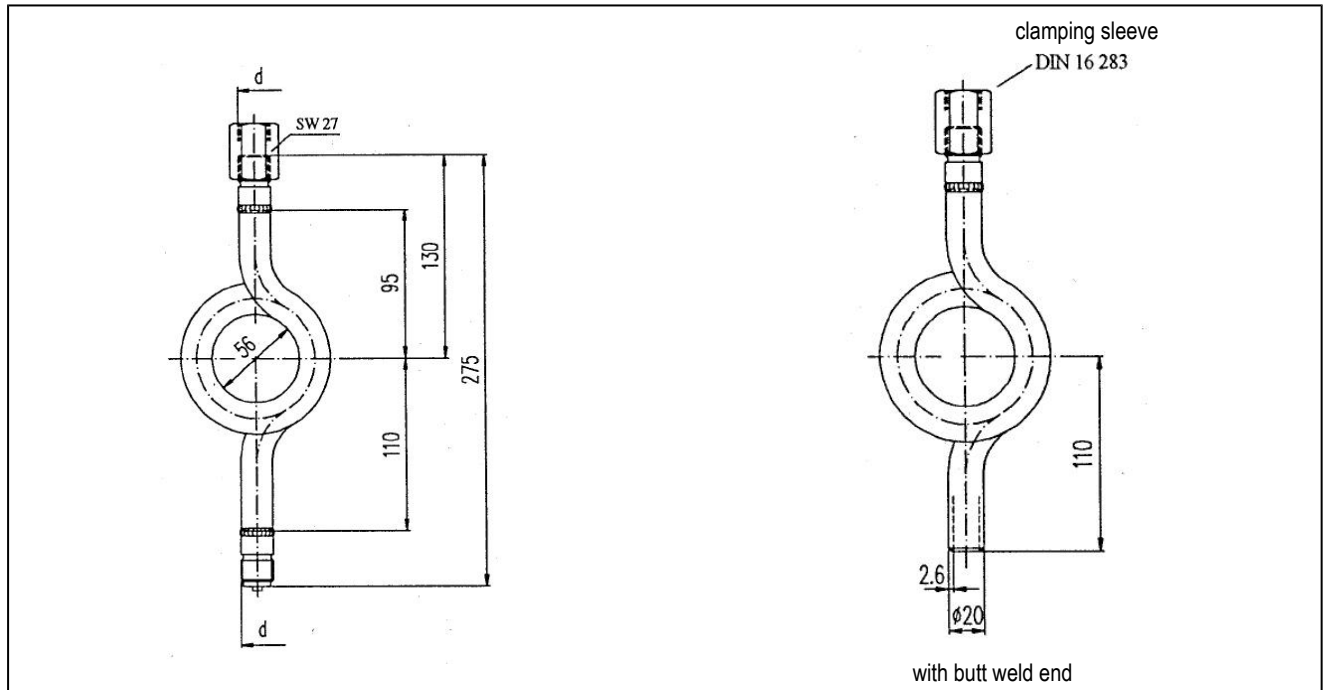

connection	d	material	weight [kg]	type
connection spigot/clamping sleeve	G1/2"	steel	0,17	9082
connection spigot/clamping sleeve	G1/2"	stainless steel AISI 316Ti	0,68	9083
butt weld end/clamping sleeve	G1/2"	steel	0,14	9084
butt weld end/clamping sleeve	G1/2"	stainless steel AISI 316Ti	0,68	9085

illustrations are for information only and are non-binding
all designs, configurations, measurements and materials are subject to change without prior notice