



pressure regulators for blow guns series PR28

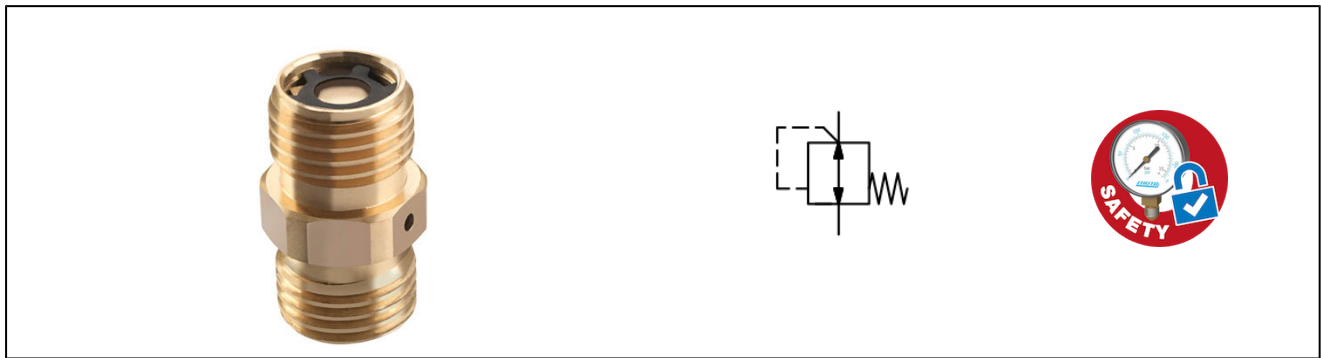

design	piston pressure regulator, fixed pressure set, without relieving
function	this pressure regulator is mounted directly on the blow gun in order to provide it with the exactly needed pressure. since the pressure is set at the factory, this pressure regulator is tamper-proof. the correct pressure at the consumer point increases the life time and lowers energy costs.
connection	G1/4" according to ISO228/1
materials	body brass, inner parts stainless steel/brass/steel, o-ring NBR
medium	filtered compressed air
medium temperature	-20...+60°C
ambient temperature	-20...+60°C
inlet pressure	max. 12bar
control pressure	see table
flow direction	is marked by an arrow
mounting position	any
special versions	NPT thread


dimension

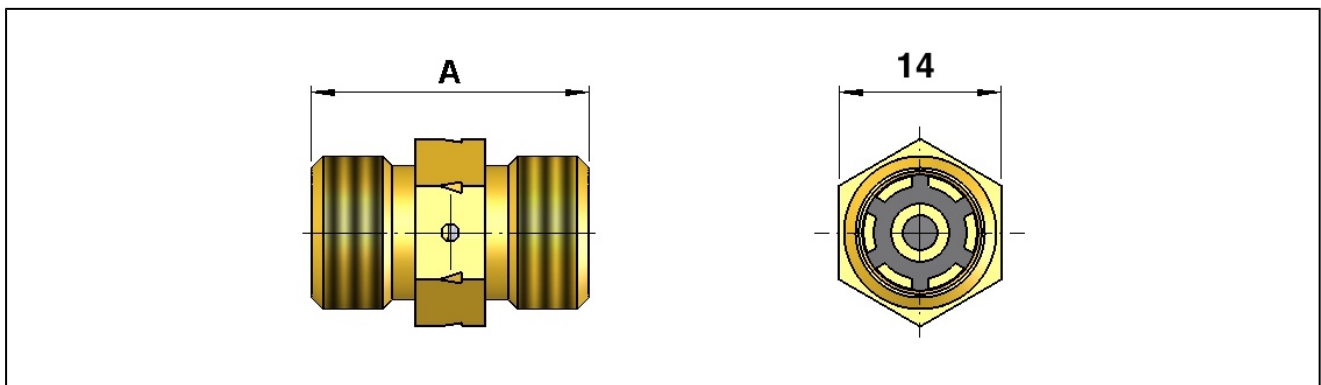

connection	control pressure [bar]	tolerance control pressure [bar]	flow rate* [Nl/min]	A	weight [g]	type
G1/4"	2	+/-0,6	350	24	16	PR28-14-2
G1/4"	3	+/-0,7	350	24	16	PR28-14-3
G1/4"	4	+/-0,8	350	24	16	PR28-14-4
G1/4"	6	+/-1,0	350	24	16	PR28-14-6
G1/4"	8	+/-1,2	350	24	16	PR28-14-8

*flow rate at input pressure of 12bar and 0,5bar pressure drop

application drawing

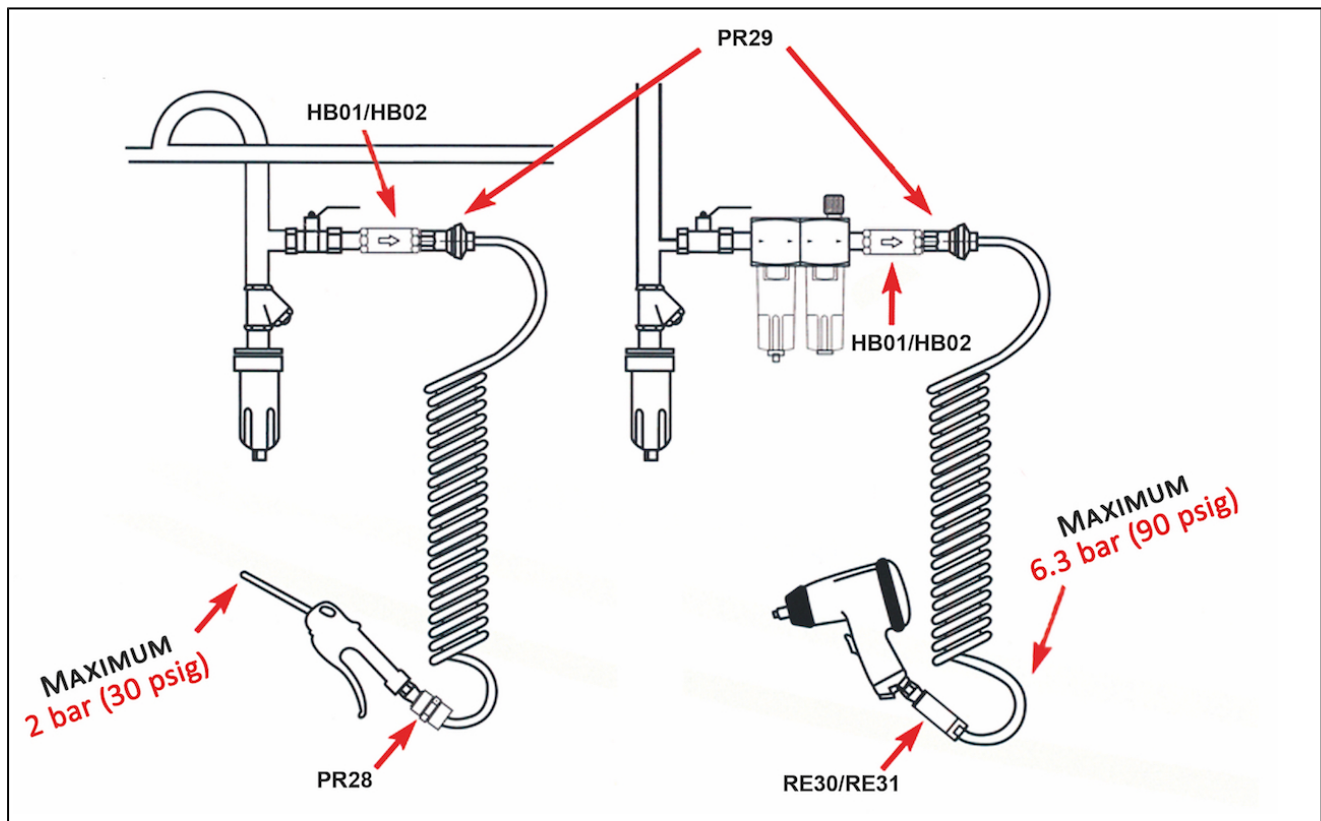

illustrations are for information only and are non-binding
all designs, configurations, measurements and materials are subject to change without prior notice