


**on-off valve 3/4"**  
**type V3-34**




|                     |                                                             |
|---------------------|-------------------------------------------------------------|
| design              | on-off valve, 3/2-way, lockable, with exhaust               |
| connection          | G3/4" according to ISO228/1                                 |
| exhaust port        | G1/4" according to ISO228/1                                 |
| materials           | body acetal resin (POM), thread connections brass CuZn40Pb2 |
| function            | to switch off the supply pressure and exhaust the system    |
| type of fixing      | installation in a pipe system or wall bracket               |
| mounting position   | any                                                         |
| medium              | filtered and lubricated or non lubricated compressed air    |
| medium temperature  | +5°C to +50°C                                               |
| ambient temperature | +5°C to +50°C                                               |
| inlet pressure      | max. 12,5 bar                                               |
| flow direction      | is marked by an arrow                                       |
| scope of supply     | including locking device                                    |
| accessories         | silencer 2941-1/4"                                          |

## dimensions

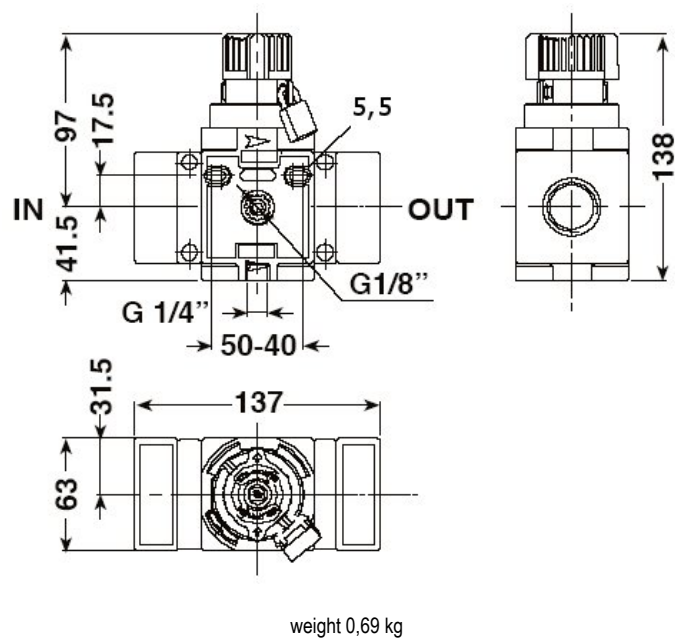

## flow diagram

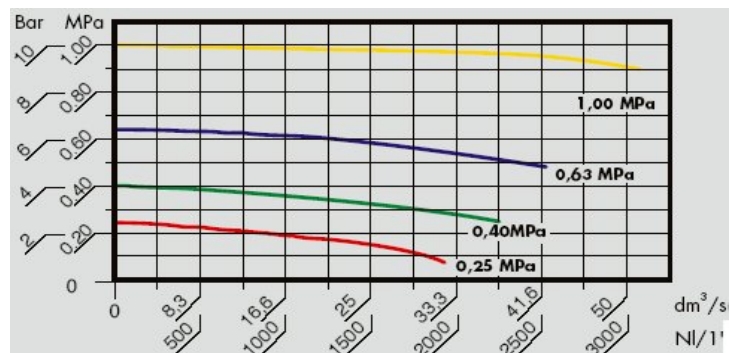

inlet pressure = 10bar, flow rate at standard conditions

illustrations are for information only and are non-binding  
all designs, configurations, measurements and materials are subject to change without prior notice