



## Soft-start valve 1/2" Type AVP-12-APC



|                     |                                                                                                                                                                                              |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Design type         | Soft-start valve, adjustable                                                                                                                                                                 |
| Connection          | G1/2" according to ISO228/1                                                                                                                                                                  |
| Materials           | Housing Acetal resin (POM), Threaded connections Brass CuZn40Pb2                                                                                                                             |
| Function            | the pressure on the secondary side is built up slowly until reaching approx. 60% of the inlet pressure and then switches through. The response time for the pressure build-up is adjustable. |
| Mounting type       | Installation in piping system or Wall mounting                                                                                                                                               |
| Mounting position   | any                                                                                                                                                                                          |
| Medium              | filtered and lubricated or unlubricated compressed air                                                                                                                                       |
| Medium temperature  | +5°C up to +50°C                                                                                                                                                                             |
| Ambient temperature | +5°C up to +50°C                                                                                                                                                                             |
| Inlet pressure      | 3 bar up to 10 bar                                                                                                                                                                           |
| Flow direction      | is marked by an arrow                                                                                                                                                                        |


### Dimensions

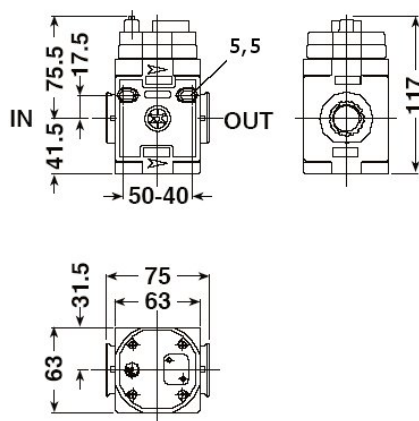

Weight 0,41 kg



## Flow diagram

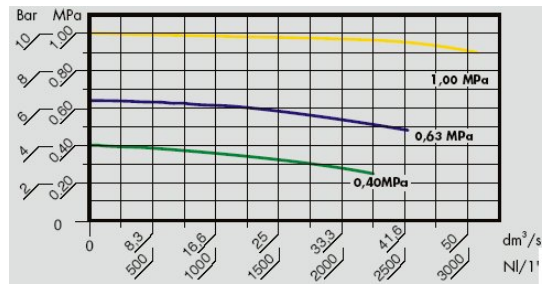

Inlet pressure = 10bar, Flow rate at standard conditions

Illustrations non-binding

Design, dimensional and material changes reserved

Pneumatics / Regulators, filters and lubricators / Maintenance devices - series FRL / Soft start valve Series AVP / [AVP-12-APC] Soft start valve AVP-12-APC

