



Soft-start valve 3/4" Type AVP-34-APC




Design type	Soft-start valve, adjustable
Connection	G3/4" according to ISO228/1
Materials	Housing Acetal resin (POM), Threaded connections Brass CuZn40Pb2
Function	the pressure on the secondary side is built up slowly until reaching approx. 60% of the inlet pressure and then switches through. The response time for the pressure build-up is adjustable.
Mounting type	Installation in piping system or Wall mounting
Mounting position	any
Medium	filtered and lubricated or unlubricated compressed air
Medium temperature	+5°C up to +50°C
Ambient temperature	+5°C up to +50°C
Inlet pressure	3 bar up to 10 bar
Flow direction	is marked by an arrow

Dimensions

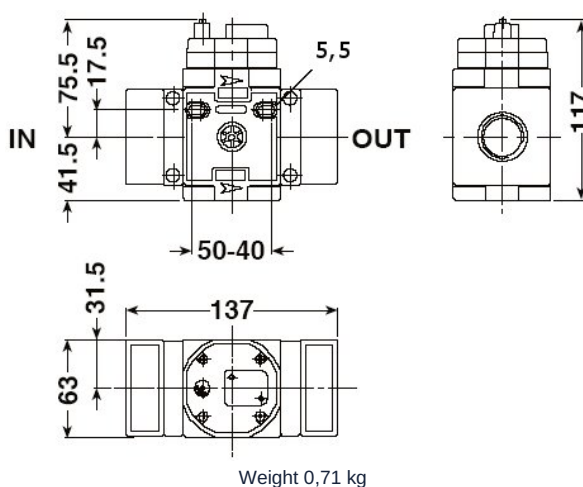

Flow diagram

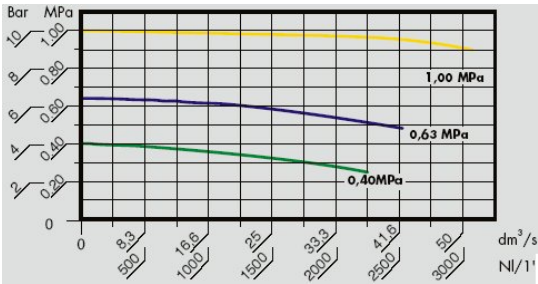

Inlet pressure = 10bar, Flow rate at standard conditions

Illustrations non-binding
Design, dimensional and material changes reserved