


Manifold Series Modul MDI03



Design type	Cross manifold
Connection	G1/4", G3/8", G1/2" and G3/4" according to ISO228/1
Materials	Housing Zinc die casting, Seals NBR
Mounting type	Installation in piping system or Wall mounting using mounting bracket
Mounting position	any
Medium	filtered compressed air
Medium temperature	0...+60°C, (with appropriately conditioned compressed air -20...+60°C)
Ambient temperature	-20...+60°C
Inlet pressure	maximum 16bar
Flow direction	any

Dimensional drawing for connection G1/4" and G3/8"

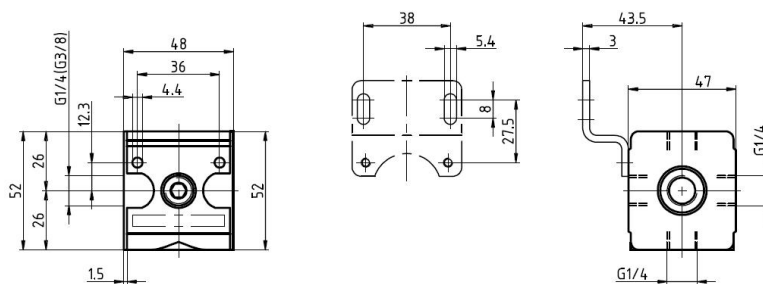

Connection	Outlets	Flow rate at 6 bar [Nl/min]	DN [mm]	Type
G1/4"	4 x 1/4"	2500	6	MDI03-14
G3/8"	4 x 1/4"	2500	10	MDI03-38

*Flow rate at inlet pressure 6 bar and 1 bar pressure drop



Dimensional drawing for connection G1/2" and G3/4"



Connection	Outlets	Flow rate at 6 bar [Nl/min]	DN [mm]	Type
G1/2"	2 x 1/4", 2 x 1/2"	11000	15	MDI03-12
G3/4"	2 x 1/4", 2 x 1/2"	11000	20	MDI03-34

*Flow rate at inlet pressure 6 bar and 1 bar pressure drop

Accessories

Connection	Designation	Type
G1/4" and G3/8"	Holding angle (complete)	MMB03-14H/38
G1/2" and G3/4"	Holding angle (complete)	MMB03-12/34

Illustrations non-binding

Design, dimensional and material changes reserved

Pneumatics / Regulators, filters and lubricators / Maintenance devices - series Modul / T-distributor Series Modul MDI03 / [MDI03-38] T-distributor MDI03-38

Version 5

139389 / Generated 2026/29 EN

MADE IN EUROPE

+43 512 52076

austria@stasto.eu

© STASTO Automation KG

www.stasto.com

Open series online

Page 2 / 2

