




Manifold G3/4" Series Modul MDI03



Design type	Cross manifold
Connection	G3/4" according to ISO228/1
Materials	Housing Zinc die casting, Seals NBR
Mounting type	Installation in piping system or Wall mounting using mounting bracket
Mounting position	any
Medium	filtered compressed air
Medium temperature	0...+60°C, (with appropriately conditioned compressed air -10...+60°C)
Ambient temperature	-10...+60°C
Inlet pressure	maximum 16bar
Flow direction	any

Dimensional drawing

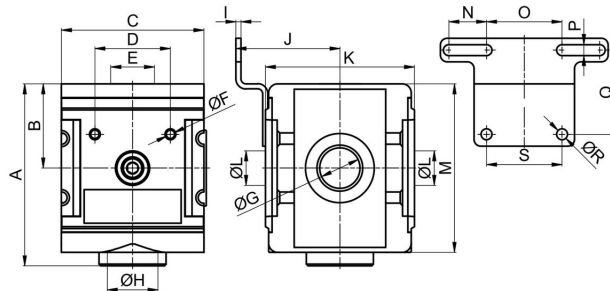

Connection G	DN [mm]	A	B	C	D	E (2.2)	F	H (2.1)	I	J	K	L (2.3-2.4)	M	N	O	P	Q	R	S
G3/4"	20	108	50	85	45	G3/4"	M6	G1"	3	62	89	G1/4"	100	22,5	45	6,5	50	6,5	45

Connection G	Flow rate at 6 bar* [Nl/min]					max. Inlet pressure [bar]	Weight [approx. kg]	Type
	1 → 2	1 → 2.1	1 → 2.2	1 → 2.3	1 → 2.4			
G3/4"	18000	12000	8500	2600	2600	16	1,4	MDI03-34H

*Flow rate at inlet pressure 6 bar and 1 bar pressure drop



Accessories

Designation	Type
Holding angle with two screws	MMB03-34H/10

Illustrations non-binding
Design, dimensional and material changes reserved