


Shut-off valve G3/4" Series Modul MBA03



Design type	3/2-way valve, lockable, with Exhaust air venting
Connection	G3/4" according to ISO228/1
Materials	Housing Zinc die casting, Seals NBR
Function	for shutting off the supply pressure and venting the system
Mounting type	Installation in piping system or Wall mounting using mounting bracket
Mounting position	any
Medium	filtered compressed air
Medium temperature	0...60°C (with appropriately conditioned compressed air -10...60°C)
Ambient temperature	-10...+60°C
Inlet pressure	maximum 16bar
Flow direction	is marked by an arrow
Actuation	Toggle 90° rotatable
Scope of delivery	including Shut-off lock



Dimensional drawing

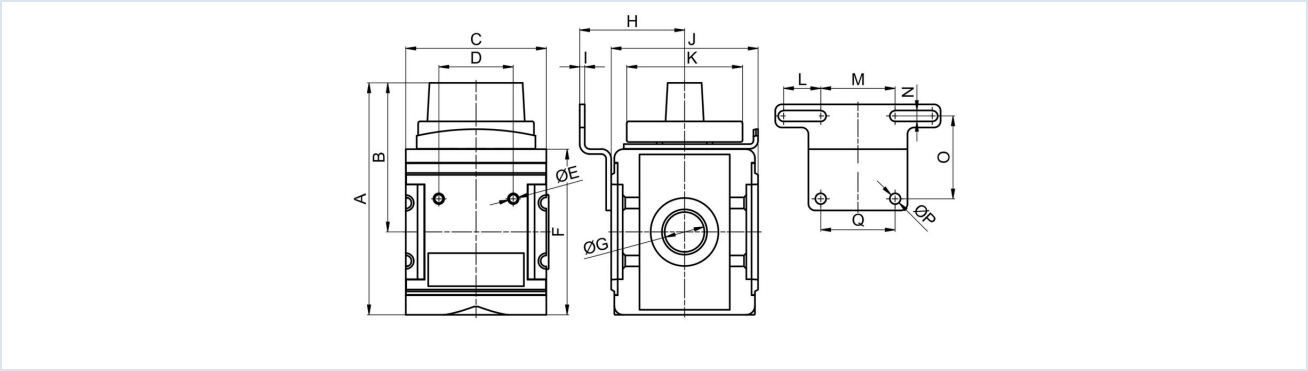


Connection G	A	B	C	D	E	F	H	I	J	K	L	M	N	O	P	Q
G3/4"	140	90	85	45	M6	100	63,5	3	89	70	22,5	45	6,5	50	6,5	45

Connection	Exhaust port	Flow rate at 6 bar* [Nl/min]	DN [mm]	Weight [kg]	Type
G3/4"	G1/2"	25000	20	1,7	MBA03-34H-VS36

*Flow rate at inlet pressure of 6 bar and 1 bar pressure drop

Flow diagram

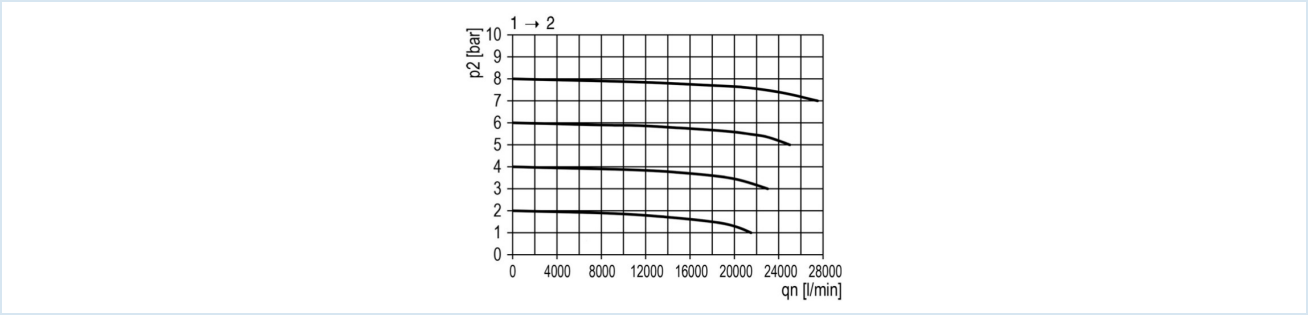

Accessories

Designation	Type
Holding angle with two screws	MMB03-34H/10

Illustrations non-binding
Design, dimensional and material changes reserved