


Soft-start valve G1/4" and G1/2" Series Modul MSS03



Design type	Soft-start valve, adjustable
Connection	G1/4" and G1/2" according to ISO228/1
Materials	Housing Zinc die casting, Seals NBR
Function	the pressure on the secondary side is built up slowly until reaching approx. 50% of the inlet pressure and then switches through. The response time for the pressure build-up is adjustable.
Mounting type	Installation in piping system or Wall mounting using mounting bracket
Mounting position	any
Medium	filtered compressed air
Medium temperature	0...60°C, (with appropriately conditioned compressed air -20...+60°C)
Ambient temperature	-20...+60°C
Inlet pressure	2...16bar


Dimensional drawing for connection G1/4"

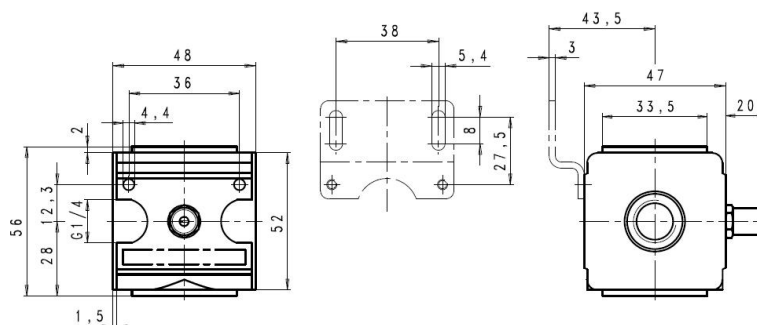

Connection	Flow rate at 6 bar [Nl/min]	Type
G1/4"	1000	MSS0314H



Dimensional drawing for connection G1/2"

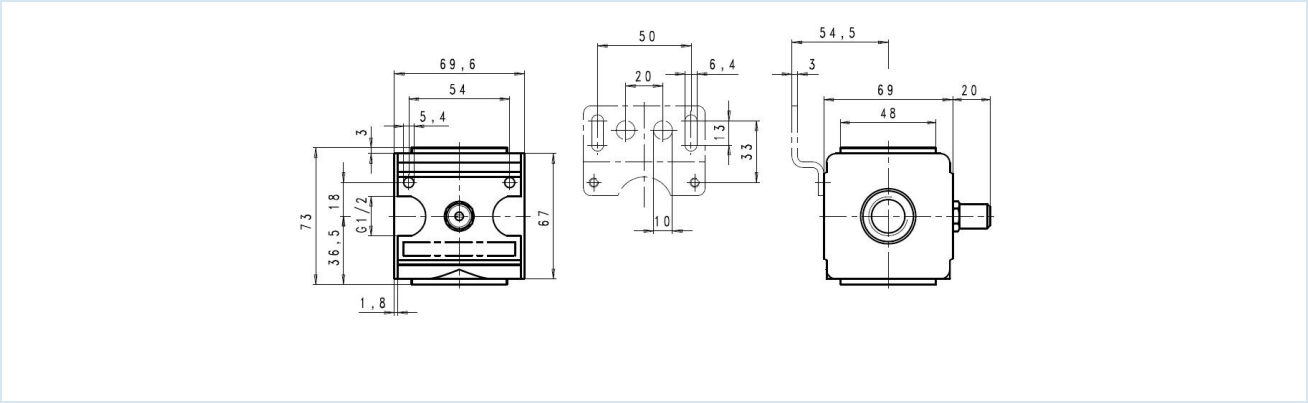

Connection	Flow rate at 6 bar [Nl/min]	Type
G1/2"	4000	MSS03-12

Accessories

Connection	Designation	Type
G1/4"	Holding angle (complete)	MMB03-14H/38
G1/2"	Holding angle (complete)	MMB03-12/34

Illustrations non-binding
Design, dimensional and material changes reserved