


Filter regulator 3/4" Series FR




Design type	Diaphragm pressure regulator with secondary exhaust air release and Filter with plastic filter element
Connection	G3/4" according to ISO228/1
Materials	Housing Acetal resin (POM), Threaded connections Brass, Condensate reservoir Polyamide, Protective cage PE, Seals NBR, Spring cap POM
Function	Control of secondary pressure plus filtration of compressed air
Mounting type	Installation in piping system, Locknut or Wall mounting using mounting bracket
Mounting position	vertical, Condensate container downward
Medium	Compressed air
Medium temperature	+5...+50°C
Ambient temperature	+5...+50°C
Inlet pressure	max. 12,5bar, 1,5...10bar with automatic drain valve K-SA
Control ranges	see "Order code"
Flow direction	is marked by an arrow
Locking mechanism	the pressure setting can be locked by pressing in the rotary knob
Condensate drain valve	manual or semi-automatic
Volume Condensate container	140cm ³
Scope of delivery	including Pressure gauge Ø40mm and Locknut



Order code

FR - 34 - 20 - 08 - R - PE - SS									
Connection	3/4"	34							
Filter element	20µm	20							
	5µm	5							
Pressure range	0,5...4bar	04							
	0,5...8bar	08							
	0,5...12bar	12							
Secondary exhaust venting	with secondary exhaust air release							R	
Reservoir	Plastic bowl with protective guard							PE	
Drain valve	Manual drain valve								SS
	automatic drain valve								SA


Dimensions

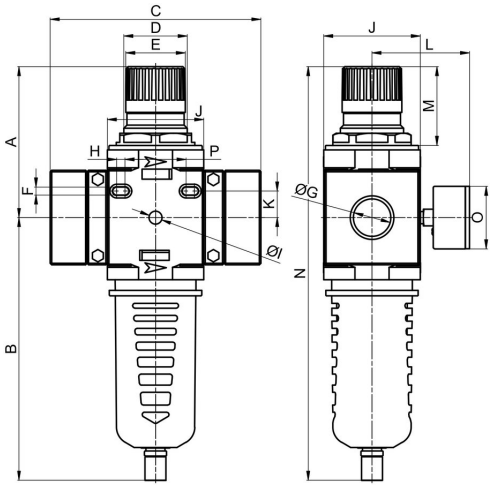

Weight 0,88kg


Connection G	A	B	C	D	E	F	H	I	J	K	L	M	N	O	P	Q	Type
G3/4"	99	172,5	138	M42x2	39	5,5	5,5	G1/8"	63	17,5	~64	52	271,5	40	50	40	FR-34-20-08-R-PE-SS

Flow diagram

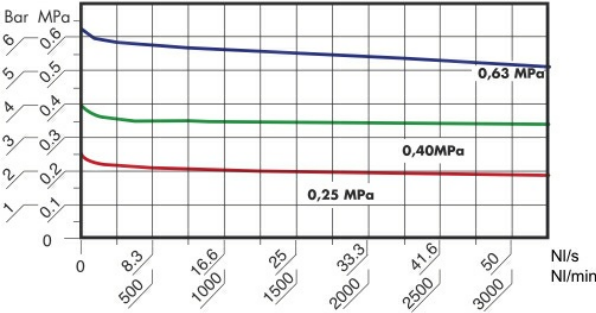


Inlet pressure = 10bar

Control characteristic

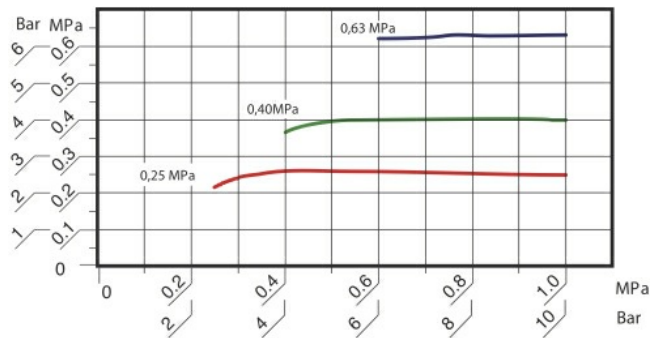

Flow rate constant = 900Nl/min
horizontal axis: Inlet pressure
vertical axis: Outlet pressure

Accessories

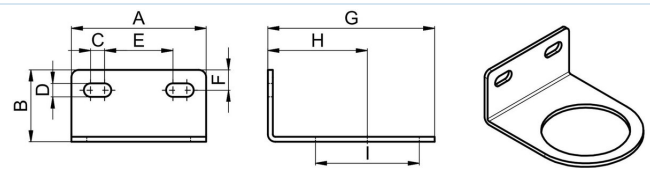

A	B	C	D	E	F	G	H	I	Type
54,5	29	6	5,5	27,5	8	67,5	40	42	K-BRL

Illustrations non-binding
Design, dimensional and material changes reserved