



hand pumps series PAM-T and PAM-TD

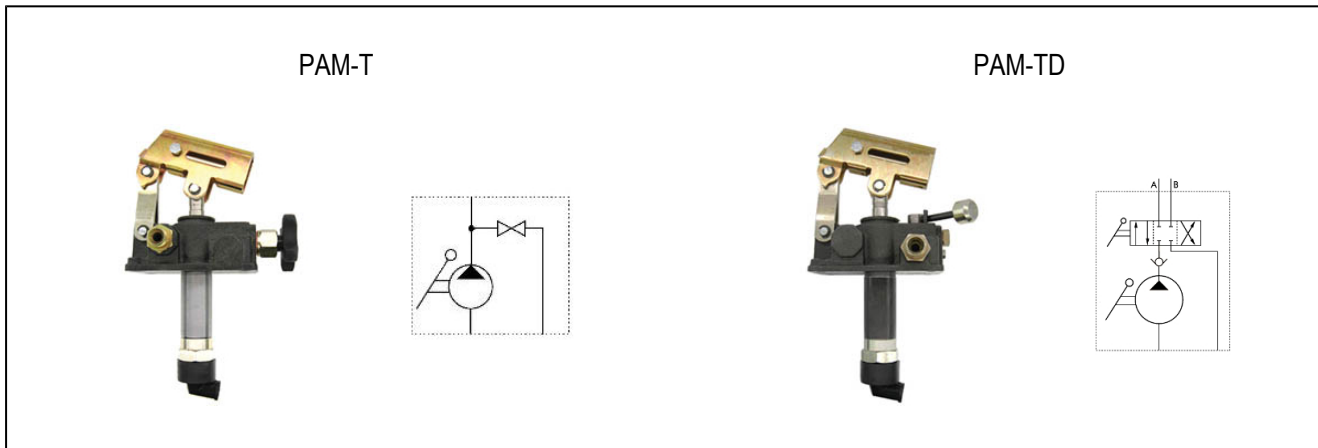

design	provided for mounting at the tank series PM, single acting with drain valve or double acting with 4/3-way-valve, oil conveying at pulling and pushing the hand lever
seals	NBR
viscosity	12...100 cSt
temperature range	-15...+80°C
special version	with bellow and relief valve on request
scope of supply	material for assembling and seals, without hand lever
suitable hand lever	PAM0290000


dimensions

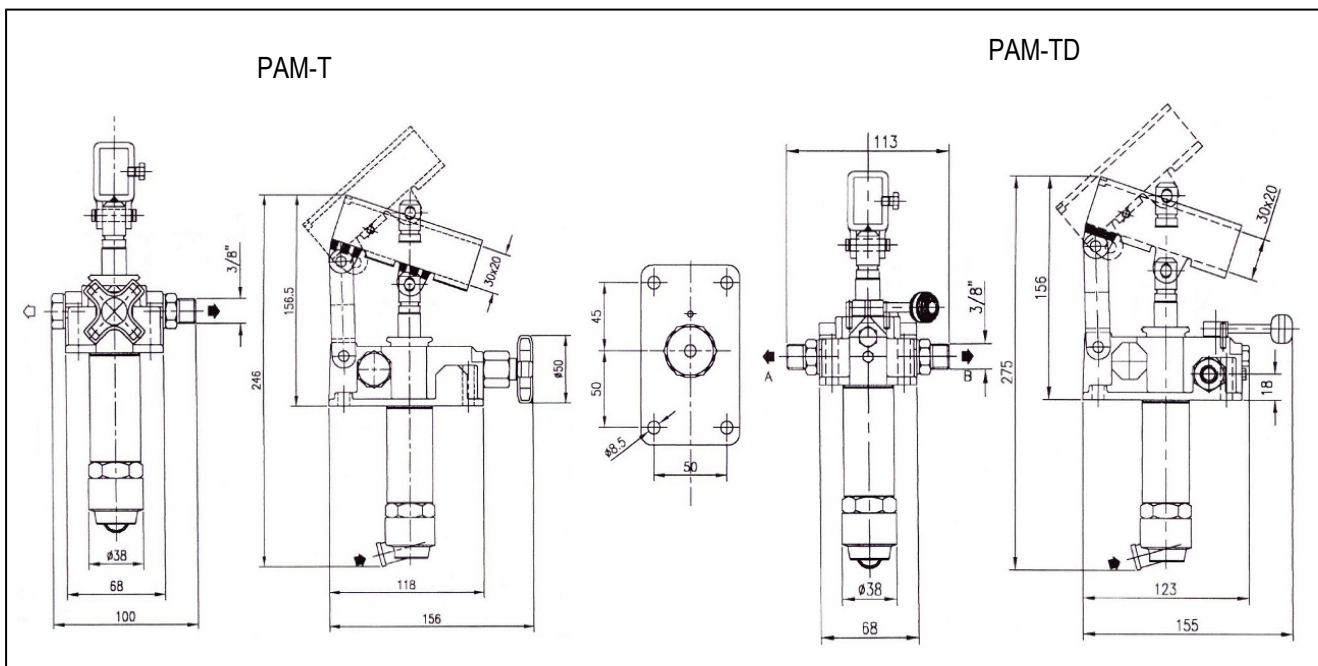


displacement [cm ³ /stroke]	max. operating pressure [bar]	weight [kg]	type
12	380	2,85	PAM-T.-12
25	350	2,95	PAM-T.-25
45	280	3,15	PAM-T.-45

oil tanks


1 litre tank

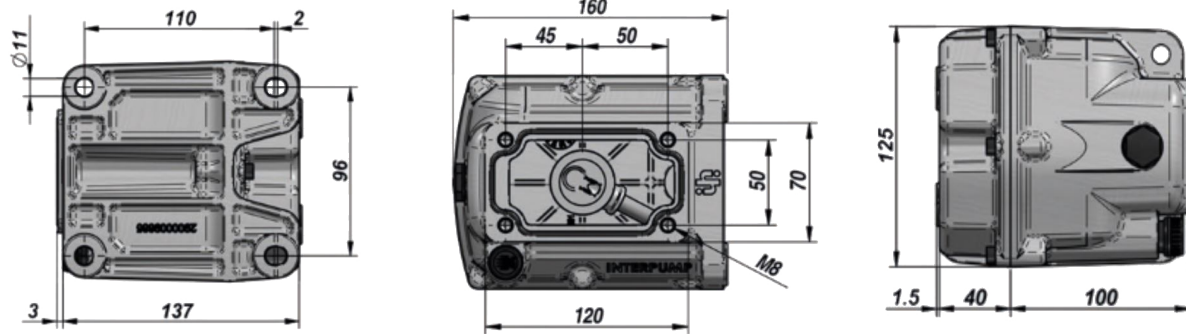

2, 3 and 5 litre tank

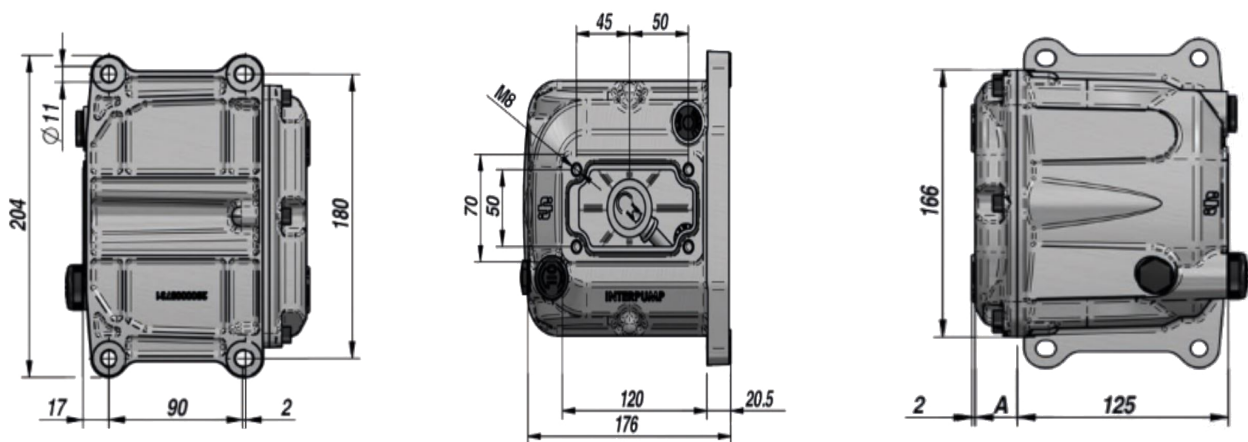

7 and 10 litre tank

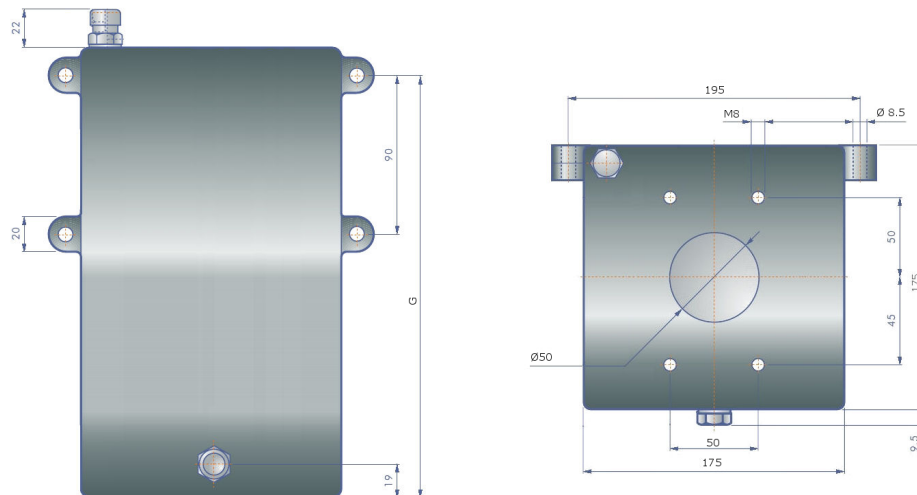

tank capacity [l]	A	G	material	weight [kg]	type
1	40	-	aluminum	1,5	PAMSAL0100
2	25	-	aluminum	1,5	PAMSAL0200
3	70	-	aluminum	1,6	PAMSAL0300
5	180	-	aluminum	1,8	PAMSAL0500
7	-	269	steel/black-lacquered	5,4	PM00220007
10	-	376	steel/black-lacquered	6,8	PM00220010

illustrations are for information only and are non-binding
all designs, configurations, measurements and materials are subject to change without prior notice