


pressure regulator series R364/R374

Description	Compact regulator with diaphragm.
Media	compressed air, non-corrosive gases or liquids
Supply pressure	max. 21 bar
Adjustment	by plastic knob with snap-lock
Relieving function	relieving, optionally non-relieving
Gauge port	G $\frac{1}{8}$ on both sides of the body, screw plugs supplied
Mounting position	any
Temperature range	0 °C to 50 °C / 32 °F to 122 °F, for appropriately conditioned compressed air down to -30 °C / -22 °F 0 °C to 80 °C / 32 °F to 176 °F, for spring cage made of brass
Material	Body: brass at R364, aluminium at R374 Spring cage: glass fibre reinforced plastic, optionally brass Elastomer: NBR/Buna-N, optionally FKM Inner valve: brass, optionally stainless steel



**G $\frac{1}{8}$ and G $\frac{1}{4}$
compressed air or liquids**

Dimensions			Flow rate		Connection thread	Pressure range	Order number
A	B	C	m ³ /h*	l/min*	G	bar	
mm	mm	mm					

Brass pressure regulator

supply pressure max. 21 bar,
relieving

R364

35	76	12	27	450	G $\frac{1}{8}$	0.1 ... 1.0	R364-010
						0.2 ... 1.8	R364-01A
						0.2 ... 4.0	R364-01B
						0.3 ... 9.0	R364-01C
						0.5 ... 11	R364-01D
35	76	12	27	450	G $\frac{1}{4}$	0.1 ... 1.0	R364-020
						0.2 ... 1.8	R364-02A
						0.2 ... 4.0	R364-02B
						0.3 ... 9.0	R364-02C
						0.5 ... 11	R364-02D



R364
made of brass

Aluminium pressure regulator

supply pressure max. 21 bar,
relieving

R374

35	76	12	27	450	G $\frac{1}{8}$	0.1 ... 1.0	R374-010
						0.2 ... 1.8	R374-01A
						0.2 ... 4.0	R374-01B
						0.3 ... 9.0	R374-01C
						0.5 ... 11	R374-01D
35	76	12	27	450	G $\frac{1}{4}$	0.1 ... 1.0	R374-020
						0.2 ... 1.8	R374-02A
						0.2 ... 4.0	R374-02B
						0.3 ... 9.0	R374-02C
						0.5 ... 11	R374-02D




R374
made of aluminium

Special options, add the appropriate letter


NPT	connection thread	R3.4-0...N
non-relieving	without relieving function	R3.4-0...K
adjustment lock	socket wrench adjustment, height 64 mm	R3.4-0...T
free of grease and oil	specialty cleaned, suitable for oxygen	R3.4-0...L
FKM elastomer	inner parts made of brass	R3.4-0...X64
	inner parts made of brass	R3.4-0...X08
EPDM elastomer	inner parts m. o. brass, PTFE-diaphragm, W270, KTW, DVGW approval	R364-01...X37
brass spring cage	including brass adjusting screw, max. 80 °C / 176 °F	R3.4-0...X82

Accessories


pressure gauge	Ø 40 mm, 0... ^{*2} bar, G $\frac{1}{8}$	MA4001-...^{*2}
mounting bracket	made of steel	BW30-02
mounting nut	made of plastic	M30x1,5K
	made of aluminium	M30x1,5A



R364 / R374



cross-section




BW30-02

*1 at 8 bar supply pressure, 6 bar outlet pressure and 1 bar pressure drop
*2 01 = 0...1 bar, 02 = 0...2.5 bar, 04 = 0...4 bar, 10 = 0...10 bar, 16 = 0...16 bar



R364-02CT with adjustment lock
R364-02CX82 brass throughout

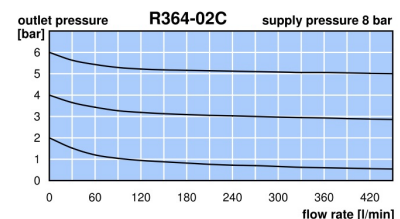

illustrations are non-binding
all designs, configurations, measurements and materials are subject to change without prior notice