




3/2-way spool valve series K32P1614OF



K32P161. (NC)

design	3/2-way spool valve, actuation pneumatic/spring respectively pneumatic/pneumatic, free of oil and grease
connection	G1/4" according to ISO228/1
materials	body nickel-plated aluminum, spool aluminum, seals NBR
type of fixing	through-holes in the valve body
mounting position	any
medium	oxygen
medium temperature	0...+40°C
ambient temperature	-10...+50°C


K32P1614OF actuation pneumatic/spring

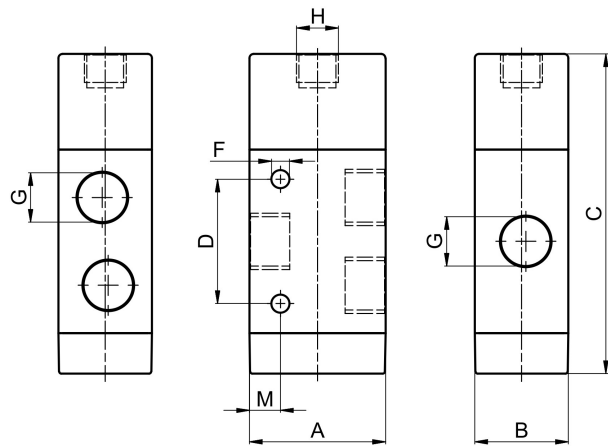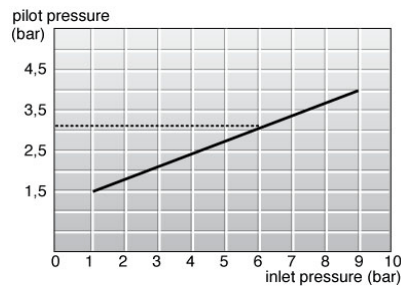

connection G	nominal diameter DN [mm]	pressure range [bar]	A	B	C	D	F	H	M	flow rate* [Nl/min]	function	type
G1/4"	8	3,1...9	32	22	75,3	29,3	4,2	G1/8"	7,3	1300	NC	K32P1614OF

*compressed air, reference pressure 6bar, reference temperature 20°C

flow diagram compressed air

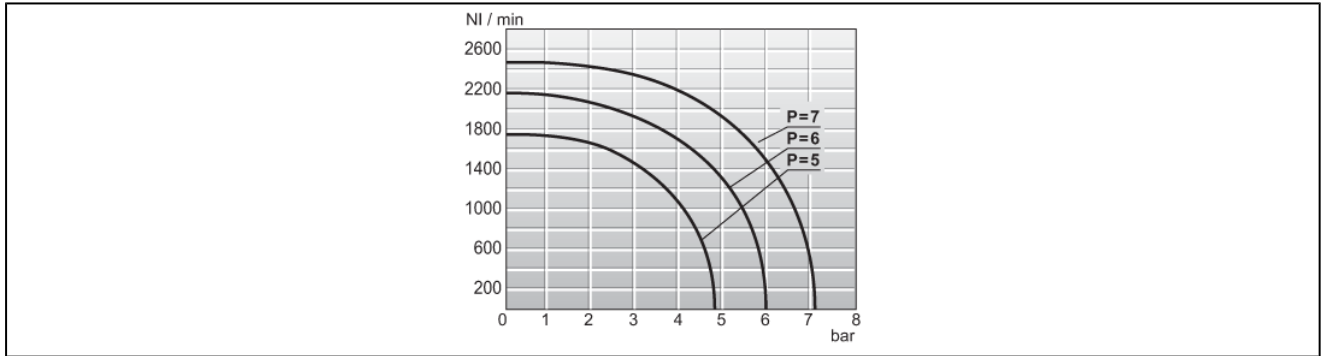

illustrations are non-binding
all designs, configurations, measurements and materials are subject to change without prior notice