


ball valves made of brass, mini type series BA195




design	two way ball valve with floating ball
connection	G1/4"...G1/2" according to ISO228/1
materials	CW617N chromium plated brass body , ball brass CW614N hard chrome plated, ball seal PTFE, stem seal FKM, polyamide turning handle
type of fixing	installed into rigid pipework
mounting position	any
application	gases and liquids of group 2 according to PED 2014/68/EU, which do not affect the used materials.
medium temperature	-10...+150°C
operating pressure	nominal pressure according to table and pressure-temperature diagram
actuation	with 90° turn of the handle

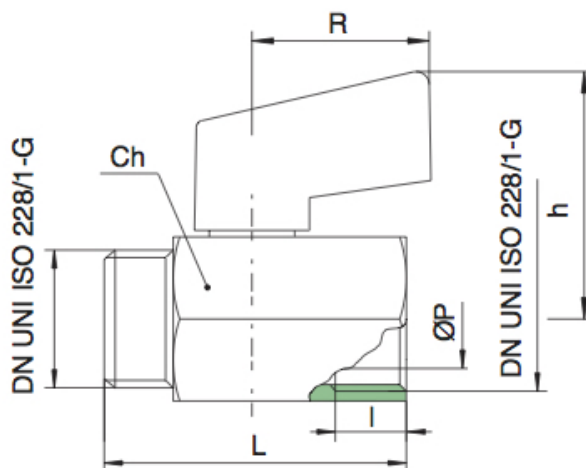

connection	PN [bar]	Ch	h	I	L	R	P	kv value [m ³ /h]	weight [app. kg]	type
G1/4"	10	21	36,5	10	41	27	8	4,3	0,10	BA195-14-L
G3/8"	10	21	36,5	10	41	27	8	2,7	0,09	BA195-38-L
G1/2"	10	25	37,7	11	46	27	10	5,4	0,14	BA195-12-L

pressure-temperature-diagram

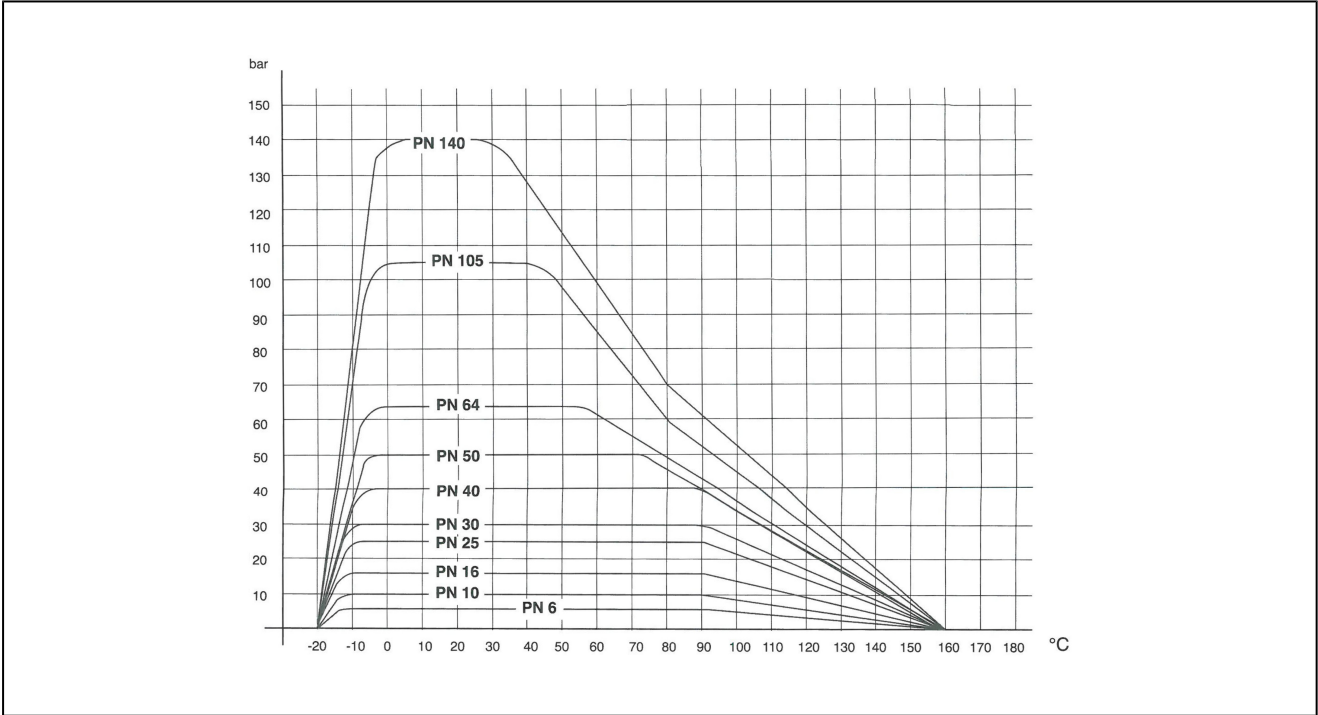

illustrations are non-binding
all designs, configurations, measurements and materials are subject to change without prior notice