

globe valve made of cast iron series GL119




design	shut-off valve in through-flow design with back-seal and packing gland, metal sealing, rising stem, painted body RAL5013, coating 40µm
actuation	by means of a steel hand wheel
connection	flange DN15...DN250 according to EN1092-2 PN16
length	according to DIN EN558-1R1
materials	body cast iron EN-JL1040, seat, cone and stem stainless steel AISI 420, handwheel steel, packing graphite
application	group 1 and 2 liquids and gases acc. to PED 2014/68/EU and which do not affect the used materials.
medium temperature	-10...+300°C
operating pressure	nominal pressure according to pressure-temperature table
type of fixing	installed into rigid pipework
mounting position	any
approvals	ATEX on request
special versions	control cone, cone with soft sealing

pressure temperature chart in bar

-10...+120°C	150°C	200°C	250°C	300°C
16	14,4	12,8	11,2	9,6

interim values of max. operating pressure can be calculated by linear interpolation of nearest lower and higher temperatures.

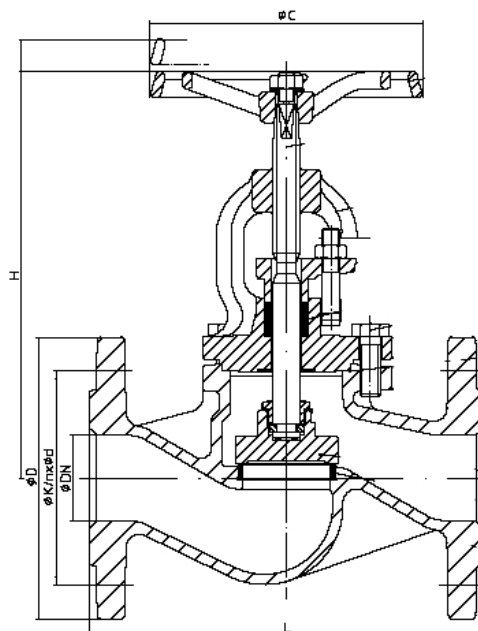

nominal diameter DN[mm]	PN [bar]	C	D	H*	K	L	nxd	kv value [m ³ /h]	weight [app. kg]	type
15	16	100	95	226	65	130	4 x Ø14	4,6	3,5	GL119-15-W
20	16	100	105	226	75	150	4 x Ø14	7,3	4,5	GL119-20-W
25	16	100	115	232	85	160	4 x Ø14	11,7	5	GL119-25-W
32	16	125	140	233	100	180	4 x Ø18	16,8	6,5	GL119-32-W
40	16	150	150	270	110	200	4 x Ø18	26,7	9,5	GL119-40-W
50	16	150	165	273	125	230	4 x Ø18	42,6	12	GL119-50-W
65	16	200	185	356	145	290	4 x Ø18	77,9	19,5	GL119-65-W
80	16	200	200	360	160	310	8 x Ø18	111	22,5	GL119-80-W
100	16	225	220	405	180	350	8 x Ø18	177	33,5	GL119-100-W
125	16	250	250	450	210	400	8 x Ø18	262	45,5	GL119-125-W
150	16	350	285	510	240	480	8 x Ø22	368	66	GL119-150-W
200	16	400	340	680	295	600	12 x Ø22	664	116	GL119-200-W
250	16	500	405	820	355	730	12 x Ø26	1044	170	GL119-250-W

* height in open position

Kv value depending on the valve opening for control cone [m³/h]

nominal diameter DN [mm]	15	20	25	32	40	50	65	80	100	125	150	200
20%	0,33	0,84	1,30	2,20	3,72	8,26	8,9	16,1	21,1	35,9	51,1	72
40%	0,99	1,77	2,81	4,53	7,24	14,20	18,0	30,9	40,4	60,9	109	143
60%	2,17	3,52	4,91	8,30	13,50	22,20	34,2	55,2	74,6	103	190	258
80%	3,27	5,47	7,64	12,50	19,80	30,80	53,8	80,4	117	154	252	377
100%	4,19	6,77	9,22	15,40	24,50	36,50	64,1	91,7	138	182	286	446

illustrations are non-binding
all designs, configurations, measurements and materials are subject to change without prior notice