


Kugelhähne aus Edelstahl Serie BA184




Stainless steel, 2-piece - standard type.

Housing	Stainless steel 1.4408
Ball	Stainless steel 1.4401
Ball seal	PTFE (15 % glass fibre reinforced)
Stem seal	PTFE
Hand lever	Stainless steel 1.4301, with plastic coating
Operating temperature	-20 °C to 180 °C
Standard thread	G thread acc. to DIN EN ISO 228-1

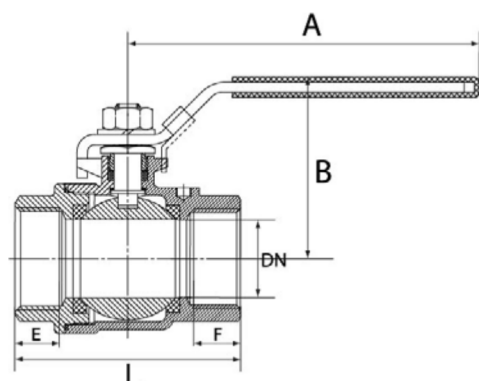

Stainless steel ball valve, 2-piece, female/female thread, with full bore

Thread	DN	PN bar	L mm	A mm	B mm	E mm	F mm	Kv
G 1/4	11.6	63	50.0	94.0	44.0	10.0	10.0	6.6
G 3/8	12.5	63	50.0	94.0	44.0	11.0	11.0	7.9
G 1/2	15	63	58.0	104.0	50.0	12.0	12.0	11.2
G 3/4	20	63	65.0	113.0	59.0	13.0	13.0	21
G 1	25	63	80.0	128.0	65.0	15.0	15.0	35
G 1 1/4	32	63	92.0	156.0	79.0	17.0	17.0	57
G 1 1/2	38	63	105.0	156.0	83.0	17.0	17.0	80
G 2	50	63	125.0	194.0	99.0	23.0	23.0	150
G 2 1/2	64	40	155.0	246.0	125.0	27.0	27.0	265
G 3	76	40	183.0	246.0	130.0	31.0	31.0	415

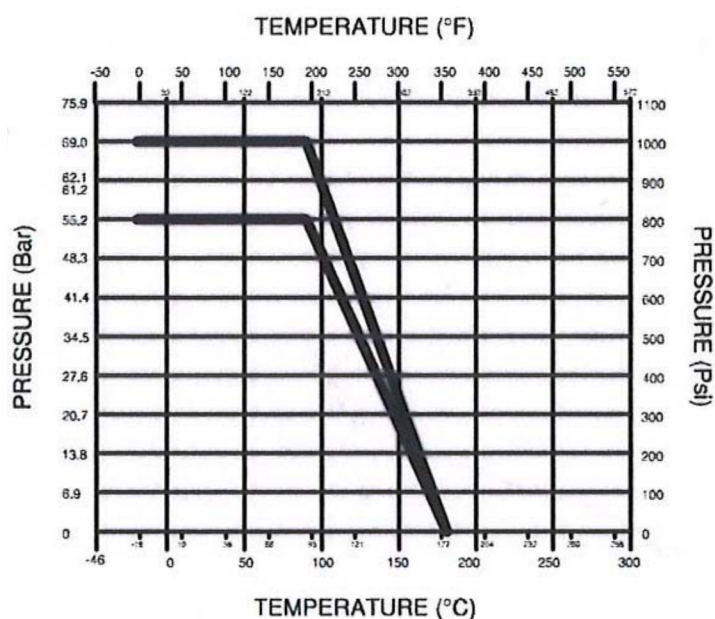

Abbildungen unverbindlich, Konstruktions-, Maß- und Werkstoffänderungen vorbehalten
illustrations are non-binding, all designs, configurations, measurements and materials are subject to change without prior notice