


pressure tank series B



design	buffer tank according to 2014/68 EU
connection	G1/2" according to ISO228/1
materials	body steel epoxy coated
medium temperature	-10...+60°C
type of fixing	installed into rigid pipework
mounting position	any
buffer media	compressed air, argon, other media on request
application	only as buffer tank in a way that the tank is connected directly to the compressor. otherwise a safety valve has to be mounted.
permissible operating pressure	max. 11bar

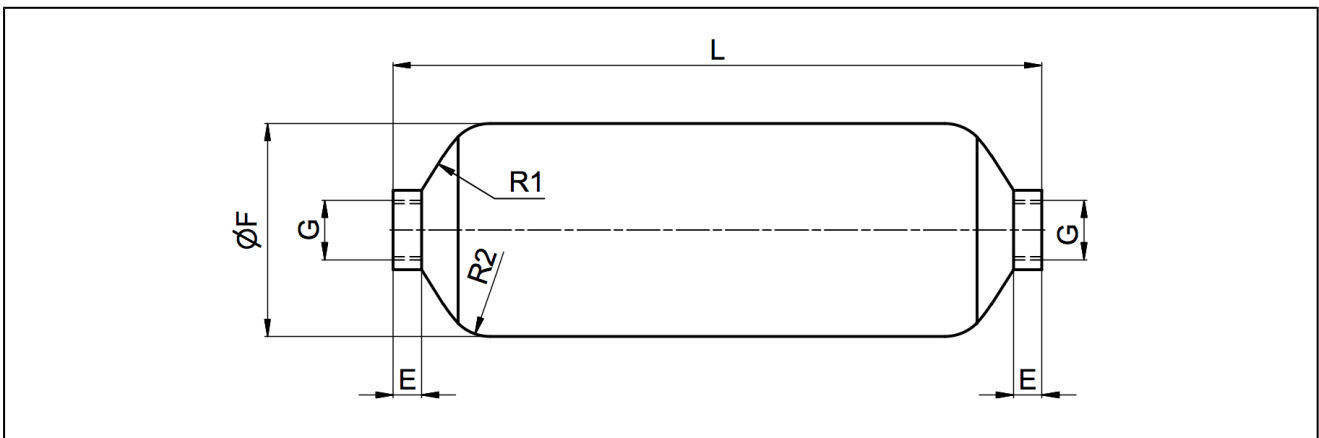

content [litre]	connection G	E	Ø F	L	R1	R2	weight [app. kg]	type
1	G1/2"	10	85	225	68	16	0,9	B940
2,5	G1/2"	10	160	170	153	36	1,2	B941
5	G1/2"	4	210	184	210	40	2,3	B942
7	G1/2"	5	210	240	195	38	2,8	B943
12	G1/2"	4	229	365	200	54	4,5	B944

illustrations are non-binding
all designs, configurations, measurements and materials are subject to change without prior notice