



Serie INOX-VAL MONOBLOCCO

Articolo BA104

Barstock ball valve monobloc type class 800 lbs in stainless steel AISI316 and carbon steel ASTM A105, full bore, F/F threading NPT, antistatic device.

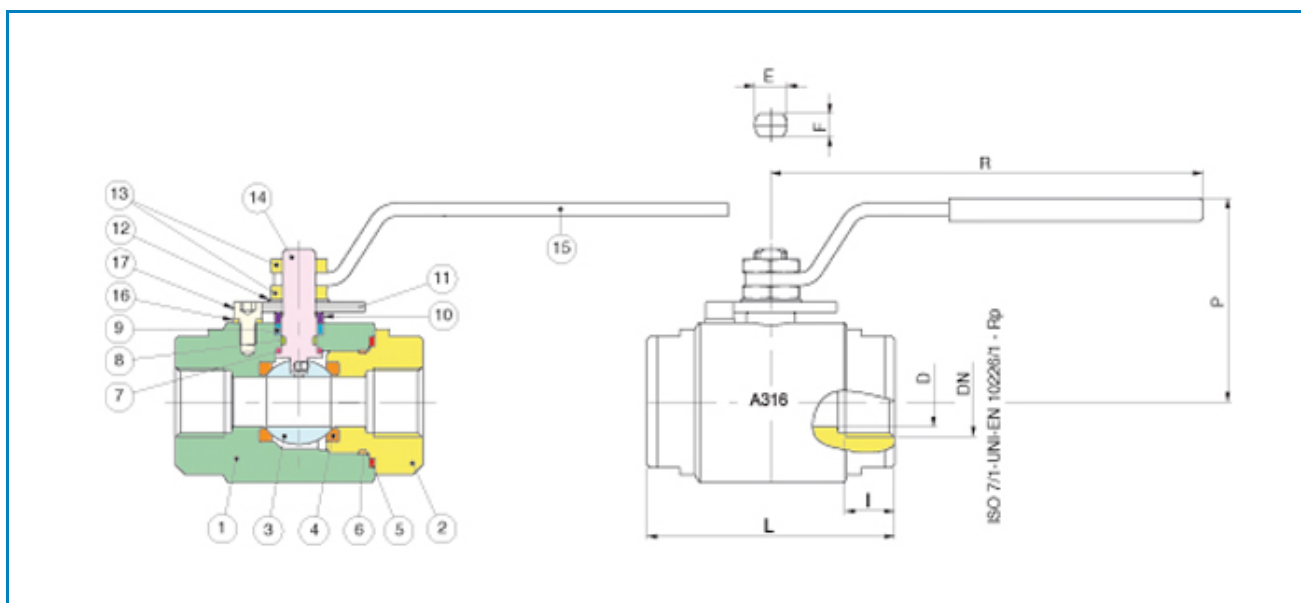

Limiti di temperatura: -10° +160° - Temperature range: -10° +160° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	ASTM-A105	1
2	END CONNECTION	ASTM-A105	1
3	BALL	A182-F316	1
4	BALL SEAT	P.T.F.E.+fiberglass	2
5	BODY SEAT	P.T.F.E.+carbografito	1
6	O-RING	FKM (VITON®)	1
7	THRUST WASHER	P.T.F.E.+carbografito	1
8	O-RING	FKM (VITON®)	1
9	STEM SEAT	P.T.F.E.+carbografito	1
10	BUSH	A182-F316	1
11	90° STOP	CARBON STEEL	1
12	SPRING WASHER	CARBON STEEL	2
13	NUT	CARBON STEEL	2
14	STEM	A182-F316	1
15	HANDLE	CARBON STEEL	1
16	WASHER	STAINLESS STEEL	1
17	SCREW	STAINLESS STEEL	1

MISURA SIZE	DN	D	I	L	R	P	E	F	Kv	Kg
1/4"NPT	8	8	11	65	131	54	M8	5	5,5	0,70
3/8"NPT	10	8	11,4	65	131	54	M8	5	5,5	0,67
1/2"NPT	15	15	15	75	174	65	M10	7	19,2	0,96
3/4"NPT	20	20	16,3	90	174	69	M10	7	35,0	1,55
1"NPT	25	25	19,1	100	251	85	M12	8	64,5	2,35
1 1/4"NPT	32	32	21,4	115	251	89	M12	8	103,8	3,20
1 1/2"NPT	40	40	21,4	130	321	105	M16	10	174,0	5,60
2"NPT	50	50	25,7	150	321	113	M16	10	301,3	7,90