



Three-way brass ball valve Series 5710

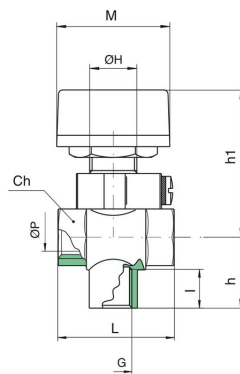

Design type	Shut-off valve with floating ball, full bore passage, for panel mounting
Connection	G1/4" according to ISO228/1
Materials	Body brass CW617N chrome-plated, Ball, brass CW617N, hard chrome-plated, Ball seal PTFE, Spindle seal FKM, Rotary knob polyamide
Mounting type	Installation in rigid piping system
Mounting position	any
Application range	Gases and liquids of group 2 in accordance with PED 2014/68/EU that do not attack the materials used.
Medium temperature	-10...+90°C
Operating pressure	Nominal pressure according to table
Actuation	by 180° rotation of the handle, spring-loaded ball detent indexing 4x90°, at 90° locking position for all ports



Connection	Nominal size DN[mm]	PN [bar]	Ch	h	h1	H	I	L	M	P	Kv value [m³/h]	Weight [approx. kg]	Type
G1/4"	8	10	20	25	52	17	10	41	40	8	2,2	0,20	5710-1/4"



