
Partnership. With Guarantee.

Full-lift safety valve made of red brass, component-tested
Series SF13



Design type	Spring-loaded full-lift safety valves with gas-tight cap, without venting These types are not back-pressure compensated, i.e. any back pressure occurring during venting affects the set pressure. The set pressure is secured against adjustment by the sealing cap.
Connection	Female thread G1/2"...G2"
Materials	Valve body Red brass, Internal parts Brass, Spring Stainless steel 1.4310
Medium temperature	see table
Adjustment range	see table
Mounting type	Installation in rigid piping system
Mounting position	upright only
Application range	see table
Ordering note	Specify the set pressure when ordering
Special versions	Set pressure 25,1...50bar, Inlet with male thread, Valve in ATEX version

+43 512 52076
austria@stasto.eu
© STASTO Automation KG

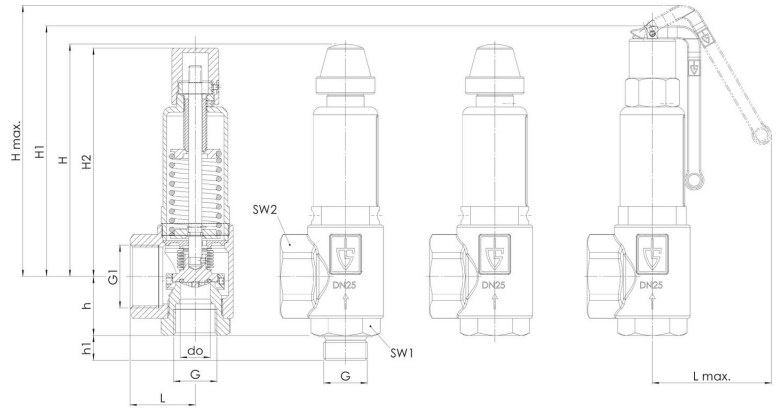

G	G1	L	Lmax.	H	H1	H2	Hmax.	h	h1	SW1	SW2	d 0	Weight [approx. kg]	Type
G1/2"	G1/2"	34	65	79	93	79	105	28	15	30	-	15,8	0,4	SF13-12-15.8-XX
G1/2"	G1"	40	65	77	91	77	103	30	15	30	40	15,8	0,4	SF13-12W-15.8-XX
G3/4"	G3/4"	42	91	137	154	138	169	31	16	36	32	15,8	1,0	SF13-34-15,8-XX
G3/4"	G11/4"	43	91	138	158	139	173	39	16	36	50	18	1,0	SF13-34W-18-XX
G1"	G11/2"	50	92	178	192	175	207	45	18	46	58	23	1,8	SF13-10W-23-XX
G11/4"	G2"	61	92	241	264	241	277	55	20	55	70	30,3	4,0	SF13-114W-30-XX
G11/2"	G2"	61	92	241	264	241	277	69	23	55	70	30,3	4,0	SF13-112W1-30-XX
G2"	G2"	61	92	241	264	241	277	74	25	70	70	30,3	4,0	SF13-20W-18-XX
XX - Set pressure														

Table:

Adjustment range	Seal	Application range	Medium temperature [°C]	Type
0,5 - 25	metallic	flammable and toxic gases and vapours, flammable and toxic liquids	-60...+225	SF13
0,5 - 25	PTFE	flammable and toxic gases and vapours, flammable and toxic liquids	-60...+225	SF13-...T

Relieving capacity at 10% overpressure for Typ SF13 Air [N m ^{3} /h]

Size	Set pressure [bar]														
	0,5	1	2	4	6	8	10	12	14	16	18	20	22	24	25
G1/2"	56	87	141	238	335	431	528	625	722	819	916	1013	1109	1206	1255
G3/4"- d 0 15,8	64	120	205	375	527	680	833	985	1138	1290	1443	1596	1748	1901	1977
G3/4"- d 0 18	127	189	316	561	790	1018	1247	1475	1704	1932	2161	2390	2618	2847	2961
G1"	199	291	489	855	1203	1552	1900	2248	2596	2945	3293	3641	3990	4338	4512
G11/4"...G2"	353	515	832	1484	2088	2693	3297	3902	4506	5111	5715	6320	5111	57515	6320

Relieving capacity at 10% overpressure for Typ SF13 Steam [kg/h]

Size	Set pressure [bar]														
	0,5	1	2	4	6	8	10	12	14	16	18	20	22	24	25
G1/2"	42	69	111	184	257	329	401	472	544	616	686	757	829	900	936
G3/4"- d 0 15,8	48	96	161	291	406	519	632	744	857	970	1081	1193	1306	1419	1475
G3/4"-d 0 18	96	151	249	435	608	777	947	1115	1284	1453	1619	1787	1956	2125	2209
G1"	150	232	385	663	926	1184	1443	1699	1957	2214	2467	2723	2981	3238	3366
G11/4"...G2"	266	411	656	1151	1607	2056	2504	2948	3396	3842	4281	4726	5173	5619	5842

+43 512 52076
austria@stasto.eu
© STASTO Automation KG

Relieving capacity at 10% overpressure for Typ SF13 Water [m^3/h]

Size	Set pressure [bar]														
	0,5	1	2	4	6	8	10	12	14	16	18	20	22	24	25
G1/2"	2,3	3,1	4,4	6,3	7,7	8,9	9,9	10,9	11,8	12,6	13,3	14	14,7	15,4	15,7
G3/4"- d_0 15,8	2,9	4,0	5,6	8	9,7	11,3	12,6	13,8	14,9	15,9	16,9	17,8	18,7	19,5	19,9
G3/4"-d_0 18	5,4	7,3	10,4	14,7	18	20,8	23,2	25,4	27,5	29,4	31,1	32,8	34,4	35,9	36,7
G1"	8,8	12	16,9	24	29,3	33,9	37,9	41,5	44,8	47,9	50,8	53,6	56,2	58,7	59,9
G11/4"	15,4	20,8	29,4	41,6	50,9	58,8	65,8	72	77,8	83,2	88,2	93	97,5	101,9	104

Illustrations non-binding
Design, dimensional and material changes reserved

+43 512 52076
austria@stasto.eu
© STASTO Automation KG