


Multi-coupling Series COMC



Hose diameter [mm]	N Number of couplings	A	B	Weight [g]	Type
6	6	82,5	95,5	645	COMC-PI6X06-N
8	4	82,5	95,5	594	COMC-PI4X08-N

Design type	Multi-coupling, shut-off on both sides
Connection	Push-in fittings 6mm or rather 8mm
Materials	Housing glass fiber reinforced high-performance plastic, Seals NBR, Steel circlips, Push-in fittings brass nickel-plated
recommended Hose materials	Polyamide (PA), Polyurethane (CPU/PU), Polyethylene (PE)
Medium	Compressed air, neutral gases
Medium temperature	-20...+70°C
max. Operating pressure	7bar

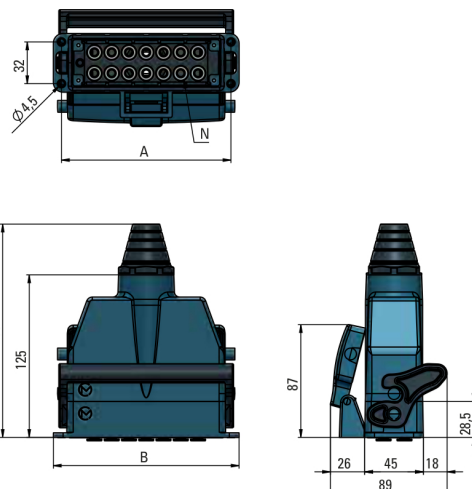

Illustrations non-binding
Design, dimensional and material changes reserved

Pneumatics / Fittings and couplings / Safety clutches / Multi-couplings / Couplings - Multi sytem / Coupling multiple system

