


relief valve made of stainless steel, without inspection number series RV17-..N



design	spring loaded proportional relief valve the upper part is completely closed to the outside, therefore this type is suitable also as safety overflow valve, even with occurring back pressure. the adjustment can be done by hexagonal socket screw according to the adjustment range. the set pressure is protected against adjustments through a lead seal. these types are not adjusted.
connection	inlet female 3/8" NPT...2" NPT according to ANSI B1.20.1, outlet female G3/8" ...G2" according to ISO228/1
materials	valve body and inner parts stainless steel AISI 316, spring stainless steel AISI 301 seals FKM respectively PTFE/FKM, range of adjustment 12...20bar seals PTFE/FKM
application	gaseous and liquid fluids which do not affect the used materials
medium temperature	see table
range of adjustment	0,5...2,5bar / 2...12bar / 12...20bar
type of fixing	installed into rigid pipework
mounting position	any
special version	preset, all seals PTFE
order information	adjustment range has to be specified

table:

seals	range of adjustment [bar]	medium temperature [°C]	type
FKM	0,5...2,5 / 2...12	-20...+200	RV17
PTFE/FKM	0,5...2,5 / 2...12 / 12...20	-60...+225	RV17-...T

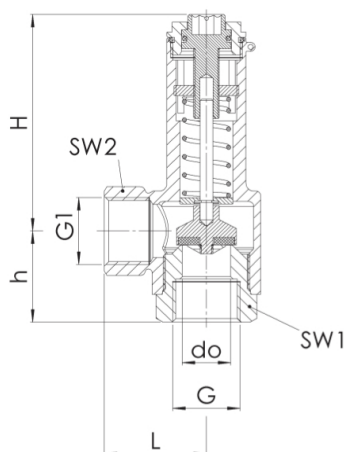

G	G1	d ₀	H	h	L	SW1	SW2	weight [app. kg]	type	type
3/8" NPT	3/8"	10	60	26	27	26	24	0,3	RV17-38N38-10-XX	RV17-38N38-10-XX-T
1/2" NPT	1/2"	13	69	30	30	30	27	0,4	RV17-12N12-13-XX	RV17-12N12-13-XX-T
3/4" NPT	3/4"	19	86	35	33	36	32	0,7	RV17-34N34-19-XX	RV17-34N34-19-XX-T
1" NPT	1"	25	101	41	40	41	46	1,2	RV17-10N10-25-XX	RV17-10N10-25-XX-T
1 1/4" NPT	1 1/4"	30	118	45	45	52	50	1,9	RV17-114N114-30-XX	RV17-114N114-30-XX-T
1 1/2" NPT	1 1/2"	38	139	51	50	58	65	2,5	RV17-112N112-38-XX	RV17-112N112-38-XX-T
2" NPT	2"	50	149	60	60	70	70	3,8	RV17-20N20-50-XX	RV17-20N20-50-XX-T

XX - range of adjustment 0,5/2,5 2/12 12/20

discharge capacity at 1bar overpressure for water [m³/h]

set pressure [bar]	size																				
	3/8" NPT			1/2" NPT			3/4" NPT			1" NPT			1 1/4" NPT			1 1/2" NPT			2" NPT		
	0,5 - 2,5	2 - 12	12 - 20	0,5 - 2,5	2 - 12	12 - 20	0,5 - 2,5	2 - 12	12 - 20	0,5 - 2,5	2 - 12	12 - 20	0,5 - 2,5	2 - 12	12 - 20	0,5 - 2,5	2 - 12	12 - 20	0,5 - 2,5	2 - 12	12 - 20
0,5	2,7	-	-	4,3	-	-	6,1	-	-	10,8	-	-	16,0	-	-	21,7	-	-	31,6	-	-
1	3,0	-	-	4,6	-	-	6,5	-	-	11,9	-	-	16,7	-	-	23,3	-	-	35,6	-	-
1,5	3,2	-	-	4,8	-	-	6,7	-	-	12,6	-	-	17,5	-	-	24,0	-	-	37,7	-	-
2	3,4	1,6	-	5,0	1,8	-	6,9	3,7	-	13,0	4,2	-	18,1	6,2	-	25,2	8,8	-	40,6	17,9	-
2,5	3,7	1,7	-	5,2	1,8	-	7,3	3,8	-	13,7	4,3	-	18,9	6,2	-	26,1	9,1	-	43,0	19,4	-
3	-	1,9	-	-	1,8	-	-	4,1	-	-	4,3	-	-	6,1	-	-	9,3	-	-	21,1	-
4	-	2,2	-	-	1,7	-	-	4,6	-	-	4,5	-	-	6,1	-	-	9,7	-	-	24,7	-
5	-	2,5	-	-	1,6	-	-	5,1	-	-	4,6	-	-	6,0	-	-	10,3	-	-	28,9	-
6	-	2,8	-	-	1,5	-	-	6,1	-	-	4,7	-	-	5,9	-	-	10,6	-	-	30,1	-
7	-	2,9	-	-	1,5	-	-	6,5	-	-	5,0	-	-	5,8	-	-	11,9	-	-	31,7	-
8	-	3,1	-	-	1,4	-	-	7,1	-	-	5,1	-	-	5,6	-	-	13,1	-	-	34,2	-
9	-	3,2	-	-	1,4	-	-	7,3	-	-	5,3	-	-	5,5	-	-	14,3	-	-	37,5	-
10	-	3,4	-	-	1,4	-	-	8,3	-	-	5,5	-	-	5,3	-	-	15,7	-	-	39,3	-
11	-	3,5	-	-	1,4	-	-	9,1	-	-	5,8	-	-	5,2	-	-	17,2	-	-	42,4	-
12	-	3,7	1,7	-	1,3	0,4	-	9,3	2,8	-	5,9	2,2	-	5,0	6,8	-	17,6	10,1	-	43,9	18,9
13	-	-	1,4	-	-	0,4	-	-	2,4	-	-	2,2	-	-	6,5	-	-	10,3	-	-	21,2
14	-	-	1,3	-	-	0,5	-	-	2,2	-	-	1,9	-	-	6,3	-	-	10,5	-	-	24,1
15	-	-	1,1	-	-	0,5	-	-	1,7	-	-	1,6	-	-	6,1	-	-	10,6	-	-	25,7
16	-	-	0,8	-	-	0,5	-	-	1,4	-	-	1,3	-	-	6,0	-	-	10,9	-	-	27,6
17	-	-	0,6	-	-	0,5	-	-	1,1	-	-	1,1	-	-	5,8	-	-	11,0	-	-	29,3
18	-	-	0,4	-	-	0,6	-	-	0,9	-	-	1,0	-	-	5,6	-	-	11,3	-	-	31,8
19	-	-	0,2	-	-	0,6	-	-	0,7	-	-	0,8	-	-	5,1	-	-	11,4	-	-	34,6
20	-	-	0,2	-	-	0,6	-	-	0,7	-	-	0,7	-	-	5,0	-	-	11,5	-	-	36,6

discharge capacity at 1bar overpressure for air [Nm³/h]

set pressure [bar]	size																				
	3/8" NPT			1/2" NPT			3/4" NPT			1" NPT			1 1/4" NPT			1 1/2" NPT			2" NPT		
	0,5 - 2,5	2 - 12	12 - 20	0,5 - 2,5	2 - 12	12 - 20	0,5 - 2,5	2 - 12	12 - 20	0,5 - 2,5	2 - 12	12 - 20	0,5 - 2,5	2 - 12	12 - 20	0,5 - 2,5	2 - 12	12 - 20	0,5 - 2,5	2 - 12	12 - 20
0,5	83	-	-	147	-	-	209	-	-	375	-	-	717	-	-	847	-	-	1376	-	-
1	95	-	-	158	-	-	228	-	-	390	-	-	808	-	-	899	-	-	1546	-	-
1,5	101	-	-	173	-	-	257	-	-	433	-	-	901	-	-	1033	-	-	1734	-	-
2	111	48	-	180	86	-	287	159	-	462	302	-	977	233	-	1104	426	-	1904	788	-
2,5	119	50	-	202	89	-	306	168	-	495	311	-	1031	257	-	1205	447	-	1953	802	-
3	-	51	-	-	95	-	-	188	-	-	322	-	-	272	-	-	481	-	-	821	-
4	-	62	-	-	101	-	-	213	-	-	341	-	-	311	-	-	527	-	-	878	-
5	-	80	-	-	105	-	-	105	-	-	242	-	-	361	-	-	352	-	-	942	-
6	-	90	-	-	111	-	-	250	-	-	380	-	-	397	-	-	597	-	-	994	-
7	-	96	-	-	118	-	-	257	-	-	391	-	-	437	-	-	764	-	-	1050	-
8	-	114	-	-	117	-	-	314	-	-	347	-	-	492	-	-	910	-	-	1123	-
9	-	115	-	-	123	-	-	324	-	-	301	-	-	546	-	-	949	-	-	1187	-
10	-	122	-	-	133	-	-	331	-	-	288	-	-	600	-	-	1023	-	-	1280	-
11	-	121	-	-	138	-	-	339	-	-	274	-	-	569	-	-	1070	-	-	1358	-
12	-	126	96	-	138	112	-	351	221	-	261	305	-	538	594	-	1095	682	-	1480	1237
13	-	-	109	-	-	103	-	-	206	-	-	291	-	-	625	-	-	758	-	-	1277
14	-	-	116	-	-	94	-	-	166	-	-	282	-	-	656	-	-	834	-	-	1388
15	-	-	120	-	-	85	-	-	140	-	-	269	-	-	687	-	-	911	-	-	1499
16	-	-	122	-	-	76	-	-	132	-	-	257	-	-	716	-	-	987	-	-	1609
17	-	-	124	-	-	57	-	-	115	-	-	245	-	-	737	-	-	954	-	-	1821
18	-	-	129	-	-	56	-	-	84	-	-	233	-	-	758	-	-	922	-	-	2033
19	-	-	134	-	-	44	-	-	50	-	-	220	-	-	779	-	-	889	-	-	2245
20	-	-	140	-	-	36	-	-	45	-	-	208	-	-	801	-	-	851	-	-	2357

illustrations are non-binding

all designs, configurations, measurements and materials are subject to change without prior notice