

swing check valve
series CH028



MAIN FEATURES:


- Stainless steel bolts.
- WRAS certificate for drinking water.
- Max. working pressure according to design pressure PN10/16.
- Working temperature between -10°C and 90°C.

STANDARDS APPLIED:

- Hydrostatic tests according to EN 12266-1.
- EC Directive.
- Distance between flanges according to DIN 3202 F6.
- Side flanges according to ISO 7005-2.

DIMENSIONS

DN	L	H
50	200	137
65	240	147
80	260	159
100	300	180
125	350	203
150	400	223
200	500	258
250	600	290
300	700	325

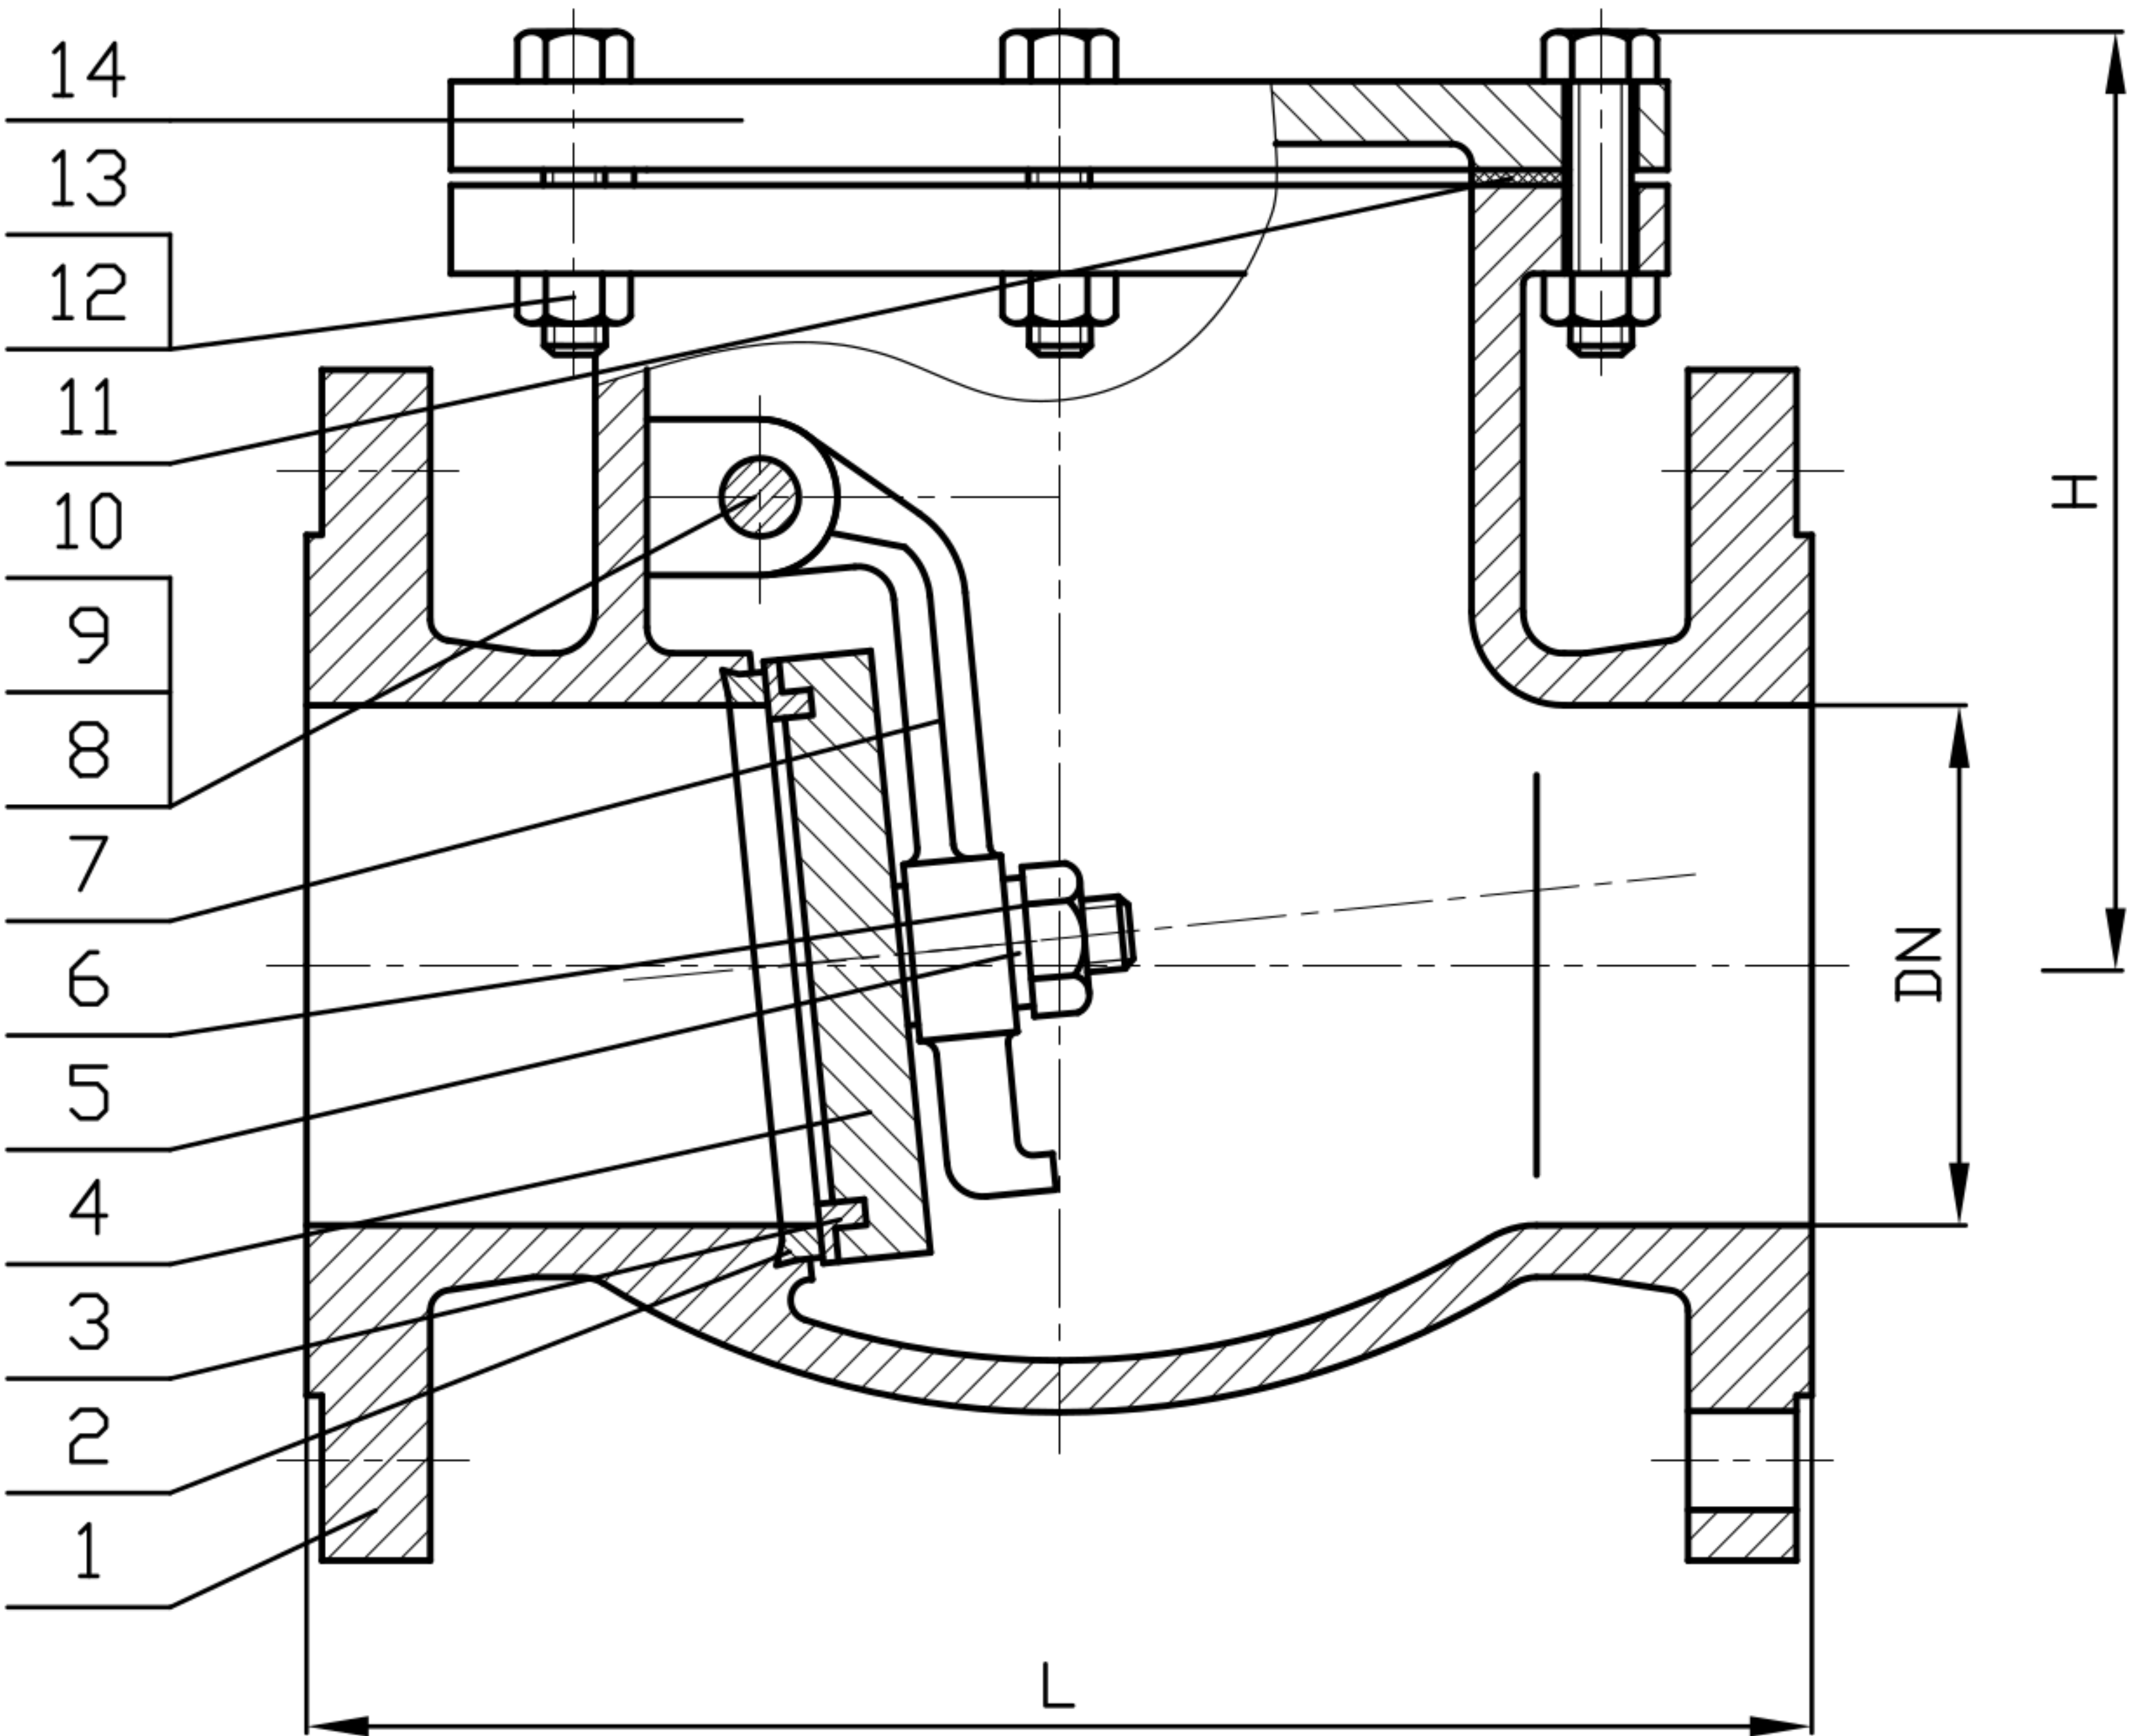


DESCRIPTION

1	BODY	GJS500
2	BODY SEAT RING	BRONZE
3	DISK SEAT RING	BRONZE
4	DISC	GJS500
5	WASHER	A3
6	LOCKING NUT	A3
7	ARM	GJS500
8	HING PIN	AISI 420
9	PLUG	A3
10	GASKET	NYL
11	GASKET	NBR
12	BOLT	A3
13	NUT	A3
14	BONNET	GJS500
	PAINTING RAL 5015	Epoxy 250 µm

The images and drawings are non contractual.
The specifications of the shown products could vary without previous notice.

swing check valve
series CH028

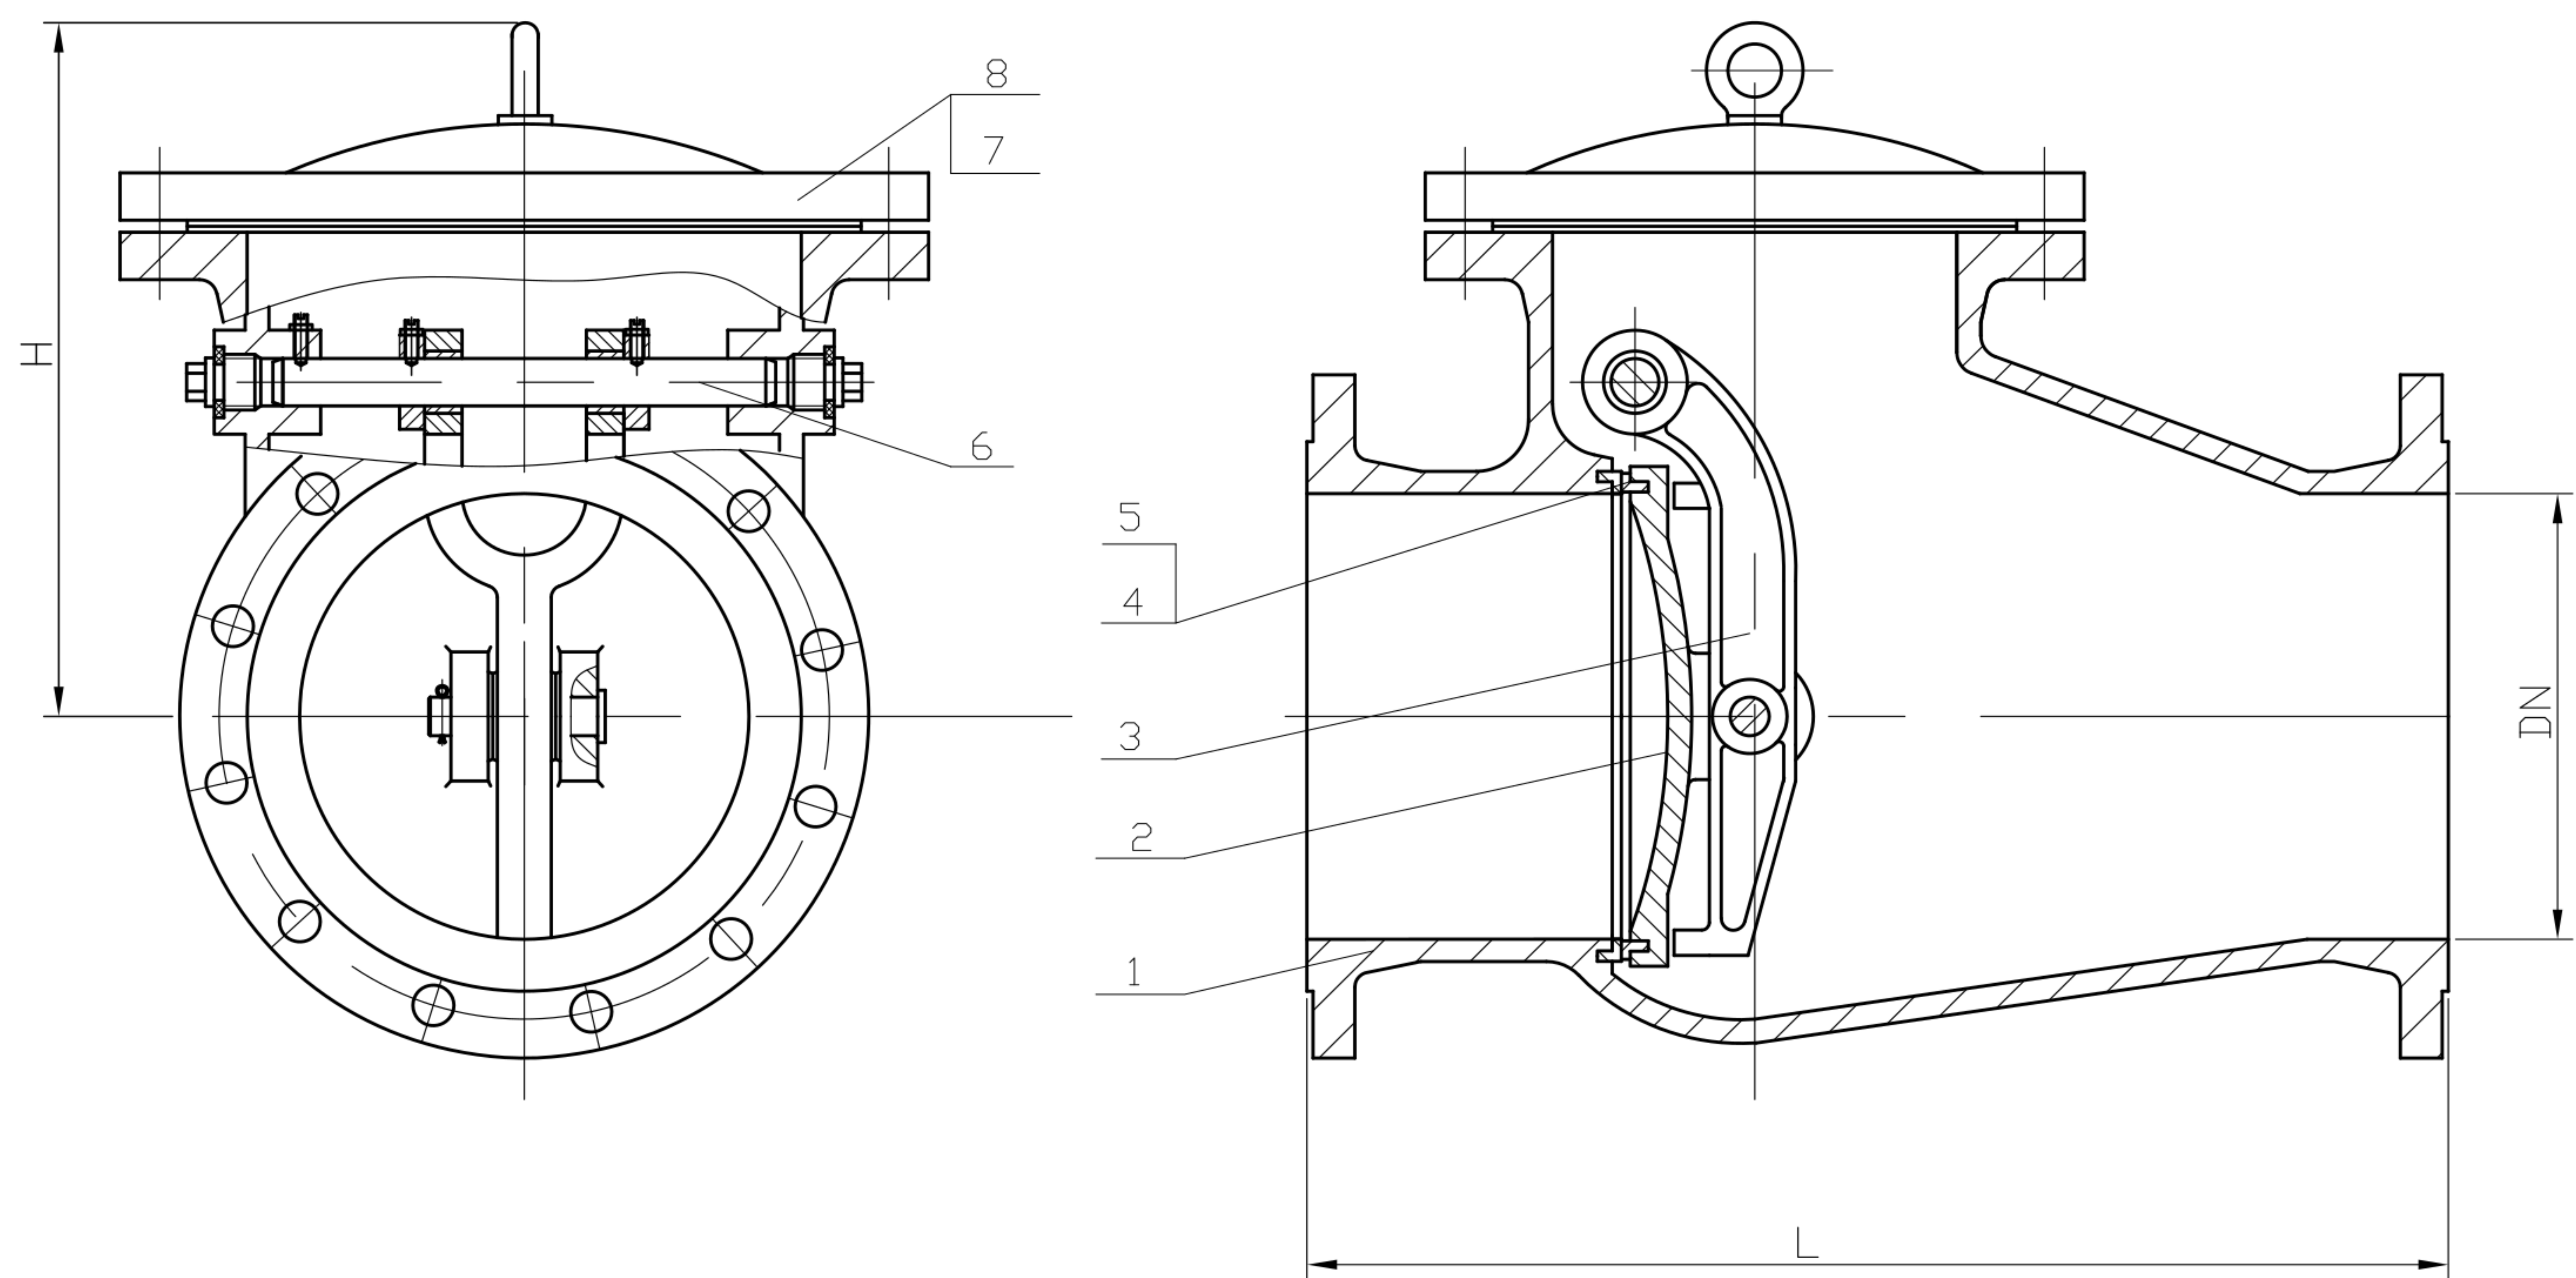

DESCRIPTION		
1	BODY	GJS500
2	DISC	GJS500
3	ARM	GJS500
4	DISC SEAT RING	BRONZE
5	BODY SEAT RING	BRONZE
6	SHAFT	AISI 420
7	BONNET	GJS500
8	GASKET	EPDM
PAINTING RAL 5015		Epoxy 250 µm

DIMENSIONS

DN	L	H
350	800	482
400	900	544
450	1000	595
500	1100	650
600	1300	704
700	1500	830
800	1700	950
900	1900	1025
1000	2100	1125

Abbildungen unverbindlich, Konstruktions-, Maß- und Werkstoffänderungen vorbehalten
illustrations are non-binding, all designs, configurations, measurements and materials are subject to change without prior notice