



## Manual shut-off valve 1/4"

### Type MBA01-14



|                     |                                                                    |
|---------------------|--------------------------------------------------------------------|
| Design type         | Manual shut-off valve, 3/2-way, lockable, with Exhaust air venting |
| Function            | for shutting off the supply pressure and venting the system        |
| Connection          | G1/4" according to ISO228/1                                        |
| Exhaust port        | G1/8" according to ISO228/1                                        |
| Materials           | Housing Acetal resin (POM), Threaded connections Brass             |
| Medium              | filtered and lubricated or non-lubricated compressed air           |
| Medium temperature  | +5...+50°C                                                         |
| Ambient temperature | +5...+50°C                                                         |
| Inlet pressure      | max. 16 bar                                                        |
| Flow direction      | is marked by an arrow                                              |
| Mounting type       | Installation in piping system or Wall mounting                     |
| Mounting position   | any                                                                |
| Scope of delivery   | Valve, Padlock, Silencer                                           |


### Dimensions

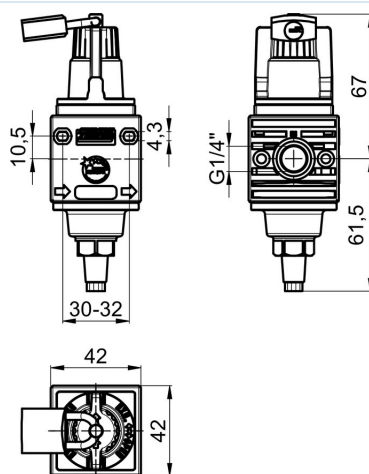

Weight 0,15 kg



Flow diagram

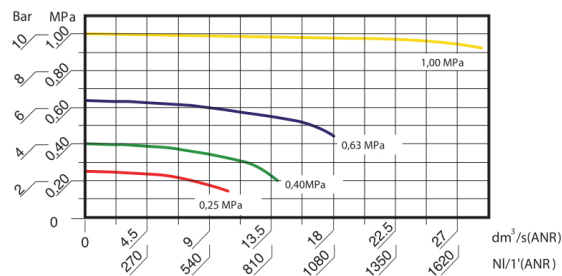

Inlet pressure = 10bar, Flow rate at standard conditions

Illustrations non-binding  
Design, dimensional and material changes reserved

Pneumatics / Regulators, filters and lubricators / Maintenance devices - series FRL / Manual shut-off valve Series MBA / [MBA01-14] Manual shut-off valve MBA01-14

