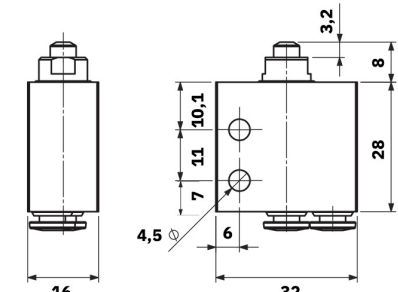



way valves - mechanically operated series PM140, PM141, PM142, PM143

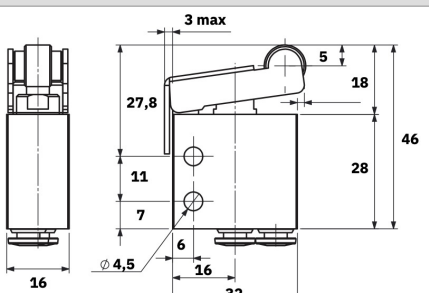



design	seat valve, mechanically operated
connection	4mm push-in fitting (M5 on request)
nominal diameter	2,5mm
pressure range	0...10bar
flow rate	90NI/min
operating force at 6 bar	all others 12N
medium	filtered and lubricated or non lubricated compressed air
information	CAD files are available on the STASTO Store under www.stasto.eu

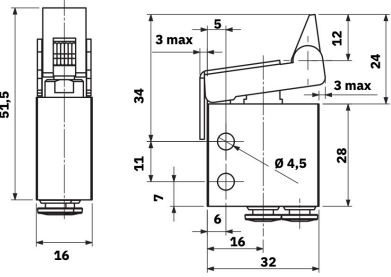

PM140 actuation plunger/spring

		function	type
		3/2-way NC	PM140-04-C

PM141 actuation of roller/spring

		function	type
		3/2-way NC	PM141-04-C

PM142 actuation unidirectional lever/spring

		function	type
		3/2-way NC	PM142-04-C

illustrations are non-binding
all designs, configurations, measurements and materials are subject to change without prior notice