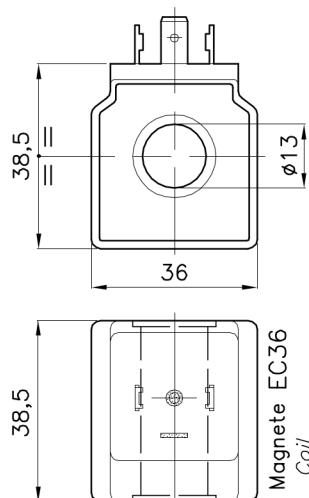


**CARATTERISTICHE**


Peso	0.200 Kg
Potenza assorbita	
AC (a freddo)	32VA
DC (a freddo)	22W

La potenza allo spunto è
max 3.5 volte maggiore di
quella di servizio

PERFORMANCE

Weight	
Power consumption	
AC (cold coil)	
DC (cold coil)	

Power at starting is
max 3.5 times higher
than the service power

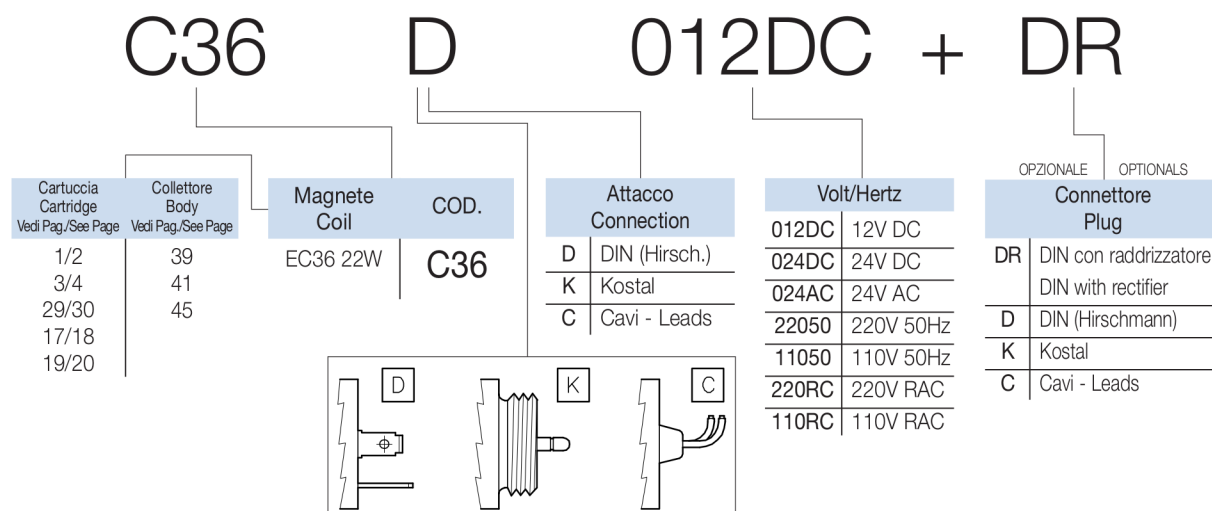**CODICE DI ORDINAZIONE
HOW TO ORDER****NOTE:**

The coils are supplied to operate continuously. The working duty ED is the ratio between energized time T1 and full cycle time TC, where TC=T1+TR (TR de-energized time). $ED = T1/TC * 100\%$

Working continuously duty means that all the coils have ED=100% (in the limits of the operating temperature).

The maximum working temperature for the coils is 125°C: the ambient temperature must be between -30°C and +50°C. Fluctuations in the operating voltage must not exceed +/- 10% of the nominal voltage. Exceeding this limit will result in incorrect operations of the cartridges.

Connectors are standard DIN 43650 - ISO 4400 (Hirschmann). On request are available also Kostal connectors and wires. To calculate the current intensity use the following formulas:

alternate current: $intensity(A) = power(VA) / tension(V)$

direct current: $intensity(A) = power(W) / tension(V)$