



ball valves made of stainless steel series BA329

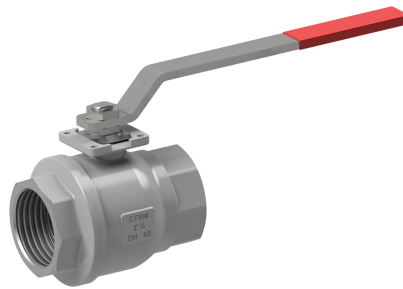

design	two way ball valve with floating ball, full bore, compensation hole
actuation	with 90° turn of the handle
connection	RP1/8"...RP4" according to ISO7/1 respectively NPT1/8"...NPT4" according to ANSI B 1.20.1
materials	body and ball stainless steel AISI 316, ball seal PTFE-fibre-glass-reinforced, stem seal PTFE/EPDM hand lever stainless steel AISI 430 plastic coated, RP 21/2" to RP4" made of steel
application	group 1 and 2 liquids and gases acc. to PED 2014/68/EU and which do not affect the used materials. we recommend the use of special steam ball valves for applications with steam.
medium temperature	-40...+160°C
operating pressure	vacuum max. 10^{-2} Torr to nominal pressure according to table and pressure-temperature diagram
type of fixing	installed into rigid pipework
mounting position	any
approvals	TA-Luft, SIL 3
special versions	antistatic design ATEX EX II 2G Ex h IIC T6...T1 Gb / II 2D Ex h IIIC T85°C...T450°C Db, fire-safe, free of oil, grease and silicon for oxygen on request

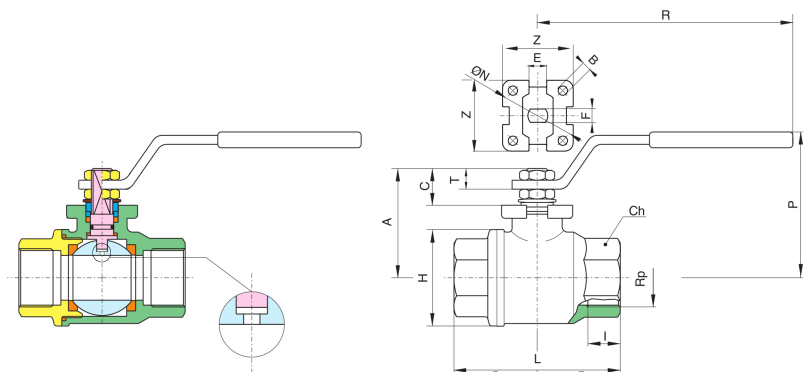


RP	nominal diameter DN[mm]	PN [bar]	A	B	C	CH	E	F	H	I	L	N	R	P	T	Z	kv value [m ³ /h]	weight [app. kg]	type
1/8"	6	140	35	5,5	13,5	22	8	5	30	7,7	55	36	110	50	9	36	5	0,26	BA329-18-L
1/4"	8	140	35	5,5	13,5	22	8	5	30	11	55	36	110	50	9	36	5,5	0,26	BA329-14-L
3/8"	10	140	35	5,5	13,5	22	8	5	30	11,4	55	36	110	50	9	36	8,5	0,25	BA329-38-L
1/2"	15	140	38	5,5	13,5	27	8	5	36	15	66	36	110	53	9	36	19,2	0,34	BA329-12-L
3/4"	20	105	55	5,5	15	32	10	7	45	16,3	79	42	131	68	10	42	35,0	0,59	BA329-34-L
1"	25	105	60	5,5	19,5	41	12	8	54	19,1	93	42	174	79	12,5	42	64,5	0,96	BA329-10-L
1 1/4"	32	64	64,5	5,5	19,5	50	12	8	64	21,4	100	42	174	83	12,5	42	103,8	1,29	BA329-114-L
1 1/2"	40	64	79	6,5	24	55	16	10	80	21,4	110	50	250	100	16,5	50	174	2,15	BA329-112-L
2"	50	64	86	6,5	24	70	16	10	95	25,7	131	50	250	107	16,5	50	301,3	3,30	BA329-20-L
2 1/2"	65	25	104	M8	28,5	90	20	14	122	30,2	159	70	321	126	18,5	64	545,7	6,74	BA329-212-L
3"	80	25	114	M8	28	105	20	14	144	33,3	185	70	321	137	18	64	872,5	10,15	BA329-30-L
4"	100	25	137	M10	34,5	130	24	18	177	39,3	222	102	381	156	22	92	1363,3	17,40	BA329-40-L

for ATEX versions, add -A at the end of the type.

RP	nominal diameter DN[mm]	PN [bar]	A	B	C	CH	E	F	H	I	L	N	R	P	T	Z	kv value [m ³ /h]	weight [app. kg]	type
1/8"NPT	6	140	35	5,5	13,5	22	8	5	30	7,7	55	36	110	50	9	36	5	0,26	BA329-18N-L
1/4"NPT	8	140	35	5,5	13,5	22	8	5	30	11	55	36	110	50	9	36	5,5	0,26	BA329-14N-L
3/8"NPT	10	140	35	5,5	13,5	22	8	5	30	11,4	55	36	110	50	9	36	8,5	0,25	BA329-38N-L
1/2"NPT	15	140	38	5,5	13,5	27	8	5	36	15	66	36	110	53	9	36	19,2	0,34	BA329-12N-L
3/4"NPT	20	105	55	5,5	15	32	10	7	45	16,3	79	42	131	68	10	42	35,0	0,59	BA329-34N-L
1"NPT	25	105	60	5,5	19,5	41	12	8	54	19,1	93	42	174	79	12,5	42	64,5	0,96	BA329-10N-L
1 1/4"NPT	32	64	64,5	5,5	19,5	50	12	8	64	21,4	100	42	174	83	12,5	42	103,8	1,29	BA329-114N-L
1 1/2"NPT	40	64	79	6,5	24	55	16	10	80	21,4	110	50	250	100	16,5	50	174	2,15	BA329-112N-L
2"NPT	50	64	86	6,5	24	70	16	10	95	25,7	131	50	250	107	16,5	50	301,3	3,30	BA329-20N-L
2 1/2"NPT	65	25	104	M8	28,5	90	20	14	122	30,2	159	70	321	126	18,5	64	545,7	6,74	BA329-212N-L
3"NPT	80	25	114	M8	28	105	20	14	144	33,3	185	70	321	137	18	64	872,5	10,15	BA329-30N-L
4"NPT	100	25	137	M10	34,5	130	24	18	177	39,3	222	102	381	156	22	92	1363,3	17,40	BA329-40N-L

for ATEX versions, add -A at the end of the type.

pressure-temperature-diagram

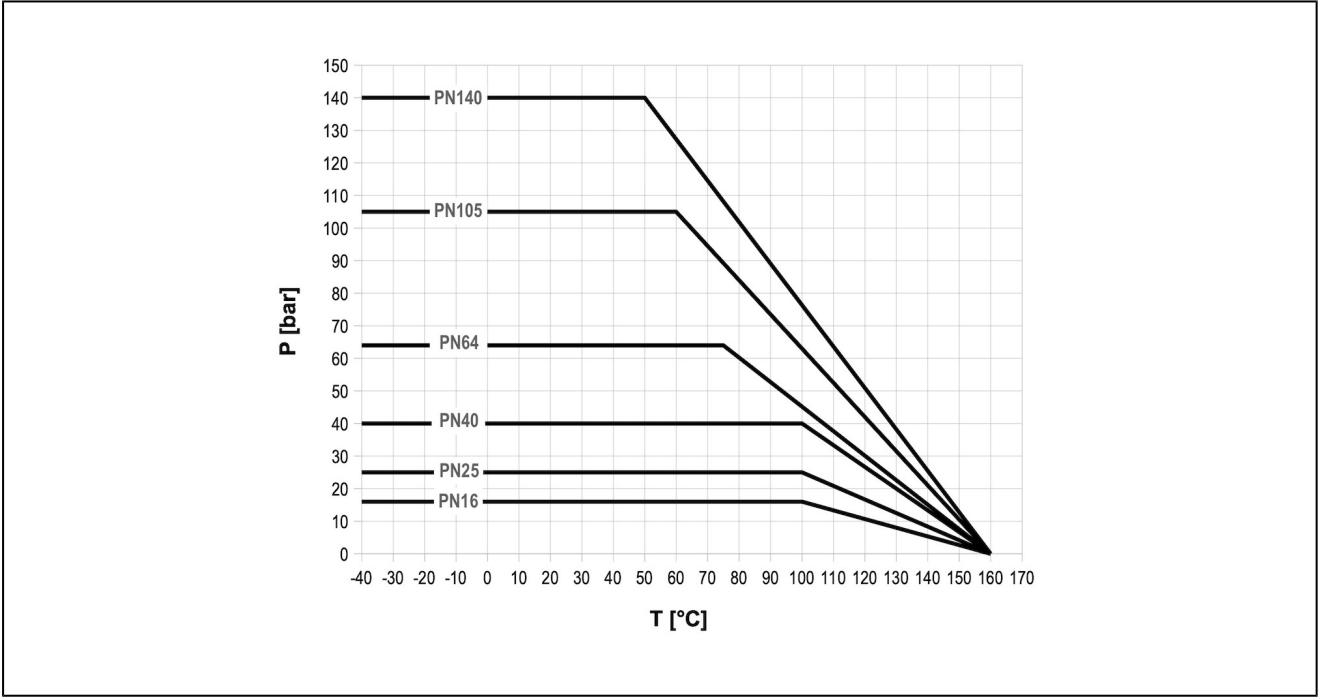

illustrations are non-binding
all designs, configurations, measurements and materials are subject to change without prior notice