


Linearna vođica za ISO cilindre sa priborom Serija GLH

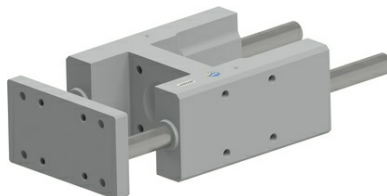

Konstrukcija	Linearno vođenje za montažu na cilindar prema ISO 6432, ISO 15552
Telo	anodizirani aluminijum
Vodne šipke	Čelik hromiran i brušen ili Kaljeni čelik, hromiran i brušen
Klizni ležaj	Mesing ili Kuglični ležaj
Napomena	sve Linearne vođice su opremljene brtvenim strugačima CAD datoteke su dostupne u STASTO Store na www.stasto.eu

Ključ tipa



GLH	---	---	---
20 ø20	Hod [mm]	BSsa kliznim ležajem od mesinga, Čelik hromiran, brušen	
25 ø25		BSsa kugličnim ležajem, Kaljeni čelik, hromiran, brušen	
32 ø32			
40 ø40			
50 ø50			
63 ø63			
80 ø80			
100 ø100			

Standardni hodovi, Težina

Ø	25	50	80	100	125	160	200	250	300	400	500	Težina pribl. za Hod "0mm" [kg]	Težina dodati po 100 mm hoda pribl. [kg]
20	•	•	•	•	•	•	•	•				0,785	0,122
25	•	•	•	•	•	•	•	•				0,785	0,122
32	•	•	•	•	•	•	•	•				1,3	0,176
40	•	•	•	•	•	•	•	•	•	•	•	2,3	0,312
50	•	•	•	•	•	•	•	•	•	•	•	3,6	0,490
63	•	•	•	•	•	•	•	•	•	•	•	4,5	0,490
80	•	•	•	•	•	•	•	•	•	•	•	8,7	0,765
100	•	•	•	•	•	•	•	•	•	•	•	11,0	0,765
Specijalni hod na upit													



Linearna vodica Ø20 i 25

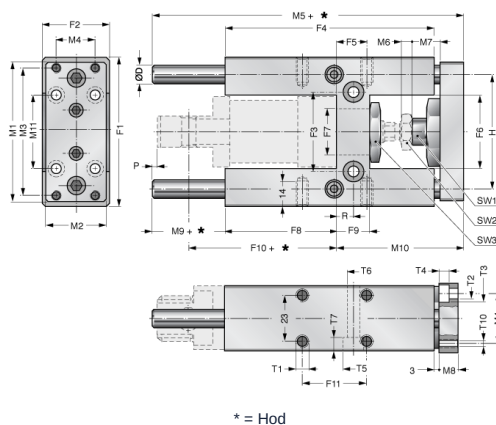



* = Hod

Ø	ØD	H	R	P	F1	F2	F3	F4	F5	F6	ØF7	F8	F9	F10	F11	M1	M2	M3	M4	Tip
20	10	58	8,5	6	79	34	38	108	15	37	22	58	17	71	32,5	76	32	68	20	GLH20...
25	10	58	8,5	1	79	34	38	108	15	37	22	58	17	76	32,5	76	32	68	20	GLH25...

Ø	M5	M6	M7	M8	M9	M10	M11	ØT1	ØT2	ØT3	T4	ØT5	ØT6	T7	ØT10	SW1	SW2	SW3	Tip
20	160	5	22	12	37	65	40	M6	5,5	9	5,5	10,5	6,5	7	M5	13	13	27	GLH20...
25	160	6	17	12	37	65	40	M6	5,5	9	5,5	10,5	6,5	7	M5	13	13	27	GLH25...

Adapter za Ø12 i Ø16 vidi tabelu Setovi adaptera

Montažna ploča za linearno vođenje Ø20 i 25

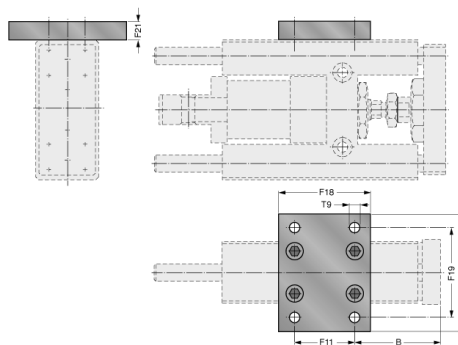

Ø	B	F11	F18	F19	F20	F21	ØT9	Težina [kg]	Tip
20/25	50	32,5	50	50	64	10	6,5	0,27	GLH2025P

Materijal: pocinkovani čelik

Sadržaj isporuke: uklj. 4 Montažni vijci

Verzija 10

138265 / Generisano 2026/33 SR

PROIZVEDENO U EVROPI

+381 11 2399521

balkan@stasto.eu

© STASTO Automatizacija d.o.o.



www.stasto.rs

Otvori seriju online

Strana 2 / 5



Linearna vodica Ø32...100

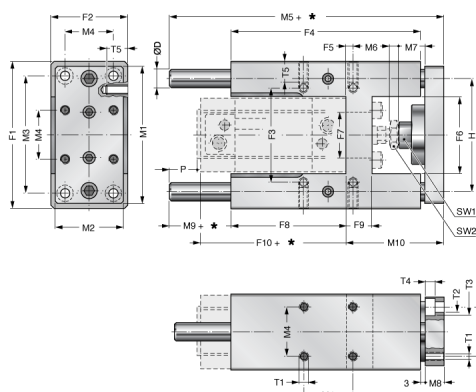



* = Hod

Ø	D	F1	F2	F3	F4	F5	F6	ØF7	F8	F9	F10	H	M1	M2	M3	M4	M5	M6	M7	M8	M9	M10	P	ØT1	ØT2	ØT3	T4	T5	SW1	SW2	Tip
32	12	97	50	61	125	4,3	50,2	30	76	17	94	74	90	45	78	32,5	177	6	17	12	37	64	15	M6	6,5	10,5	6,5	14	13	17	GLH32...
40	16	115	58	69	140	11	58,2	35	81	21	105	87	110	54	84	38	192	7	22	12	37	74	9	M6	6,5	10,5	6,5	14	15	19	GLH40...
50	20	137	70	85	150	18,8	70,2	40	79	26	106	104	130	63	100	46,5	205	8	26	15	37	89	8	M8	8,5	13,5	9	16	22	24	GLH50...
63	20	152	85	100	182	15,3	85,2	45	111	26	121	119	145	80	105	56,5	237	8	26	15	37	88	23	M8	8,5	13,5	9	16	22	24	GLH63...
80	25	189	105	130	215	21	105,4	45	128	34	128	148	180	100	130	72	280	9	32	20	42	110	40	M10	11	18	11	20	27	30	GLH80...
100	25	213	130	150	220	24,5	130,4	55	128	39	138	173	200	120	150	89	280	9	32	20	37	115	25	M10	11	18	11	20	27	30	GLH100...

Adapter za Ø20 i Ø25 vidi tabelu Setovi adaptera

Montažna ploča za linearno vođenje Ø32...100

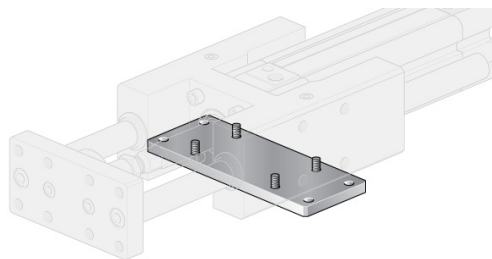

Ø	B	M4	F18	F19	F20	F21	ØT9	Težina [kg]	Tip
32	59,7	32,5	50	116	130	10	6,5	0,5	GLH32P
40	63	38	55	140	160	10	9	0,7	GLH40P
50	70,2	46,5	70	160	180	12	9	1,2	GLH50P
63	73,7	56,5	80	175	195	12	9	1,48	GLH63P
80	89	72	100	218	242	15	12	2,85	GLH80P
100	90,5	89	120	245	272	15	14	3,9	GLH100P

Materijal: pocinkovani čelik

Sadržaj isporuke: uklj. 4 Montažni vijci

Verzija 10

138265 / Generisano 2026/33 SR

PROIZVEDENO U EVROPI

+381 11 2399521

balkan@stasto.eu

© STASTO Automatizacija d.o.o.


www.stasto.rs

Otvori seriju online


Strana 3 / 5



Prirubničko pričvršćenje za zatezne šipke RFGLH

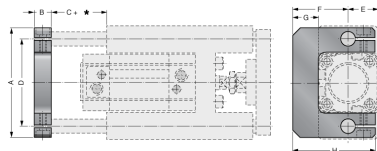

* = Hod

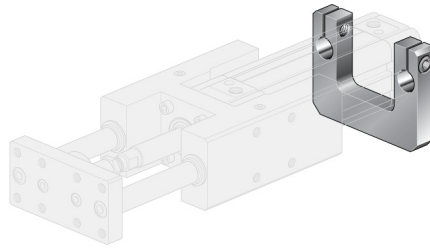

Ø	A	B	C	D	E	F	G	H	Težina [kg]	Tip
25 / 25	78	12	22	58	16,5	37,5	13,5	54	0,11	RFGLH20/25
32	95	15	22	74	25	47	22	70	0,17	RFGLH32
40	113	20	17	87	29	54	25	80	0,31	RFGLH40
50	134	20	17	104	35	67,5	32,5	100	0,46	RFGLH50
63	149	20	17	119	42,5	80,5	38	120	0,6	RFGLH63
80	185	25	12	148	52,5	101,5	49	150	1,15	RFGLH80
100	209	25	12	173	65	116	51	165	1,35	RFGLH100

Materijal: Aluminij

Sadržaj isporuke: ukj. 2 Stezni vijci


Adapter setovi

Linearna vodica Tip	Ø12	Ø16	Ø20	Ø25	Ø32	Ø40	Ø50	Ø63	Ø80	Ø100
GLH20../GLH25..	RF25/12 N12/25	RF25/16 NC16/25	X	X						
GLH32..			RF32/20 NC20/32	RF32/25 NC25/32	X					
GLH40..			RF40/20 N20/40	RF40/25 N25/40	•	X				
GLH50..					RF50/32 N32/50	•	X			
GLH63..					RF63/32 N32/63	RF63/40 N40/63	•	X		
GLH80..						RF80/40 N40/80	RF80/50 N50/80	•	X	
GLH100..							RF100/50 N50/100	RF100/63 N63/100	•	X


• dostupno na zahtev

X bez adaptera

Savijanje GLH BB-BS

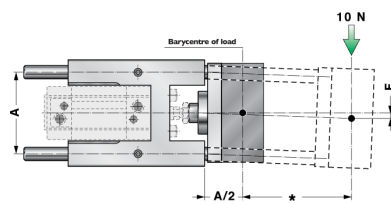

* = Hod



Stroke = Hod

Verzija 10

138265 / Generisano 2026/33 SR

PROIZVEDENO U EVROPI

+381 11 2399521

balkan@stasto.eu

© STASTO Automatizacija d.o.o.


www.stasto.rs

Otvori seriju online


Strana 4 / 5



Maksimalno opterećenje GLH BS

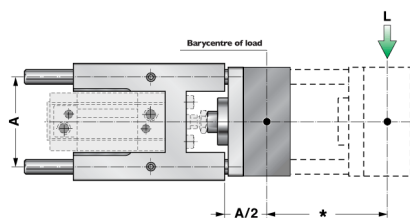


* = Hod




Stroke = Hod

Maksimalno opterećenje GLH BB : Za hodove ispod 60mm maksimalno opterećenje L treba pomnožiti sa redukcionim faktorom K.

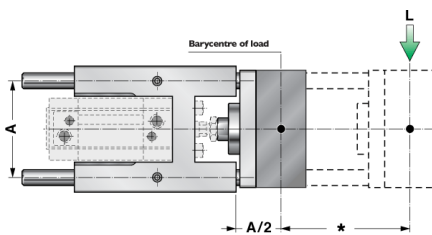


* = Hod

Hod	K
50	0,9
40	0,8
30	0,7
20	0,6



Stroke = Hod



Ilustracije neobavezujuće

Zadržavamo pravo na konstruktivne, dimenzione i promene materijala.

