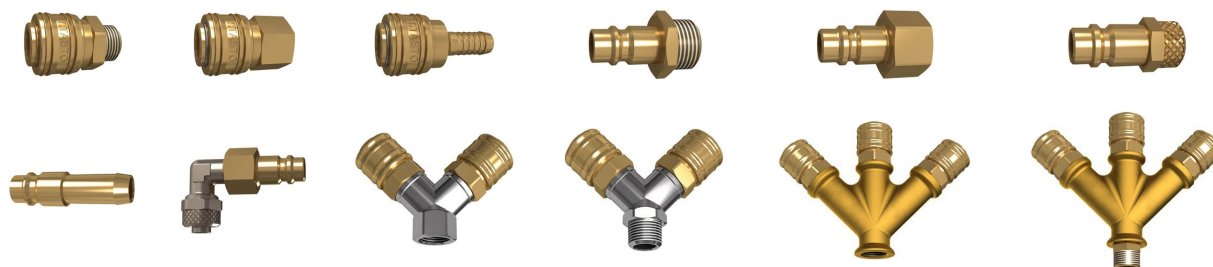



Couplings DN 7,2mm Series C0.72-B




Design type	Coupling sockets, coupling plugs and multiple coupling socket manifold distributors, single-acting shut-off
Nominal size	DN 7,2mm
Materials	Body, valve and connector Brass, Stainless steel spring 1.4310, Seal NBR
Nominal flow rate	960NI/min at 6 bar (Δp 0,5bar)
Medium	Compressed air, neutral gases and liquids
Medium temperature	-20...+100°C
Operating pressure	-0,87...35bar

C0C72-M Coupling socket - Male thread


	D1	D2	L1	L2	CH	Weight [g]	Type
	G1/8"	27	7	38	22	70	C0C72-M18-B
	G1/4"	27	9	39	22	73	C0C72-M14-B
	G3/8"	27	9	41	22	76	C0C72-M38-B
	G1/2"	27	10	44	24	87	C0C72-M12-B

C0C72-F Coupling socket - Female thread


	D1	D2	L1	L2	CH	Weight [g]	Type
	G1/4"	27	9	39	22	90	C0C72-F18-B
	G1/4"	27	10,5	41	22	92	C0C72-F14-B
	G3/8"	27	10,5	41	22	85	C0C72-F38-B
	G1/2"	27	12	43	24	87	C0C72-F12-B




C0C72-H Coupling socket - Hose nozzle

	Hose inner diameter	D2	L2	Weight [g]	Type
	6	27	55	64	C0C72-H06-B
	8	27	55	67	C0C72-H08-B
	9	27	55	68	C0C72-H09-B
	10	27	55	70	C0C72-H10-B
	13	27	55	75	C0C72-H13-B


C0P72-M Coupling plug - Male thread

	D1	L1	CH	Weight [g]	Type
	G1/8"	31	13	17	C0P72-M18-B-C
	G1/4"	33	17	21	C0P72-M14-B-C
	G3/8"	33	19	26	C0P72-M38-B-C
	G1/2"	35	24	41	C0P72-M12-B-C


C0P72-F Coupling plug - Female thread

	D1	L1	CH	Weight [g]	Type
	G1/8"	31	13	16	C0P72-F18-B
	G1/4"	33	17	24	C0P72-F14-B
	G3/8"	33	19	23	C0P72-F38-B
	G1/2"	35	24	38	C0P72-F12-B


C0P72-S Coupling plug - Hose connection

	D1	L1	Weight [g]	Type
	6/4	34	18	C0P72-S06-B
	8/6	34	19	C0P72-S08-B
	10/8	43	38	C0P72-S10-B

C0P72-H Coupling plug - Hose nozzle


	Hose inner diameter	L1	Weight [g]	Type
	6	44	14	C0P72-H06-B
	8	44	18	C0P72-H08-B
	9	44	17	C0P72-H09-B
	10	47	19	C0P72-H10-B
	13	47	24	C0P72-H13-B

C0P72-E Coupling plug - Hose connection


	D1	L1	L2	CH1	CH2	CH3	Weight [g]	Type
	6/4	22,5	39	14	9	12	33	C0P72-E06-B
	10/8	25,5	44,5	17	11	16	56	C0P72-E10-B




C0C72-2F 2-way Coupling socket manifold - Female thread

	D1	L1	L2	CH1	Weight [g]	Type
	G1/4"	14	49	17	186	C0C72-2F14-B
	G3/8"	16	51	20	209	C0C72-2F38-B
	G1/2"	18	57	25	270	C0C72-2F12-B


C0C72-2M 2-way Coupling socket manifold - Male thread

	D1	L1	L2	CH1	Weight [g]	Type
	G1/4"	20	49	17	191	C0C72-2M14-B
	G3/8"	22	51	20	220	C0C72-2M38-B
	G1/2"	26	57	25	286	C0C72-2M12-B

C0C72-3F 3-way Coupling socket manifold - Female thread

	D1	L1	L2	L3	Weight [g]	Type
	G1/4"	20	83	77	443	C0C72-3F14-B
	G3/8"	16	83	77	431	C0C72-3F38-B
	G1/2"	23	78	78	435	C0C72-3F12-B

C0C72-3F 3-way Coupling socket manifold - Male thread

	D1	L1	L2	L3	Weight [g]	Type
	G1/4"	30	83	77	457	C0C72-3M14-B
	G3/8"	30	83	77	449	C0C72-3M38-B
	G1/2"	33	79	76	467	C0C72-3M12-B

Illustrations non-binding

Design, dimensional and material changes reserved

Pneumatics / Fittings and couplings / Couplings / Coupling plug Standard / Couplings DN 7,2 - Brass

Version 8

138554 / Generated 2026/33 EN

+43 512 52076
austria@stasto.eu
© STASTO Automation KG

www.stasto.com
Open series online
Page 3 / 3

