

3/2-Way valve pneumatically actuated Series SE10, SE11, SE12, SE13, SE20



Design type	3/2-way poppet valve, pneumatically actuated
Connection	RP1/2"...RP11/2" according to ISO7/1 on request: NPT thread
Materials	Housing red brass Standard seat seal PTFE
Control medium	Compressed air and neutral gases (Liquids on request)
Application range	gaseous and liquid media that do not attack the materials used
Viscosity of the medium	max. 600 mm ² /s (600cSt)
Medium temperature	Metal cap: -30°C...+170°C High-temperature version up to 200°C on request
Ambient temperature	-30°C...+60°C
Control pressure	see table
Operating pressure	see table
Accessories	Limit switch, Pilot valve, Manual override actuation, Manual emergency override, oil- and grease-free version




Order code


		SE 10 - N 112 - R T 81 - 01					
	Spring return closed	10					
	spring opens	11					
	Dividing function	12					
	Mixing function	13					
Type	Shut-off function	20					
Connection type	no specification, if female thread ISO7/1						
	NPT thread	N					
Connection	DN15-1/2"	12					
	DN20-3/4"	34					
	DN25-1"	10					
	DN32-11/4"	114					
	DN40-11/2"	112					
Materials	Red brass (DN15 - DN50)		R				
Seat seal	PTFE		T				
Actuator	Piston Ø50mm, double-acting			50			
	Piston Ø50mm, 1 Spring			51			
	Piston Ø50mm, 2 Springs			52			
	Piston Ø50mm, 3 Springs			53			
	Piston Ø80mm, double-acting			80			
	Piston Ø80mm, 1 Spring			81			
	Piston Ø80mm, 2 Springs			82			
	Piston Ø80mm, 3 Springs			83			
	Piston Ø125mm, double-acting			125			
	Piston Ø125mm, 1 Spring			1251			
	Piston Ø125mm, 2 Springs			1252			
	Piston Ø125mm, 3 Springs			1253			
Special version	described in the item text					01,02,03....	




Technical specifications and Dimensions

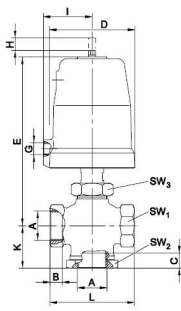

Dividing, mixing and shut-off function, Type SE12, SE13, SE20

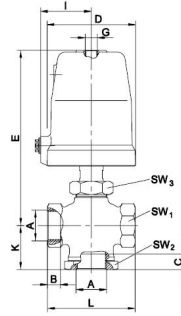

Actuation: spring opens, Type SE11

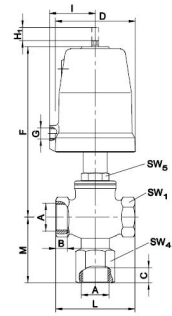

Actuation: spring return closed, Type SE10

Connection A	Nominal size DN [mm]	Actuator	B	C Rp	C NPT	D	E	F	G	H	H1	K	L	M	SW1	SW2	SW3	SW4	SW5	Kvs values [m ³ /h]	Weight [kg]
RP1/2"	15	50	13	13,2	15	62	152	147	G1/8"	9	5	39	80	68	33	41	41	36	30	5,3	1,5
RP1/2"	15	80	13	13,2	15	98	19	186	G1/4"	9	5	39	80	68	33	41	41	36	30	5,3	3,1
RP3/4"	20	50	13	16,3	15	62	1158	147	G1/8"	9	5	42	80	68	33	41	41	36	30	7,3	1,5
RP3/4"	20	80	13	16,3	15	98	191	186	G1/4"	9	5	42	80	68	33	41	41	36	30	7,3	3,1
RP1"	25	50	14	16,8	18	62	158	165	G1/8"	11	8	47	95	73	41	55	41	41	30	12,3	1,9
RP1"	25	80	14	16,8	8	98	191	204	G1/4"	11	8	47	95	73	41	55	41	41	30	12,3	3,5
RP1"	25	125	14	16,8	18	146	215	228	G1/4"	11	8	47	95	73	41	55	41	41	3	12,3	5,6
RP11/4"	32	80	18	19	19	98	208	211	G1/4"	18,5	9	61	132	93	58	75	41	55	032	20	4,8
RP11/4"	32	125	18	19	19	146	232	235	G1/4"	18,5	9	61	132	93	58	75	41	55	32	20	6,7
RP11/2"	40	80	18	19	19	98	208	211	G1/4"	18,5	9	61	132	93	58	75	41	55	32	23	4,8
RP11/2"	40	125	18	19	19	146	232	235	G1/4"	18,5	9	61	132	93	58	75	41	55	32	23	6,7

Versions

Dividing function	Mixing function	Actuation: spring return closed	Actuation: spring opens	Shut-off function
SE12	SE13	SE10	SE11	SE20



Maximum permissible pilot pressures


Nominal size DN	Actuator diameter [mm]	Compression springs	max. control pressure			
			Dividing function, SE12	Mixing function, SE13	Spring return closed, SE10	spring opens, SE11
15/20	50	1	9	9,8	9	9
15/20	80	1	7	7,2	-	5
25	50	1	9	9,8	9	9
25	80	1	7	7,2	5	6,4
25	80	2	-	7,9	-	-
25	125	1	2,8	2,8	-	2,6
25	125	2	-	3,6	-	-
32/40	80	1	7	7,7	5	-
32/40	125	1	3	3	2	3,8
32/40	125	2	-	3,9	-	-

Maximum permissible differential and control pressure for shut-off function, Type SE20

Nominal size DN	max. differential pressure [bar]	Control pressure [bar]	Actuator diameter [mm]	Springs*
15/20	4,5	3,8 - 9,7	50	1
15/20	9	4,8 - 10	50	2
25	3,5	4,9 - 10	50	2
15/20	16	2,9 - 7,2	80	1
25	10	3,2 - 7,4	80	1
25	16	4,4 - 8,7	80	3
32/40	7	4,4 - 8,5	80	2
32/40	9	5,4 - 9,5	80	3
32/40	4	1,5 - 3,0	125	1
32/40	10	2,2 - 3,9	125	2
32/40	14	3,0 - 4,6	125	3

*Standard spring configuration 1 compression spring

Selection charts - Dependence of operating pressure/control pressure

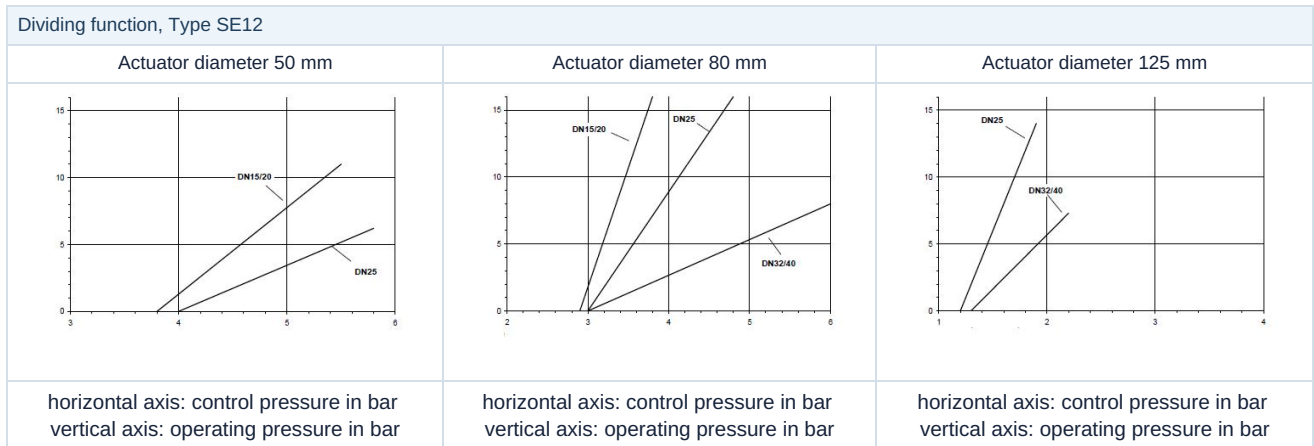

Mixing function, Type SE13		
Actuator diameter 50 mm	Actuator diameter 80 mm	Actuator diameter 125 mm
horizontal axis: control pressure in bar vertical axis: operating pressure in bar	horizontal axis: control pressure in bar vertical axis: operating pressure in bar	horizontal axis: control pressure in bar vertical axis: operating pressure in bar

Spring return closed, Type SE10		
Actuator diameter 50 mm	Actuator diameter 80 mm	Actuator diameter 125 mm
horizontal axis: control pressure in bar vertical axis: operating pressure in bar	horizontal axis: control pressure in bar vertical axis: operating pressure in bar	horizontal axis: control pressure in bar vertical axis: operating pressure in bar

spring opens, Type SE11		
Actuator diameter 50 mm	Actuator diameter 80 mm	Actuator diameter 125 mm
horizontal axis: control pressure in bar vertical axis: operating pressure in bar	horizontal axis: control pressure in bar vertical axis: operating pressure in bar	horizontal axis: control pressure in bar vertical axis: operating pressure in bar

Illustrations non-binding
Design, dimensional and material changes reserved

Armatures / Valves, butterfly valves and gate valves - automatically operated / Seat valves - pneumatically operated / Pneumatically operated seat valve Series SE10-RT