

Directional control valves - mechanically actuated

Series MA, MV, MR and MS



PM140



MV .. 4





MR .. 4



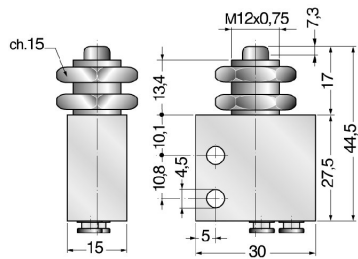



MS .. 4

Design type	Poppet valve, mechanically actuated
Connection	4mm Push-in fitting
Nominal size	2,5mm
Pressure range	2...10bar
Flow rate	60NI/min
Actuation force	6N at 6 bar
Medium	filtered and lubricated or non-lubricated compressed air
Note	CAD files are available in the STASTO Store at www.stasto.eu

MA .. 4 Actuation Cam/spring





		Function	Type
		3/2-way NC	PM140-04-C

MV .. 4 Actuation Cam/spring, for panel mounting





		Function	Type
		3/2-way NC	MV304
		3/2-way NO	MV314
		2/2-way NC	MV204



MR .. 4 Actuation Roller/spring

		Function	Type
		3/2-way NC	MR304
		3/2-way NO	MR314
		2/2-way NC	MR204

MS .. 4 Actuation Bending roller/spring

		Function	Type
		3/2-way NC	MS304
		3/2-way NO	MS314
		2/2-way NC	MS204

Illustrations non-binding
Design, dimensional and material changes reserved