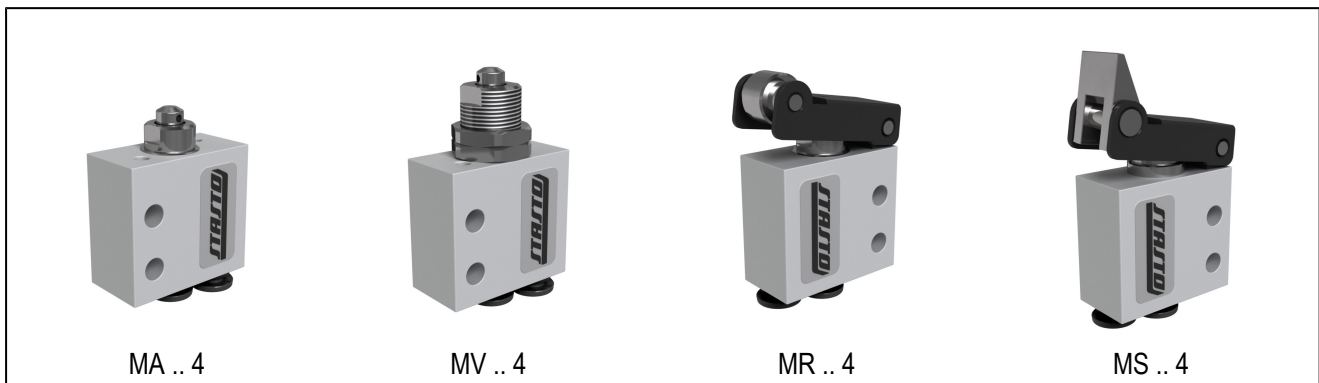
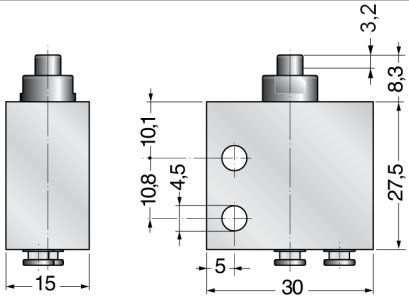





way valves - mechanically operated series MA, MV, MR and MS

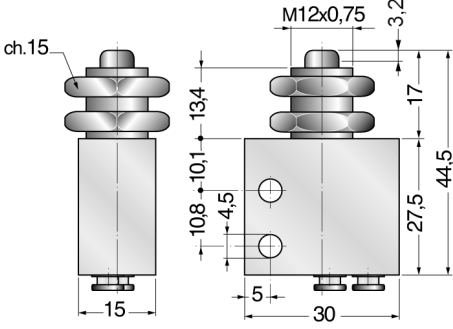





design	seat valve, mechanically operated
connection	4mm push-in fitting
nominal diameter	2,5mm
pressure range	2...10bar
flow rate	60NI/min
operating force	6N at 6bar
medium	filtered and lubricated or non lubricated compressed air
information	CAD files are available on the STASTO Store under www.stasto.eu

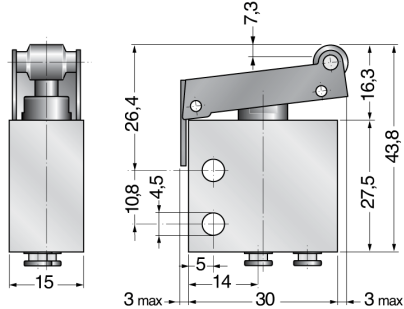



MA .. 4 actuation plunger/spring

	function	type
		3/2-way NC MA304
		3/2-way NO MA314
	2/2-way NC MA204	

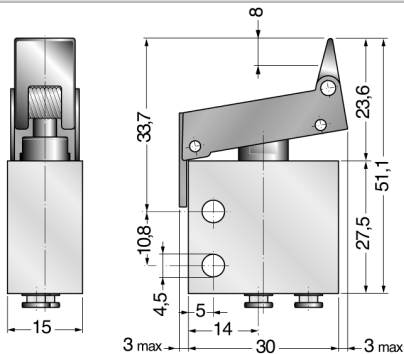



MV .. 4 actuation plunger/spring, for panel mounting

	function	type
		3/2-way NC MV304
		3/2-way NO MV314
	2/2-way NC MV204	

MR .. 4 actuation of roller/spring

		function	type
		3/2-way NC	MR304
		3/2-way NO	MR314
		2/2-way NC	MR204

MS .. 4 actuation unidirectional lever/spring

		function	type
		3/2-way NC	MS304
		3/2-way NO	MS314
		2/2-way NC	MS204

illustrations are non-binding
all designs, configurations, measurements and materials are subject to change without prior notice