

## Connector with integrated pulse generator Type P992364




|                     |                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Design type         | connector according to EN175301-803-Form A                                                                                                                                                                                                                                                                                                                      |
| Function            | this connector has an integrated electronic circuit that can be used to implement pulse control for solenoid coils. The time cycles start when the operating voltage is switched on and the output is switched on. As long as the operating voltage is present, the output cycling repeats. The "TEST" button restarts the cycle and checks the cycle function. |
| Ambient temperature | -25...+60°C                                                                                                                                                                                                                                                                                                                                                     |
| Duty cycle          | 0,5...10 Seconds adjustable                                                                                                                                                                                                                                                                                                                                     |
| Switch-off duration | 0,5...45 minutes adjustable                                                                                                                                                                                                                                                                                                                                     |
| Accuracy            | ± 10%                                                                                                                                                                                                                                                                                                                                                           |

### Electrical Data:

|                      |                                                          |
|----------------------|----------------------------------------------------------|
| Operating voltage    | 24...240V AC/DC, Permissible voltage fluctuation ± 10%   |
| Output voltage       | same as Operating voltage                                |
| Current consumption  | Load current: maximum 1A<br>No-load current: maximum 4mA |
| Degree of protection | IP65 according to EN 60529                               |
| Scope of delivery    | incl. mounting screw and seal NBR                        |

### Dimensions

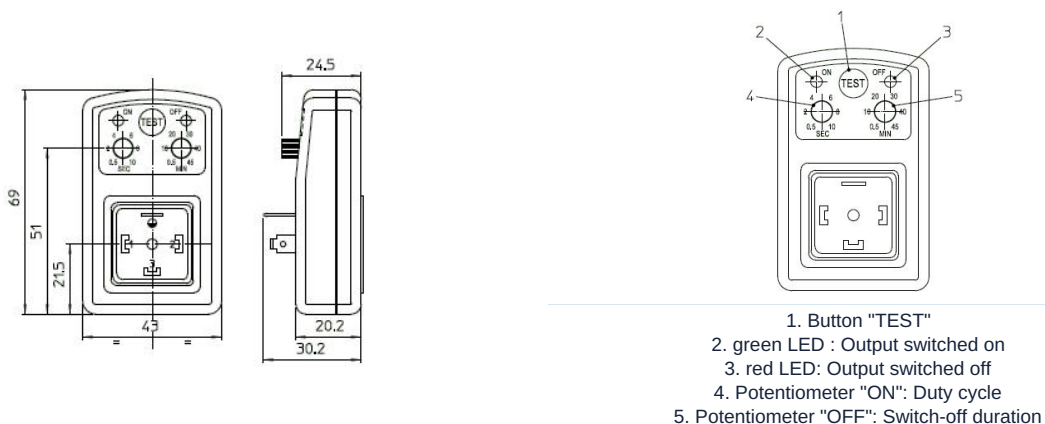

Illustrations non-binding  
Design, dimensional and material changes reserved

