


Filter regulator G3/8" Series Gold FR04




Design type	Diaphragm pressure regulator with secondary venting, Centrifugal force principle filter, Sintered filter element, semi-automatic drain valve or rather automatic drain valve
Connection	G3/8" according to ISO228/1
Materials	Housing Zinc die casting, Condensate reservoir Polycarbonate or Metal, Seal NBR
Function	Control of secondary pressure and filtration of compressed air
Filter element	40µm
Mounting type	Installation in piping system or Wall mounting using mounting bracket
Mounting position	vertical, Drain screw bottom
Medium	Compressed air
Medium temperature	with plastic bowl 0...+60°C, with metal bowl 0...+60°C (with appropriately conditioned compressed air -20...+60°C)
Ambient temperature	with plastic bowl 0...+60°C, with metal bowl -20...+60°C
Inlet pressure	1,5...16bar or rather 1,5...25bar loud table, with automatic drain valve 1,5...16bar
Control ranges	0,5...10bar and 0,5...16bar with metal bowl (0,5...3/ 0,5...6 on request)
Flow direction	is marked by an arrow
Scope of delivery	including pressure gauge



Order code

FR04 - 38 H - 0,5/10 - P - A1									
Connection	3/8"	38							
Flow rate	high flow rate	H							
Pressure range	0,5...3bar	0,5/3							
	0,5...6bar	0,5/6							
	0,5...10bar	0,5/10							
	0,5...16bar	0,5/16							
Reservoir	Plastic reservoir (Leave blank)								
	Plastic reservoir with protective cage	P							
	Metal container	M							
Drain valve	semi-automatic drain valve (Leave blank)								
	automatic drain valve	A1							

Dimensional drawing

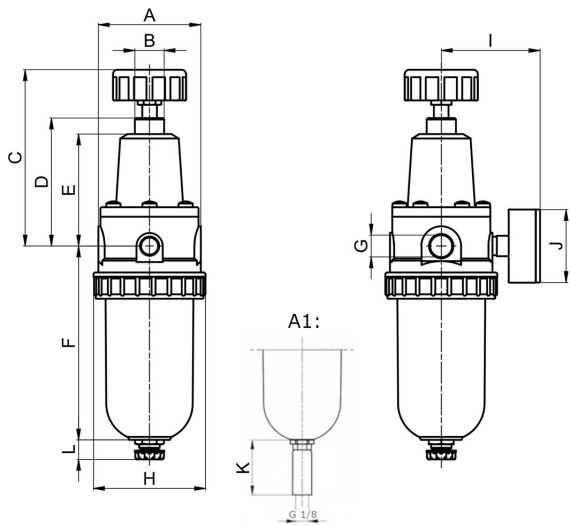

A1: automatic drain valve


Connection G	A	B	C	D	E	F	H	I	J	K	L	Weight [approx. kg]	Type
G3/8"	70	M20x1,5	118	87	75	132	76	73	50	34	13,5	1,33	FR04-38H-0,5/10
G3/8"	70	M20x1,5	118	87	75	132	76	73	50	34	13,5	1,43	FR04-38H-0,5/10-P
G3/8"	70	M20x1,5	118	87	75	132	76	73	50	34	13,5	1,43	FR04-38H-0,5/16-M

Connection	Flow rate at 6 bar* [Nl/min]	max. inlet pressure [bar]	Pressure range [bar]	Type
G3/8"	1500	16	0,5...10	FR04-38H-0,5/10
G3/8"	1500	16	0,5...10	FR04-38H-0,5/10-P
G3/8"	1500	25	0,5...16	FR04-38H-0,5/16-M

*Flow rate data at inlet pressure of 8bar, outlet pressure of 6bar and 1bar Pressure drop



Flow diagram

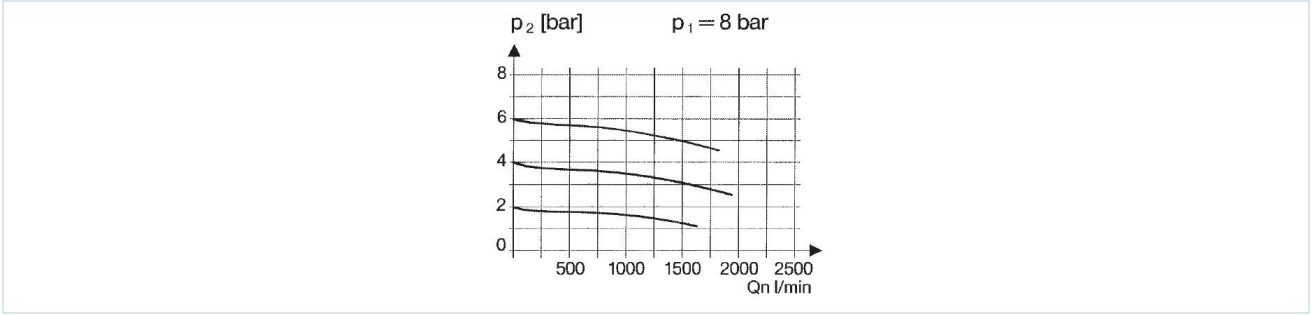

Accessories

Designation	Type
Holding angle with neck nut M20x1,5	MMP04-38/10

Illustrations non-binding
Design, dimensional and material changes reserved

[Pneumatics](#) / [Regulators, filters and lubricators](#) / [Maintenance devices - series Gold](#) / [Filter regulator Series Gold FR04](#) / [\[FR04-38H-0,5/10\] Filter regulator FR04-38H-0,5/10](#)

