


5/2-Way solenoid valve pilot-operated, ISO1 and ISO2 Series PS110, PS111

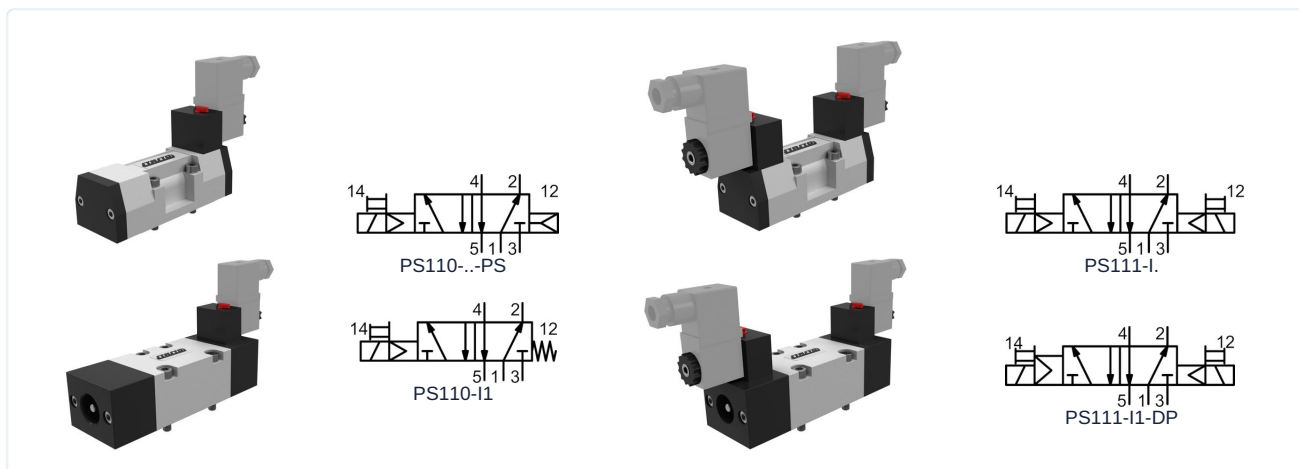

Design type	5/2-way solenoid valve pilot-operated, Actuation electric/internal pilot air, electric/spring, electric/electric or rather electrical differential, Manual emergency override, according to ISO 5599/1 size ISO1 and ISO2
Materials	Body Aluminium, Slide valve Nickel-plated aluminium, Seals NBR
Mounting type	on single valve sub-base plate or rather Valve manifold base plates
Mounting position	any
Medium	filtered and lubricated or non-lubricated compressed air
Medium temperature	0...+40°C
Ambient temperature	-10...+50°C

Electrical data:

Coil type	Type C001 (Standard coil), Connector width 22mm Type EPC (Coil for ATEX areas with 3 m cable) Type SCN Connector width 32mm
Electrical connection	Appliance socket 22mm according to industrial form B or rather 32mm according to EN175301-803 Form A (see separate data sheet)
Standard voltage	230V/50-60Hz, 24V/50-60Hz / 12VDC, 24VDC / 48V/50-60Hz
Special voltages	115V/50-60Hz, further on request
Permissible voltage fluctuation	±10%
Power consumption	see table "Solenoid coil"
Duty cycle	100% duty cycle (continuous operation)
Degree of protection	IP65 according to EN 60529 with correctly mounted device connector (Protection against dust ingress and water jets)

Notes:


	When ordering, please specify voltage and type of current Technical documentation for base plate see separate data sheet CAD files are available in the STASTO Store at www.stasto.eu
--	--



Type code

		PS110 - I1 - PS - M S 22			
	Actuation electric/internal pilot air or rather electric/spring	PS110			
Version	Actuation electric/electric or rather electrical differential	PS111			
	ISO1	I1			
Connection	ISO2	I2			
	Spring or rather electrical (Leave blank)				
	internal pilot air		PS		
Resetting	electrical differential		DP		
	EPC			E	
	C001			M	
Coil	SCN			S	
	without device socket (Leave blank)				
	Standard			S	
	with integrated LED and VDR			L	
Appliance socket	with integrated LED, VDR and PVC cable (2 m)			V	
	Coil C001 24VDC / 48V/50-60Hz, Coil EPC, SCN 24VDC				03
	Coil C001 24V/50-60Hz / 12VDC, Coil EPC, SCN 24V/50-60Hz				04
	12VDC				05
	230V/50-60Hz				22
Voltage	115V/50-60Hz				23

PS110 - Actuation electric/internal pilot air or rather electric/spring

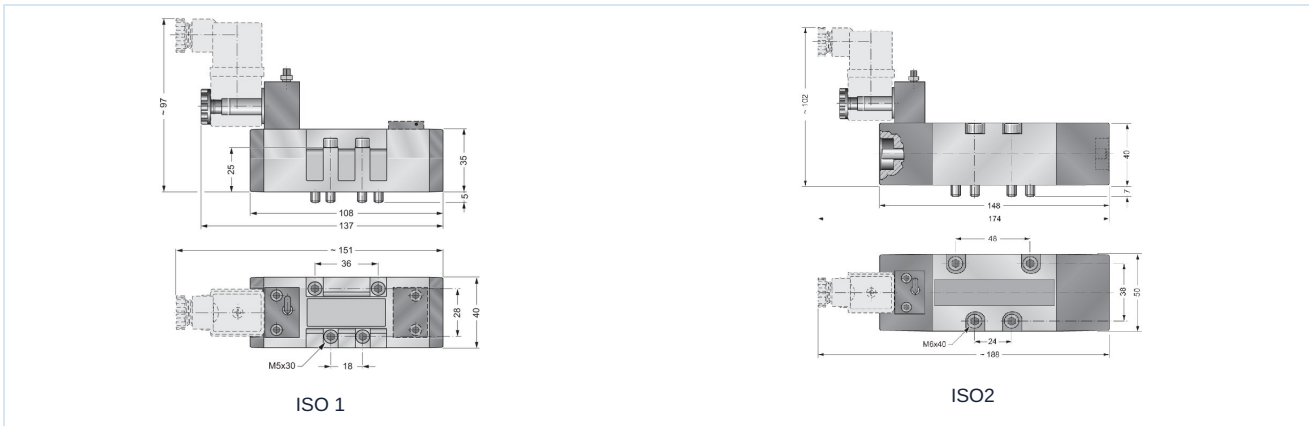


Size	Nominal size DN [mm]	Pressure range [bar]	Flow rate* [Nl/min]	Actuation	nominal max. frequency [Hz]		Switching time [ms]				Type
					AC	DC	AC ONE	AC EXHAUST	DC ONE	DC EXHAUST	
ISO 1	8	2,5-10	1080	electric/internal pilot air	16	13	18	33	21	44	PS110-I1-PS
ISO 1	8	2,5-10	1080	electric/spring	-	-	-	-	-	-	PS110-I1
ISO 2	13	2,5-10	2200	electric/internal pilot air	13	10	21	36	24	47	PS110-I2-PS

*Reference pressure 6bar, Reference temperature 20°C




PS111 - Actuation electric/electric or rather electrical differential

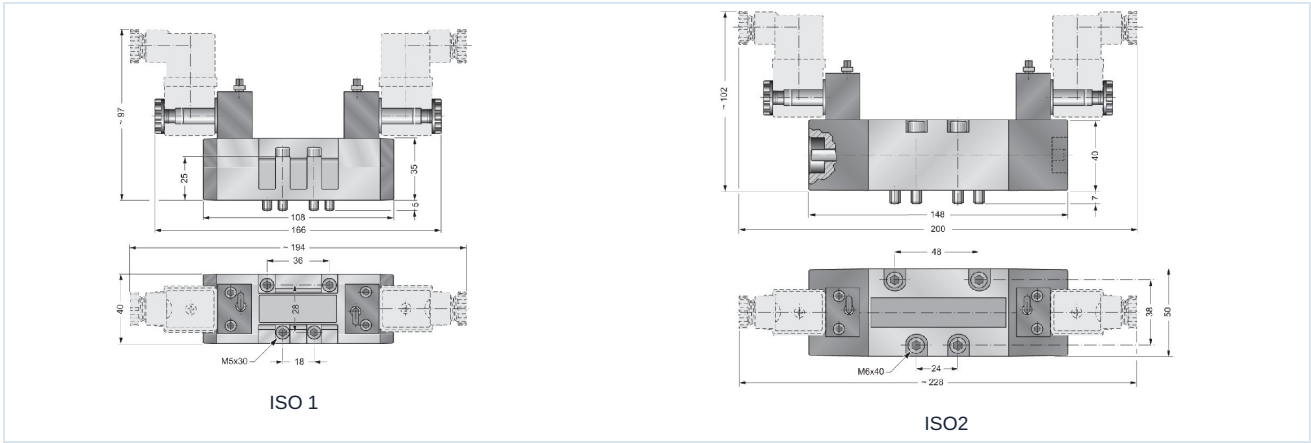




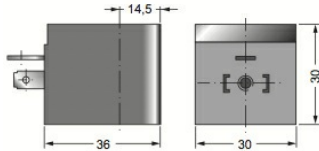

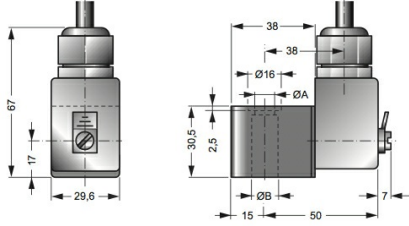
Size	Nominal size DN [mm]	Pressure range [bar]	Flow rate* [Nl/min]	Actuation	nominal max. frequency [Hz]		Switching time [ms]				Type
					AC	DC	AC ONE	AC EXHAUST	DC ONE	DC EXHAUST	
ISO 1	8	1,5-10	1080	electric/electric	27	21	11	11	14	14	PS111-I1
ISO 1	8	1,5-10	1080	electrical differential	25	19	11	12	14	15	PS111-I1-DP
ISO 2	13	1,5-10	2200	electric/electric	13	10	21	36	24	47	PS111-I2

*Reference pressure 6bar, Reference temperature 20°C

Flow diagram

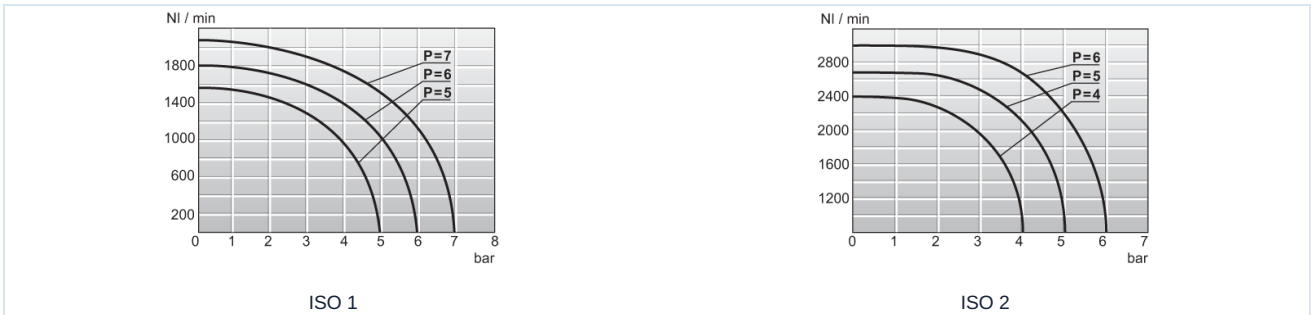

Solenoid coils

		Voltage	Degree of protection	Power consumption at 20°C	Type
		24VDC / 48V/50-60Hz	IP65	3W/5VA	C001-03
		24V/50-60Hz / 12VDC		5VA/3W	C001-04
		230V/50-60Hz		5VA	C001-22
		115V/50-60Hz		5VA	C001-23
		12VDC	IP65	3W	SCN01200
		24VDC		3W	SCN02400
		24V/50-60Hz		5VA	SCN02450
		110V/50-60Hz		5VA	SCN11050
		230V/50-60Hz		5VA	SCN23050
		24VDC	Ex II 2G Ex mb IIC T5 Gb Ex II 2D Ex mb tb IIIC T95°C IP66 Db	3,0W	EPC02400
		24V/50-60Hz		3,2W	EPC02450
		110V/50-60Hz		3,2W	EPC11050
		230V/50-60Hz		3,2W	EPC23050

Illustrations non-binding

Design, dimensional and material changes reserved

Pneumatics / Way-valves - electrically / pneumatically / 5/2- 5/3-way valves - ISO / 5/2-way valve Series PS110

