

Mini solenoid cylinder with adjustable end-position cushioning

Series PC51



Design type	Mini solenoid cylinder according to ISO 6432
Heads	anodized aluminum
Piston rod	Stainless steel 1.4301 knurled
Cylinder tube	anodized aluminum
Seals	NBR
End-position cushioning	pneumatic, adjustable
Ambient temperature	-20...+80°C
Medium temperature	0...+40°C
Lubrication	not necessary
Medium	filtered compressed air
Pressure range	1...10bar
Special version	ATEX version available: II 3GD c T5 T 165° -5 < Ta < 50°C Type XACM/..., XACM/...P
Scope of delivery	incl. Neck and piston rod nut
Note	Technical documentation for accessories see separate data sheet CAD files are available in the STASTO Store at www.stasto.eu Solenoid switch see separate data sheet

Type code

PC 51 - 16 - 25 - VV - 01									
Type	Mini solenoid cylinder, double-acting		51						
Diameter [mm]	16		16						
	20		20						
	25		25						
Stroke [mm]	see table Standard strokes		25						
Special version	continuous piston rod						P		
	Piston rod seal FKM						VS		
	FKM seals						VV		
Special version	described in the item text							01,02,...	




Standard strokes

Ø	10	25	50	80	100	125	160	200	250	300	350	400	450	500
16	•	•	•	•	•	•	•	•	•	•				
20	•	•	•	•	•	•	•	•	•	•	•	•	•	•
25	•	•	•	•	•	•	•	•	•	•	•	•	•	•


Special stroke on request

PC51 - ... - ... double-acting

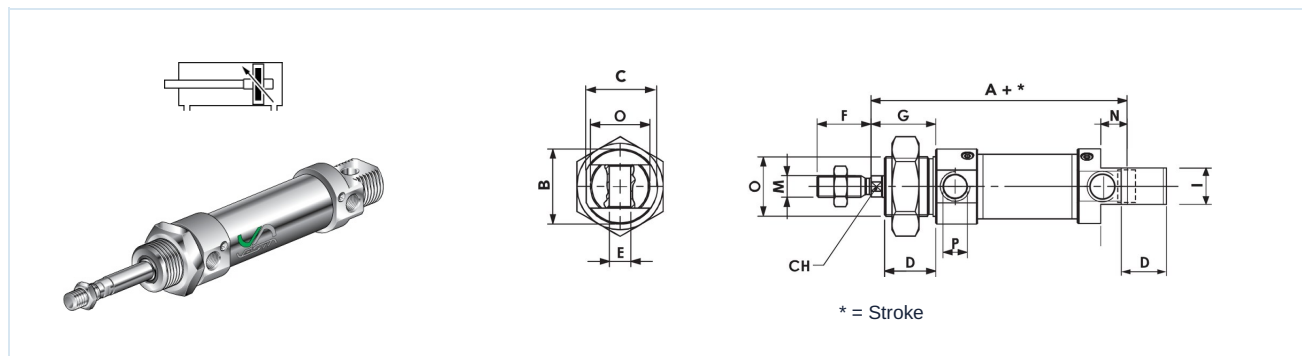

Ø	A	ØB	C	CH	D	ØE H9	F	G	I	ØM	N	ØO	ØP	Type
16	82	19	18	5	18	6	16	22	12	M6x1	9	M16x1,5	M5	PC51-16-...
20	95	27	25,5	7	20	8	20	24	16	M8x1,25	12	M22x1,5	G1/8	PC51-20-...
25	104	30	28,5	9	22	8	22	28	16	M10x1,25	12	M22x1,5	G1/8	PC51-25-...

PC51 - ... - ... - P double-acting, continuous piston rod

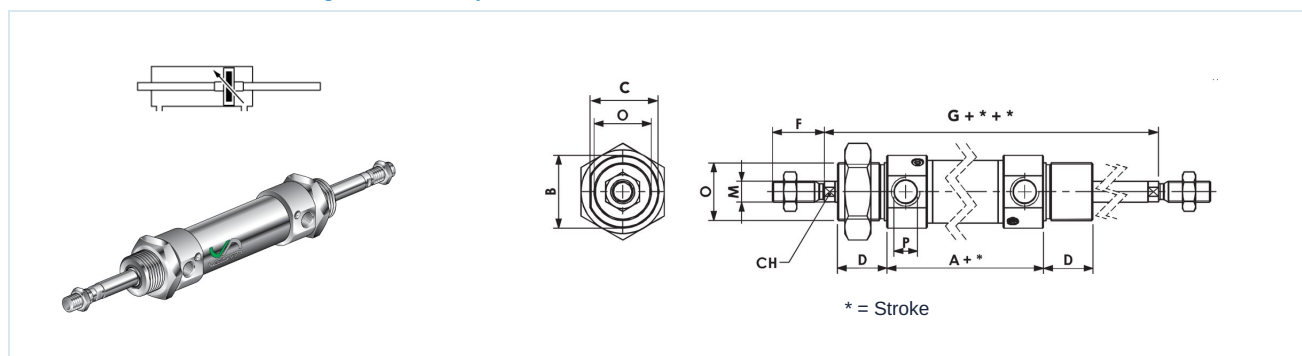

Ø	A	ØB	C	CH	D	F	G	I	ØM	ØO	ØP	Type
16	82	19	18	5	18	16	97	12	M6x1	M16x1,5	M5	PC51-16-...-P
20	95	27	25,5	7	20	20	115	16	M8x1,25	M22x1,5	G1/8	PC51-20-...-P
25	104	30	28,5	9	22	22	124	16	M10x1,25	M22x1,5	G1/8	PC51-25-...-P

Illustrations non-binding

Design, dimensional and material changes reserved

Pneumatics / Cylinders / Cylinders ISO 6432 with accessories / Mini magnetic cylinder Series PC51

Version 9

149639 / Generated 2026/33 EN

MADE IN EUROPE

+43 512 52076

austria@stasto.eu

© STASTO Automation KG

www.stasto.com

Open series online

Page 2 / 2

