

## Monteringstilbehør til minimagnet-sylinder Serie AS, FL, P, DM



AS



FL



P



DM


Materiale

Stål

Merknad

passer til Minimagnetzylinder Serie DVM, ACM

### AS / .. Svingfeste

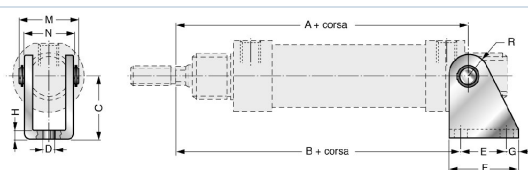


corsa = Slaglengde

| Ø  | A   | B   | C  | ØD  | E  | F  | G | H | M  | N  | R  | Type     |
|----|-----|-----|----|-----|----|----|---|---|----|----|----|----------|
| 12 | 75  | 73  | 27 | 5,5 | 15 | 25 | 5 | 3 | 23 | 18 | 7  | AS/12-16 |
| 16 | 82  | 80  | 27 | 5,5 | 15 | 25 | 5 | 3 | 23 | 18 | 7  | AS/12-16 |
| 20 | 95  | 91  | 30 | 6,6 | 20 | 32 | 6 | 4 | 30 | 24 | 10 | AS/20-25 |
| 25 | 104 | 100 | 30 | 6,6 | 20 | 32 | 6 | 4 | 30 | 24 | 10 | AS/20-25 |

Leveringsomfang: inkl. tværbolt og sikring


### FL / .. Flensmontering

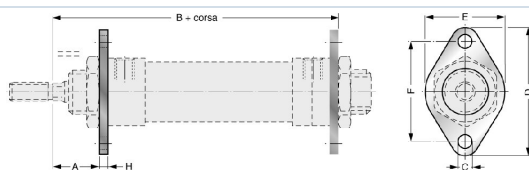

corsa = Slaglengde

| Ø  | A  | B   | ØC  | D  | E  | F  | H | Type     |
|----|----|-----|-----|----|----|----|---|----------|
| 12 | 18 | 77  | 5,5 | 52 | 30 | 40 | 4 | FL/12-16 |
| 16 | 18 | 84  | 5,5 | 52 | 30 | 40 | 4 | FL/12-16 |
| 20 | 19 | 99  | 6,6 | 66 | 40 | 50 | 5 | FL/20-25 |
| 25 | 23 | 107 | 6,6 | 66 | 40 | 50 | 5 | FL/20-25 |

### P / .. Fotfeste

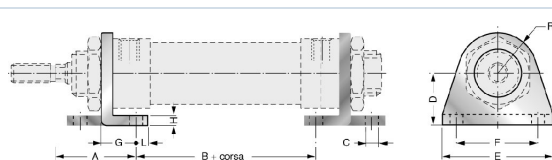


corsa = Slaglengde

| Ø  | A  | B  | ØC  | D  | E  | F  | G  | H | L | R  | Type    |
|----|----|----|-----|----|----|----|----|---|---|----|---------|
| 12 | 32 | 31 | 5,5 | 20 | 42 | 32 | 14 | 4 | 7 | 13 | P/12-16 |
| 16 | 32 | 38 | 5,5 | 20 | 42 | 32 | 14 | 4 | 7 | 13 | P/12-16 |
| 20 | 36 | 46 | 6,6 | 25 | 54 | 40 | 17 | 5 | 7 | 20 | P/20-25 |
| 25 | 40 | 50 | 6,6 | 25 | 54 | 40 | 17 | 5 | 7 | 20 | P/20-25 |

Leveringsomfang: 2 Fotvinkelbrakett, 1 Festemutter

### DM / .. Festemutter



| Ø  | CHD | SD | ØF      | Type     |
|----|-----|----|---------|----------|
| 12 | 24  | 8  | M16x1,5 | DM/12-16 |
| 16 | 24  | 8  | M16x1,5 | DM/12-16 |
| 20 | 32  | 10 | M22x1,5 | DM/20-25 |
| 25 | 32  | 10 | M22x1,5 | DM/20-25 |

Illustrasjoner er ikke bindende

Med forbehold om konstruksjons-, mål- og materialendringer

