

## Accesorios de fijación para cilindro redondo magnético

### Serie AS, CBF, P, DM



AS



CBF



P



GM


Material

Acero

Nota

adecuado para cilindro magnético redondo Serie ACMT, DVMT


#### AS / .. Montaje oscilante



\* = Carrera

| Ø  | X1  | X2  | A  | B  | C  | CH | D  | E  | ØF | ØG | L | M    | N  | O   | P | Q  | Tipo  |
|----|-----|-----|----|----|----|----|----|----|----|----|---|------|----|-----|---|----|-------|
| 32 | 125 | 121 | 35 | 40 | 24 | 13 | 8  | 20 | 7  | 10 | 4 | 38,1 | 20 | 6   | 4 | 47 | AS/32 |
| 40 | 146 | 143 | 40 | 50 | 30 | 17 | 10 | 27 | 9  | 12 | 5 | 46,1 | 28 | 7   | 5 | 53 | AS/40 |
| 50 | 158 | 154 | 45 | 54 | 34 | 19 | 10 | 30 | 9  | 14 | 6 | 57,1 | 36 | 8,5 | 6 | 59 | AS/50 |


#### CBF / .. Pivote oscilante

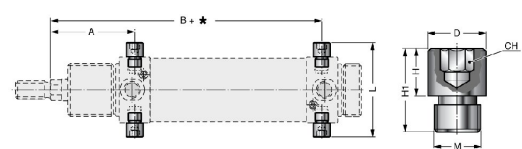

\* = Carrera

| Ø  | A  | B   | CH | ØD | H   | H1   | L  | M       | Tipo   |
|----|----|-----|----|----|-----|------|----|---------|--------|
| 32 | 47 | 125 | 5  | 10 | 8   | 14   | 51 | M8x1    | CBF/32 |
| 40 | 57 | 146 | 6  | 12 | 9,5 | 16,5 | 61 | M10x1   | CBF/40 |
| 50 | 62 | 158 | 6  | 14 | 11  | 20   | 75 | M12x1,5 | CBF/50 |

#### P / .. Fijación al suelo

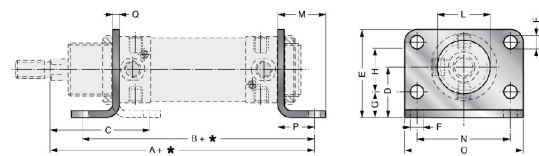


\* = Carrera

| Ø  | A   | B   | C  | D  | E  | F | G  | H  | L  | M  | N  | O  | P  | Q | Tipo   |
|----|-----|-----|----|----|----|---|----|----|----|----|----|----|----|---|--------|
| 32 | 148 | 124 | 48 | 28 | 49 | 7 | 14 | 28 | 30 | 21 | 52 | 66 | 14 | 4 | P/32   |
| 40 | 178 | 153 | 60 | 33 | 58 | 9 | 18 | 30 | 38 | 30 | 60 | 80 | 20 | 5 | P/40   |
| 50 | 190 | 160 | 64 | 40 | 70 | 9 | 20 | 40 | 45 | 30 | 70 | 90 | 20 | 6 | P/50-S |



DM / .. Tuerca de cuello

|  | Ø  | ØD | G  | I | M       | S | Tipo  |
|-----------------------------------------------------------------------------------|----|----|----|---|---------|---|-------|
|                                                                                   | 32 | 45 | 40 | 5 | M30x1,5 | 7 | GM/32 |
|                                                                                   | 40 | 50 | 46 | 5 | M38x1,5 | 8 | GM/40 |
|                                                                                   | 50 | 58 | 52 | 6 | M45x1,5 | 9 | GM/50 |

Ilustraciones no vinculantes  
Reservado el derecho a modificaciones de diseño, dimensiones y materiales

Neumática / Elementos de trabajo / Cilindro redondo con accesorios / Tuerca de cuello Serie GM

