

Magnetski rotacijski cilindar Serija CRW



Izvedba	Magnetski rotacijski cilindar 90°, 180° i 360° po izboru s finim podešavanjem kuta zakretanja (-8°...+5°)
Glave	Visokotlačni lijevani odljevak Aluminijska legura
Tijelo	Aluminijska legura
Osovina	C45 Čelik
Vođenje osovine	Acetal Polimer
Klipni cilindar	Aluminij s poliuretanskim brtvama, magnetom i vodilnim prstenom
Cilindarska cijev	Aluminijski profil tvrdo anodizirano
Brtve	Poliuretan
Prigušenje krajnjeg položaja	pneumatski, podesivo
Temperatura okoline	-10...+80°C
Temperatura medija	0...+40°C
Podmazivanje	nije potrebno
Medij	filtrirani komprimirani zrak
maksimalni radni tlak	10bar
Napomena	tehnička dokumentacija za pribor vidi zasebni podatkovni list CAD-datoteke dostupne su u STASTO Store na www.stasto.eu

Ključ tipa



CRW	— — —	—	—
25 ø25	Zakretni kut	0 s osovinom s čepom	0 Osnovni cilindar
32 ø32	9090°	1 s šupljim vratilom	1 s finim podešavanjem zakretnog kuta
40 ø40	180180°		
50 ø50	360360°		
63 ø63			
80 ø80			
100 ø100			

Teorijski okretni moment [Nm]

Ø	1 bar	2 bar	3 bar	4 bar	5 bar	6 bar	7 bar	8 bar	9 bar	10 bar
25	0,7	1,4	2,1	2,8	3,5	4,2	4,9	5,6	6,3	7
32	1,2	2,4	3,6	4,8	6	7,2	8,4	9,6	10,8	12
40	2,3	4,6	6,9	9,2	11,5	13,8	16,1	18,4	20,7	23
50	4,4	8,8	13,2	17,6	22	26,4	30,8	34,8	39,2	43,6
63	8	16	24	32	40	48	56	64	72	80
80	17,5	35	52,5	70	87,5	105	122	140	157	175
100	32,3	64,6	96,9	129	161	193	226	258	290	323





CRW ... 0 .. s osovinom s čepom

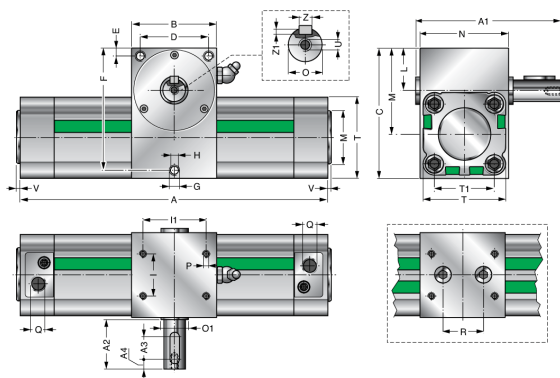

Ø	A 90°	A 180°	A 360°	A1	A2	A3	A4	B	C	D	E	F	ØG	H	I	I1	L	ØM	N	ØO	ØO1	P	Q	R	T	T1	U	V	Z	Z1	Tip
25	159	198	280	67	25	15	7	43	62	34	5	54,5	-	M6x8	25	16	22	-	40	10	12	M5x6	G1/8	20	40	26	M4x9	-	3	2	CRW25..0
32	208	256	351	82	33	15	8	54	74	44	5	69	5,2	M6x12	18	33	27	30	47	14	17	M6x10	G1/8	25	45	32,5	M5x12	4	5	3	CRW32..0
40	235	291	404	91	33	15	8	60	84	46	7	77	6,5	M8x15	22	40	30	35	56	15	17	M6x12	G1/4	25	54	38	M5x15	4	5	3	CRW40..0
50	261	328	460	110	40	24	8	75	102	58	9	93	6,5	M8x15	25	50	39	40	68	18	25	M8x12	G1/4	30	64	46,5	M6x15	4	6	4	CRW50..0
63	306	386	550	124	44	29	8	85	116	69	8	108	8,5	M10x15	35	60	43	45	78	20	30	M8x12	G3/8	40	75	56,5	M6x15	4	6	4	CRW63..0
80	361	471	691	148	48	32	9	110	149	90	10	140	10,5	M12x20	50	80	54	45	98	25	35	M10x15	G3/8	50	93	72	M8x15	4	8	4	CRW80..0
100	402	532	791	177	60	40	10	120	172	96	12	160	10,5	M12x20	60	80	60	55	115	35	50	M10x15	G1/2	60	110	89	M10x15	4	10	5	CRW100..0


CRW ... 1 .. s šupljim vratilom

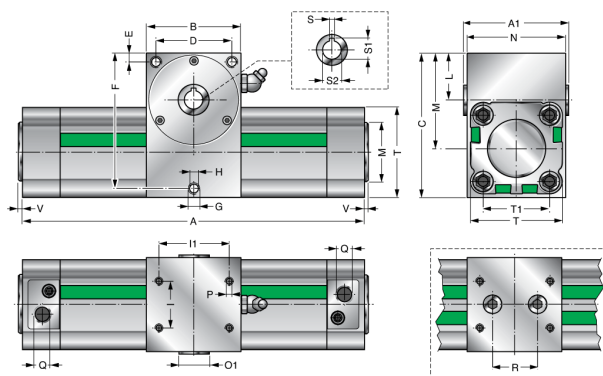

Ø	A 90°	A 180°	A 360°	A1	B	C	D	E	F	ØG	H	I	I1	L	ØM	N	ØO1	P	Q	R	T	T1	V	S	S1	S2	Tip
25	159	198	280	42	43	62	34	5	54,5	-	M6x8	25	16	22	-	40	12	M5x6	G1/8	20	40	26	-	3	9,4	8	CRW25..1
32	208	256	351	49	54	74	44	5	69	5,2	M6x12	18	33	27	30	47	17	M6x10	G1/8	25	45	32,5	4	3	9,4	8	CRW32..1
40	235	291	404	58	60	84	46	7	77	6,5	M8x15	22	40	30	35	56	17	M6x12	G1/4	25	54	38	4	3	11	10	CRW40..1
50	261	328	460	70	75	102	58	9	93	6,5	M8x15	25	50	39	40	68	25	M8x12	G1/4	30	64	46,5	4	5	16	14	CRW50..1
63	306	386	550	80	85	116	69	8	108	8,5	M10x15	35	60	43	45	78	30	M8x12	G3/8	40	75	56,5	4	6	23	20	CRW63..1
80	361	471	691	100	110	149	90	10	140	10,5	M12x20	50	80	54	45	98	35	M10x15	G3/8	50	93	72	4	6	23	20	CRW80..1
100	402	532	791	117	120	172	96	12	160	10,5	M12x20	60	80	60	55	115	50	M10x15	G1/2	60	110	89	4	8	28	25	CRW100..1



CRW ... s pomoću Fino podešavanje zakretnog kuta

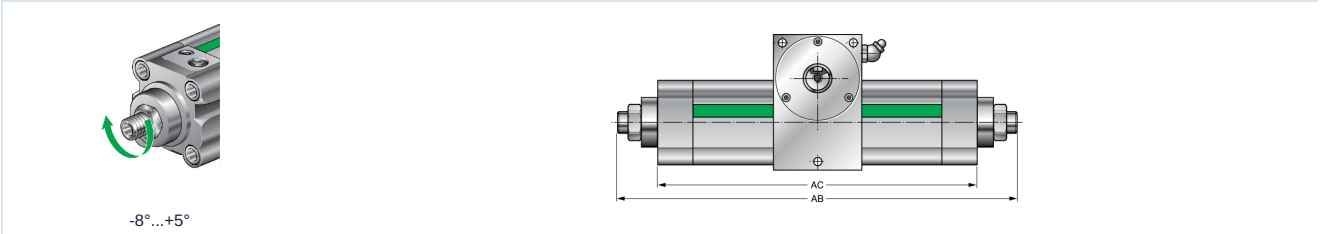

Ø	AC			AB						CH
				90°		180°		360°		
	90°	180°	360°	max.	min.	max.	min.	max.	min.	
25	166	206	288	203	197	244	238	322	317	4 (unutarnji šesterokut)
32	212	260	354	258	250	306	298	400	392	10
40	243	300	413	293	286	350	343	462	456	10
50	275	340	473	319	310	385	377	517	509	10
63	316	396	560	367	357	443	433	612	602	10
80	373	483	703	436	423	546	533	766	753	13
100	417	546	806	481	465	610	594	870	854	13

Ilustracije neobvezujuće
Zadržavamo pravo na konstrukcijske, dimenzijske i materijalne izmjene.

Pneumatika / Radni elementi / Rotacijski cilindar