



## 5/2-Putni klizni ventil, 1/8"...1/2" Serija K52P





|                      |                                                                                        |
|----------------------|----------------------------------------------------------------------------------------|
| Izvedba              | 5/2-putni klizni ventili, Aktiviranje pneumatski/opružno odnosno pneumatski/pneumatski |
| Priključak           | G1/8"...G1/2" prema ISO228/1                                                           |
| Materijali           | Tijelo Niklovani aluminij, Klizač Aluminij, Brtve NBR                                  |
| Način pričvršćivanja | Prolazni provrti u tijelu ventila                                                      |
| Položaj ugradnje     | proizvoljno                                                                            |
| Medij                | filtrirani i podmazani ili nepodmazani komprimirani zrak                               |
| Temperatura medija   | 0...+40°C                                                                              |
| Temperatura okoline  | -10...+50°C                                                                            |

### Napomene:

|          |                                                                                                                                                                     |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Primjena | Veličina ventila 1/8" samo s prigušivačem buke serije SLN-RB                                                                                                        |
|          | tehnička dokumentacija za osnovnu ploču vidi zasebni podatkovni list<br>CAD-datoteke dostupne su u STASTO Store na <a href="http://www.stasto.eu">www.stasto.eu</a> |

### K52P101. Aktiviranje pneumatski/opružno

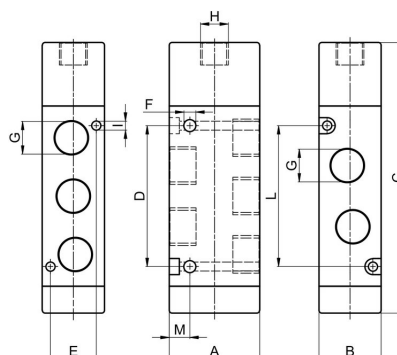
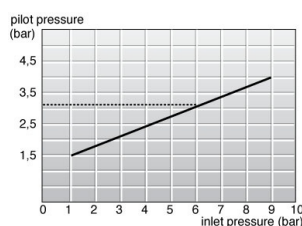


| Priključak<br>G | Nazivni promjer<br>DN [mm] | Raspon tlaka<br>[bar] | A  | B  | C   | D    | E    | F   | H     | I   | L  | M   | Protok*<br>[Nl/min] | Tip      |
|-----------------|----------------------------|-----------------------|----|----|-----|------|------|-----|-------|-----|----|-----|---------------------|----------|
| G1/8"           | 6                          | 3,1...9               | 28 | 18 | 80  | 35   | 13   | 3,2 | G1/8" | 3,2 | 35 | 8   | 690                 | K52P1018 |
| G1/4"           | 8                          | 3,1...9               | 32 | 22 | 96  | 50   | 16,2 | 4,2 | G1/8" | 3,5 | 50 | 7,3 | 1300                | K52P1014 |
| G1/2"           | 14                         | 3,1...9               | 50 | 30 | 137 | 74,6 | -    | 5,2 | G1/8" | -   | -  | 11  | 4000                | K52P1012 |

\*Referentni tlak 6bar, Referentna temperatura 20°C




K52P201. Aktiviranje pneumatski/pneumatski

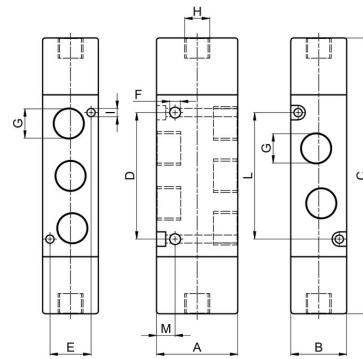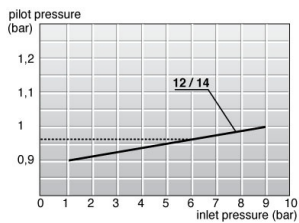


| Priključak G | Nazivni promjer DN [mm] | Raspon tlaka [bar] | A  | B  | C   | D    | E    | F   | H     | I   | L  | M   | Protok* [NI/min] | Tip      |
|--------------|-------------------------|--------------------|----|----|-----|------|------|-----|-------|-----|----|-----|------------------|----------|
| G1/8"        | 6                       | 1...9              | 28 | 18 | 89  | 35   | 13   | 3,2 | G1/8" | 3,2 | 35 | 8   | 690              | K52P2018 |
| G1/4"        | 8                       | 1...9              | 32 | 22 | 109 | 50   | 16,2 | 4,2 | G1/8" | 3,5 | 50 | 7,3 | 1300             | K52P2014 |
| G1/2"        | 14                      | 1...9              | 50 | 30 | 108 | 74,6 | -    | 5,2 | G1/8" | -   | -  | 11  | 4000             | K52P2012 |

\*Referentni tlak 6bar, Referentna temperatura 20°C


Dijagram protoka

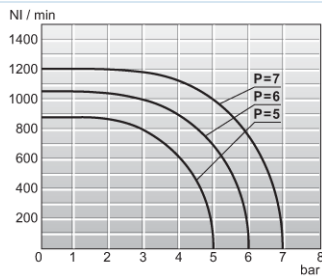

Dijagram protoka 1/8"

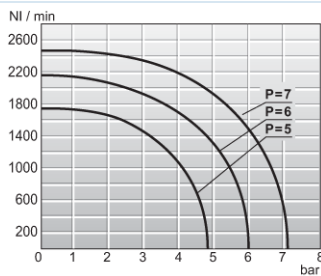

Dijagram protoka 1/4"

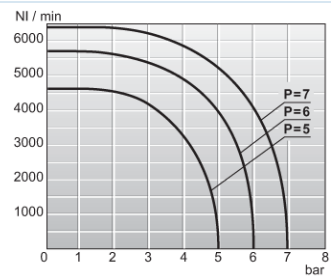

Dijagram protoka 1/2"

Ilustracije neobvezujuće  
Zadržavamo pravo na konstrukcijske, dimenzijske i materijalne izmjene.

Pneumatika / Razvodni ventili – električni / pneumatski / 3/2-, 5/2-, 5/3-putni ventili – serija K (širina priključka 16 mm) / 5/2-putni ventil Serija K5.P1

Verzija 7

138289 / Generirano 2026/38 HR

PROIZVEDENO U EUROPI

+381 11 2399521  
balkan@stasto.eu  
© STASTO Automatizacija d.o.o.

www.stasto.rs  
Otvori seriju online  
Stranica 2 / 2

