


5/2-Putni klizni ventil, 1/8" do 1/2" Serija V52V




Izvedba	5/2-putni klizni ventil, Aktiviranje pneumatski/opružno, pneumatski/interni upravljački zrak odnosno pneumatski/pneumatski
Priključak	G1/8"...G1/2" prema ISO228/1
Materijali	Tijelo Aluminij, Klizač Niklovani aluminij, Brtve NBR
Način pričvršćivanja	Prolazni provrti u tijelu ventila
Položaj ugradnje	proizvoljno
Medij	filtrirani i podmazani ili nepodmazani komprimirani zrak
Temperatura medija	0...+40°C
Temperatura okoline	-10...+50°C
Napomena	CAD datoteke dostupne su u STASTO Storeu na www.stasto.eu


Dijagram protoka

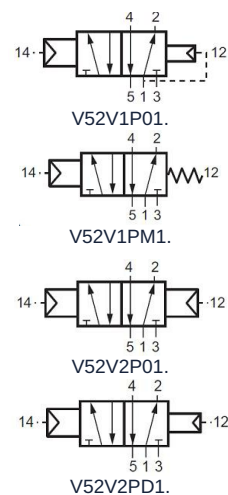

Dijagram protoka 1/8"



Dijagram protoka 1/4"




Dijagram protoka 1/2"



V52V1P ... Aktiviranje pneumatski/opružno, pneumatski/interni upravljački zrak




vertikalna osovina: Upravljački tlak
horizontalna os: Radni tlak

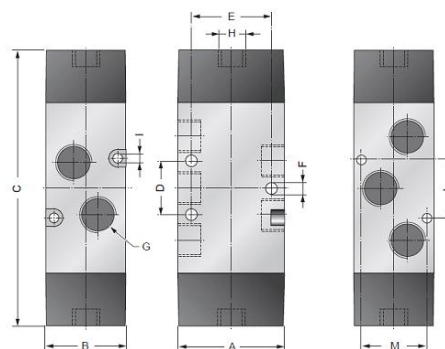


Priključak G	Nazivni promjer DN [mm]	Raspon tlaka [bar]	Protok*	Povrat opruge	A	B	C	D	E	F	H	I	L	M	Tip
G1/8"	6	2,7-10	650	Opruga	30	26	74	18	23	4,25	1/8"	3,25	28,6	20	V52V1PM18
G1/8"	6	2,7-10	650	unutarnji upravljački zrak	30	26	74	18	23	4,25	1/8"	3,25	28,6	20	V52V1P018
G1/4"	8	2,7-10	1080	Opruga	40	30	81,5	20	30	4,25	1/8"	3,25	21	24,6	V52V1PM14
G1/4"	8	2,7-10	1080	unutarnji upravljački zrak	40	30	81,5	20	30	4,25	1/8"	3,25	21	24,6	V52V1P014
G1/2"	15	2,7-10	3500	Opruga	60	40	127	40	50	5,5	1/8"	-	-	-	V52V1PM12
G1/2"	15	2,7-10	3500	unutarnji upravljački zrak	60	40	127	40	50	5,5	1/8"	-	-	-	V52V1P012

*Referentni tlak 6 bar, Referentna temperatura 20°C

V52P2... Aktiviranje pneumatski/pneumatski



vertikalna osovina: Upravljački tlak
horizontalna os: Radni tlak

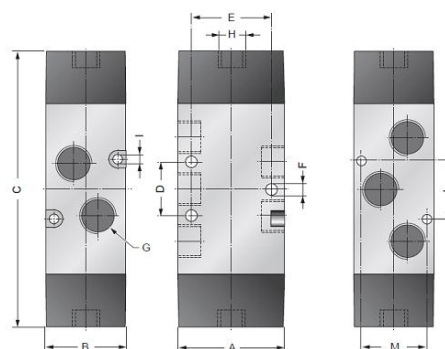

Priključak G	Nazivni promjer DN [mm]	Raspon tlaka [bar]	Protok*	A	B	C	D	E	F	H	I	L	M	Tip
G1/8"	6	1,3-10	650	30	26	79	18	23	4,25	1/8"	3,25	28,6	20	V52V2P018
G1/8"	6	1,3-10	650	30	26	79	18	23	4,25	1/8"	3,25	28,6	20	V52V2PD18
G1/4"	8	1,3-10	1080	40	30	87	20	30	4,25	1/8"	3,25	21	24,6	V52V2P014
G1/4"	8	1,3-10	1080	40	30	87	20	30	4,25	1/8"	3,25	21	24,6	V52V2PD14
G1/2"	15	1,3-10	3500	60	40	132	40	50	5,5	1/8"	-	-	-	V52V2P012
G1/2"	15	1,3-10	3500	60	40	132	40	50	5,5	1/8"	-	-	-	V52V2PD12

Referentni tlak 6 bar, Referentna temperatura 20°C

Ilustracije neobvezujuće

Zadržavamo pravo na konstrukcijske, dimenzijske i materijalne izmjene.

Pneumatika / Razvodni ventili – električni / pneumatski / 3/2-, 5/2-, 5/3-putni ventili – serija E+V (širina utikača 22 mm) / 5/2-putni ventil Serija V5

Verzija 6

138300 / Generirano 2026/38 HR

PROIZVEDENO U EUROPI

+381 11 2399521

balkan@stasto.eu

© STASTO Automatizacija d.o.o.

www.stasto.rs

Otvori seriju online

Stranica 2 / 2

